


# Magnetic Track + Modular LED Lighting System

- 1. Standard series
- 2. Ultra-Slim series

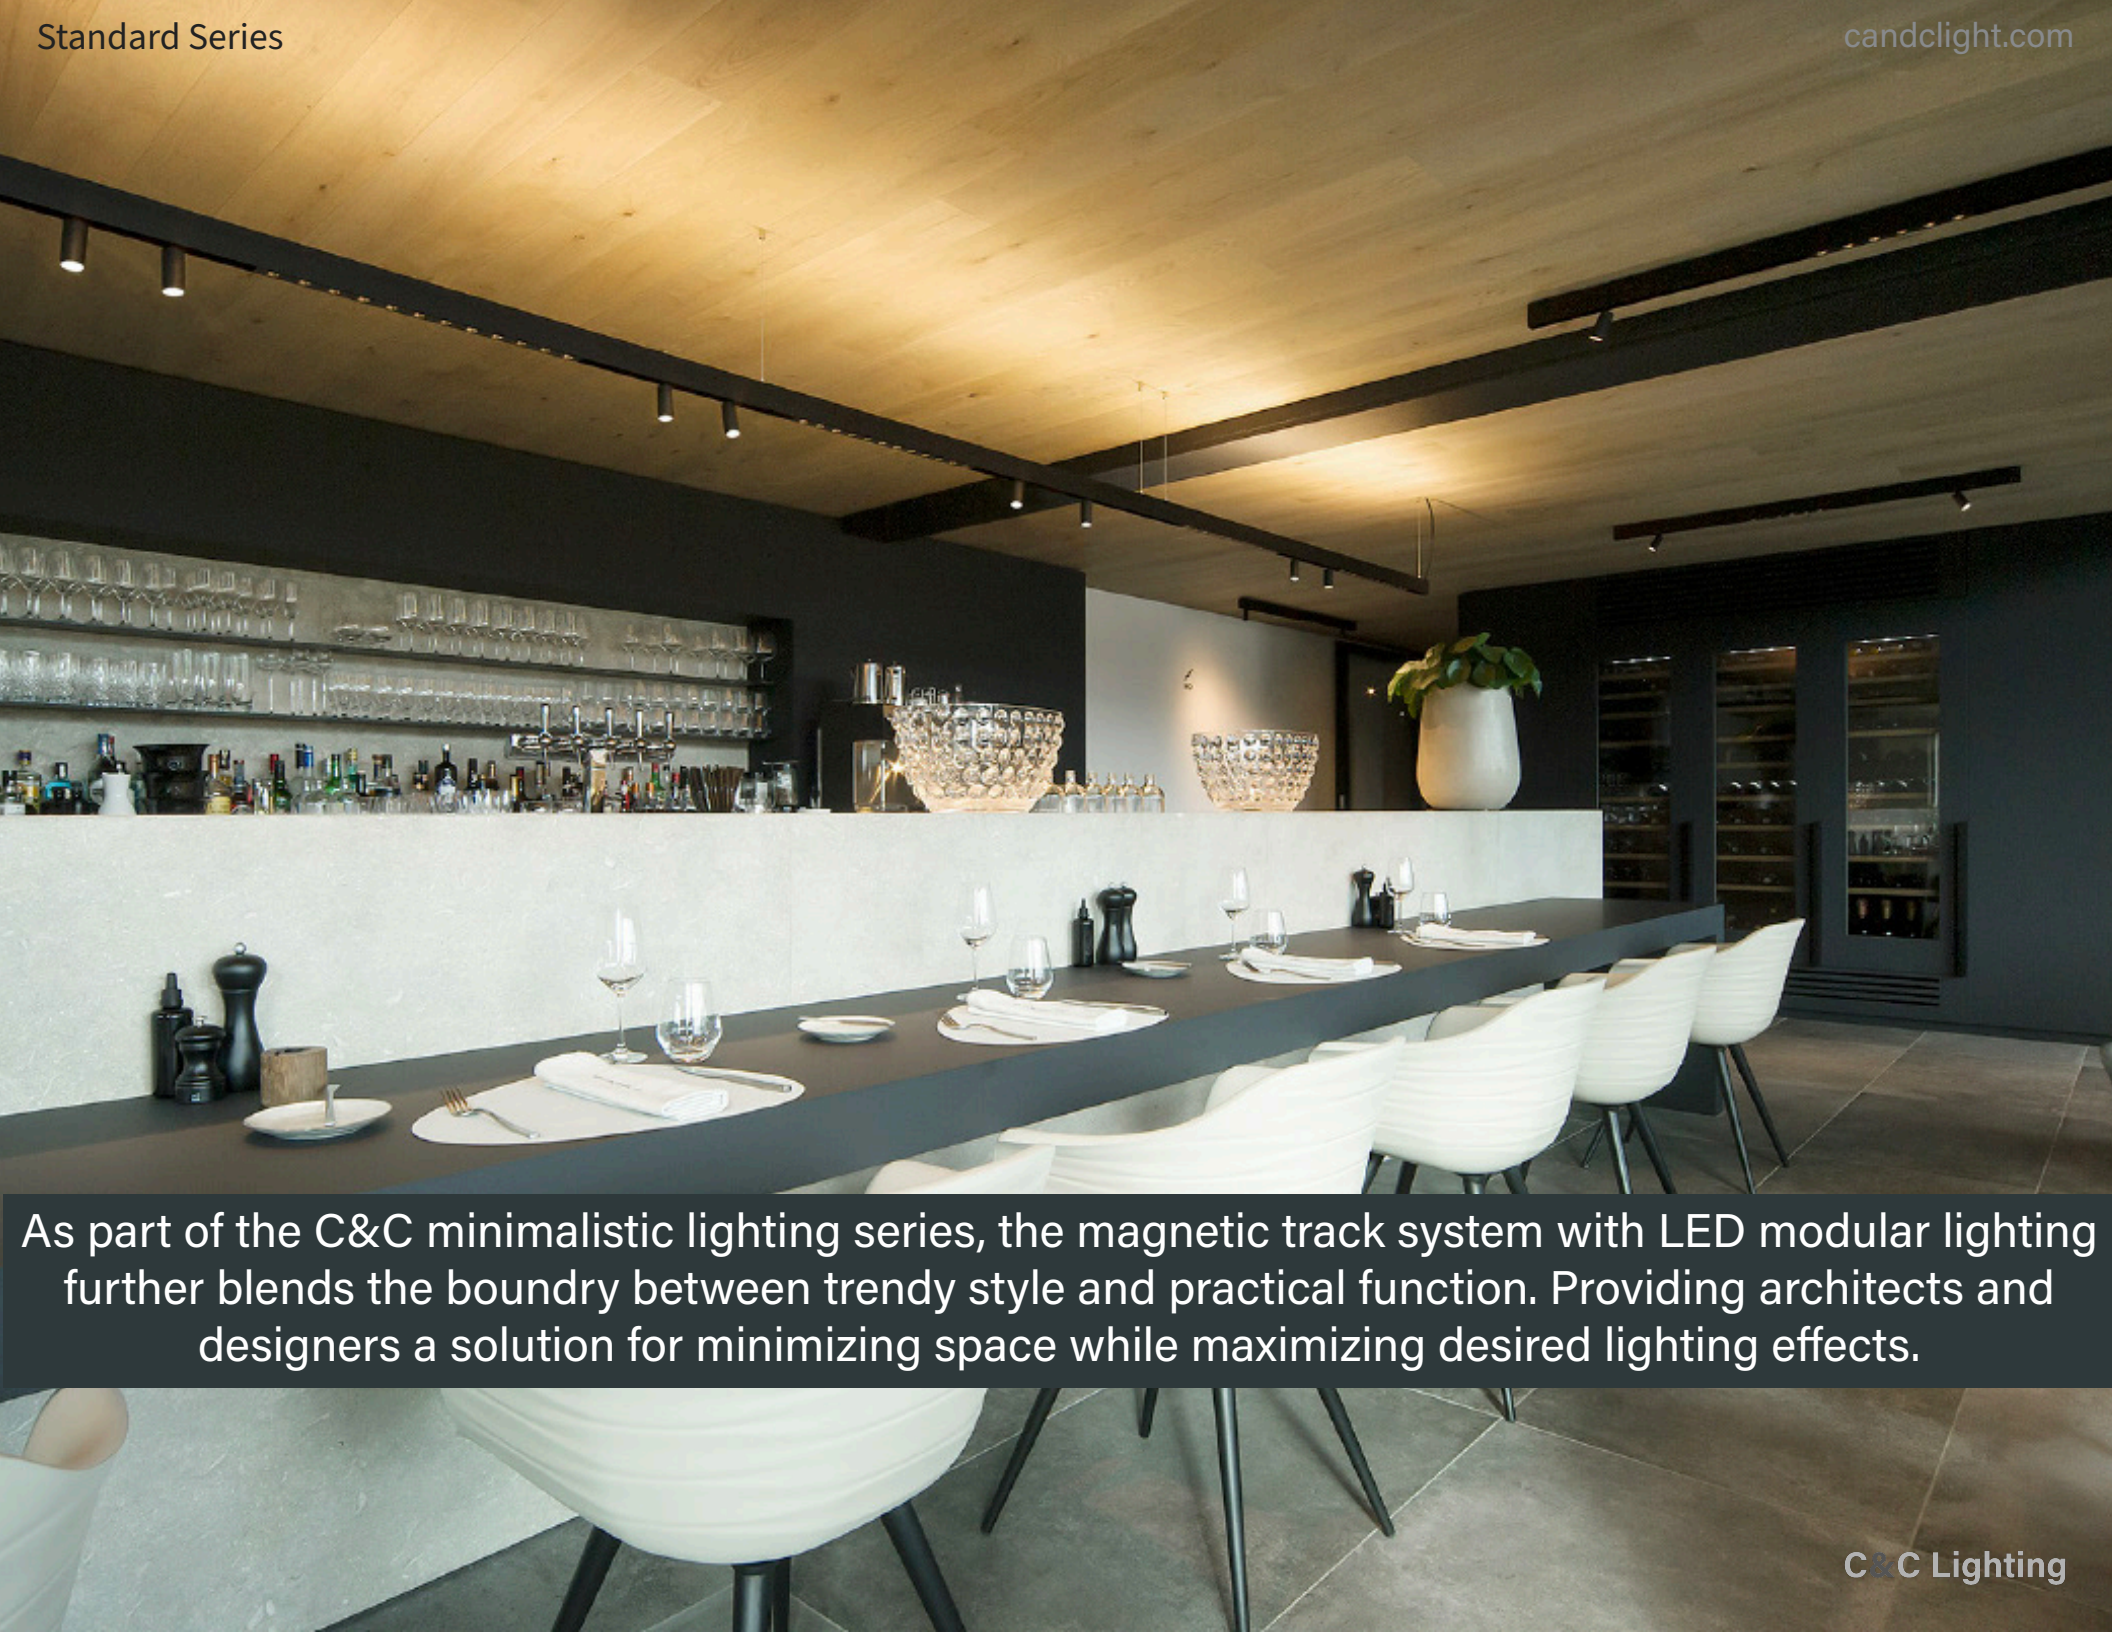

As part of the C&C minimalistic lighting series, the magnetic track system with LED modular lighting further blends the boundary between trendy style and practical function. Providing architects and designers a solution for minimizing space while maximizing desired lighting effects.

2 styles of 48v magnetized track and 4 ways of installation made possible by various accessories



39 x 79 mm



27 x 58 mm



• Recessed



• Surface  
• Pendant  
• Recessed



RECESSED & SEMI-RECESSED  
NON PLASTER & PLASTER  
WALLS & CEILINGS

RECESSED TRIMLESS  
PLASTER  
WALLS & CEILINGS

SURFACE  
ANY SURFACE

SUSPENDED  
CEILING


Recessed kit  
Control the depth  
of the installation

Track driver box  
Connects directly to track  
For all installation types

Track cover

Reach high flexibility in installation while maintaining consistency in style.

# LED Light Modules

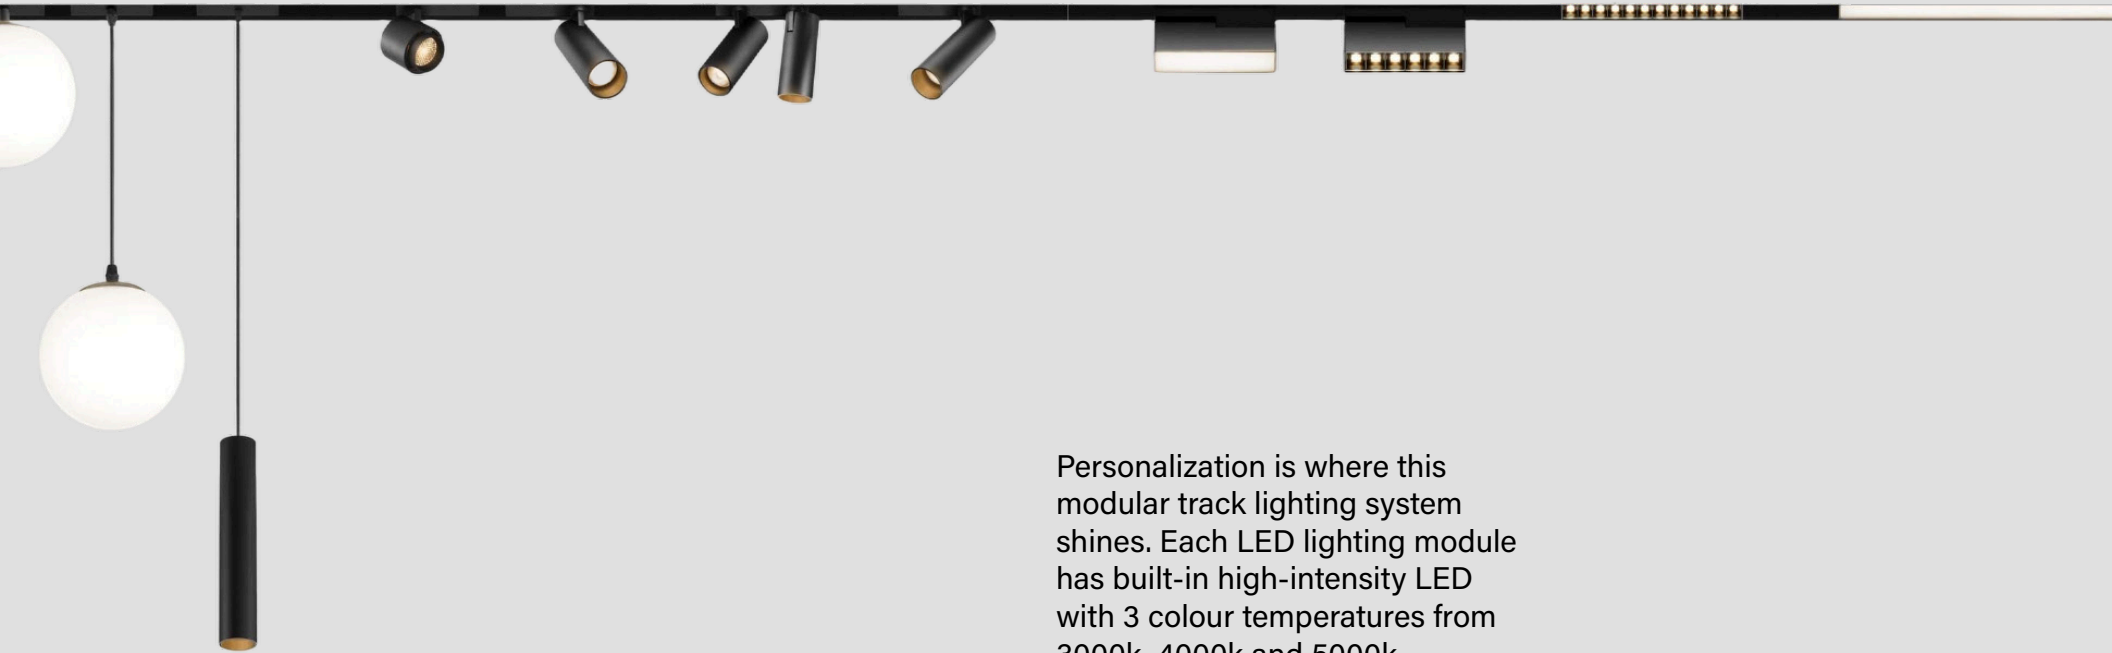



Personalization is where this modular track lighting system shines. Each LED lighting module has built-in high-intensity LED with 3 colour temperatures from 3000k, 4000k and 5000k selectable. Move and be removed when needed. Fulfilling every lighting need, from a wash of colour to spot lighting or to achieve a soft glow.



| Power | CRI          | SDCM | CCT | Beam    | Light output |
|-------|--------------|------|-----|---------|--------------|
| 30W   | > 80<br>> 90 | <3   |     | Diffuse | 1800Lm       |

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 80Ra



| Power | CRI          | SDCM | CCT | Beam    | Light output |
|-------|--------------|------|-----|---------|--------------|
| 8W    | > 80<br>> 90 | <3   |     | Diffuse | 460Lm        |

■ Sandy Black □ Sandy White


**LIGHT DISTRIBUTION**  
3000K 80Ra



| Power | CRI          | SDCM | CCT | Beam    | Light output |
|-------|--------------|------|-----|---------|--------------|
| 16W   | > 80<br>> 90 | <3   |     | Diffuse | 900Lm        |

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 80Ra



| Power | CRI          | SDCM | CCT | Beam              | Light output |
|-------|--------------|------|-----|-------------------|--------------|
| 16W   | > 80<br>> 90 | <3   |     | 12°<br>34°<br>48° | 1550Lm       |

■ Sandy Black □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 80Ra

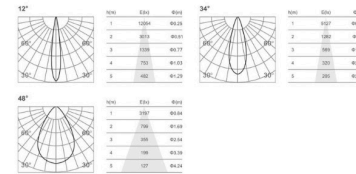

| Power | CRI          | SDCM | CCT | Beam              | Light output |
|-------|--------------|------|-----|-------------------|--------------|
| 8W    | > 80<br>> 90 | <3   |     | 12°<br>34°<br>48° | 790Lm        |

■ Sandy Black □ Sandy White


**LIGHT DISTRIBUTION**  
3000K 80Ra

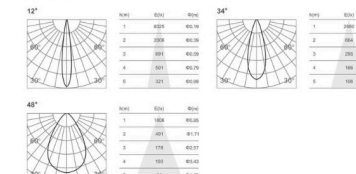

| Power | CRI          | SDCM | CCT | Beam              | Light output |
|-------|--------------|------|-----|-------------------|--------------|
| 16W   | > 80<br>> 90 | <3   |     | 12°<br>34°<br>48° | 1550Lm       |

■ Sandy Black □ Sandy White

**LIGHT DISTRIBUTION**  
3000K 80Ra


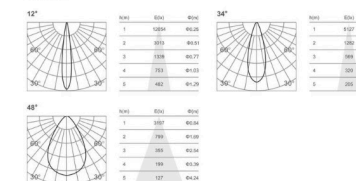




| Power     | CRI          | SDCM | CCT | Beam                     | Light output |
|-----------|--------------|------|-----|--------------------------|--------------|
| <b>5W</b> | > 80<br>> 90 | <3   |     | 20°<br>30°<br>40°<br>60° | <b>440Lm</b> |

■ Sandy Black    □ Sandy White    ■ Brushed Gold



**LIGHT DISTRIBUTION**  
3000K 80Ra

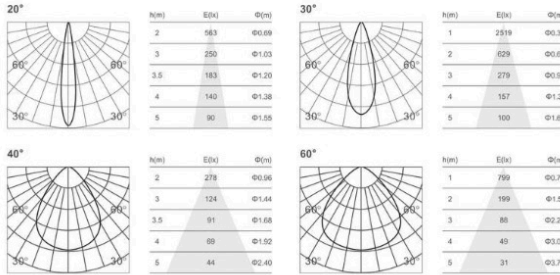

| Power     | CRI          | SDCM | CCT | Beam           | Light output |
|-----------|--------------|------|-----|----------------|--------------|
| <b>5W</b> | > 80<br>> 90 | <3   |     | <b>Diffuse</b> | <b>290Lm</b> |

■ Sandy Black    □ Sandy White



**LIGHT DISTRIBUTION**  
3000K 80Ra



| Power     | CRI          | SDCM | CCT | Beam                     | Light output |
|-----------|--------------|------|-----|--------------------------|--------------|
| <b>5W</b> | > 80<br>> 90 | <3   |     | 20°<br>30°<br>40°<br>60° | <b>440Lm</b> |

■ Sandy Black    □ Sandy White    ■ Brushed Gold



**LIGHT DISTRIBUTION**  
3000K 80Ra

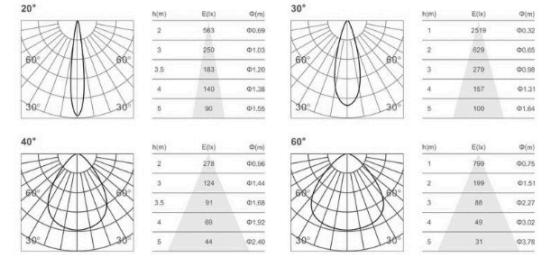



| Power       | CRI          | SDCM | CCT | Beam                     | Light output |
|-------------|--------------|------|-----|--------------------------|--------------|
| <b>2x5W</b> | > 80<br>> 90 | <3   |     | 20°<br>30°<br>40°<br>60° | <b>880Lm</b> |

■ Sandy Black    □ Sandy White    ■ Brushed Gold


**LIGHT DISTRIBUTION**  
3000K 80Ra

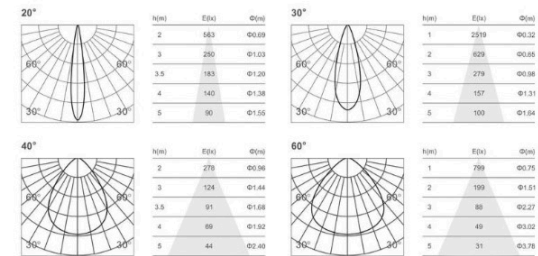

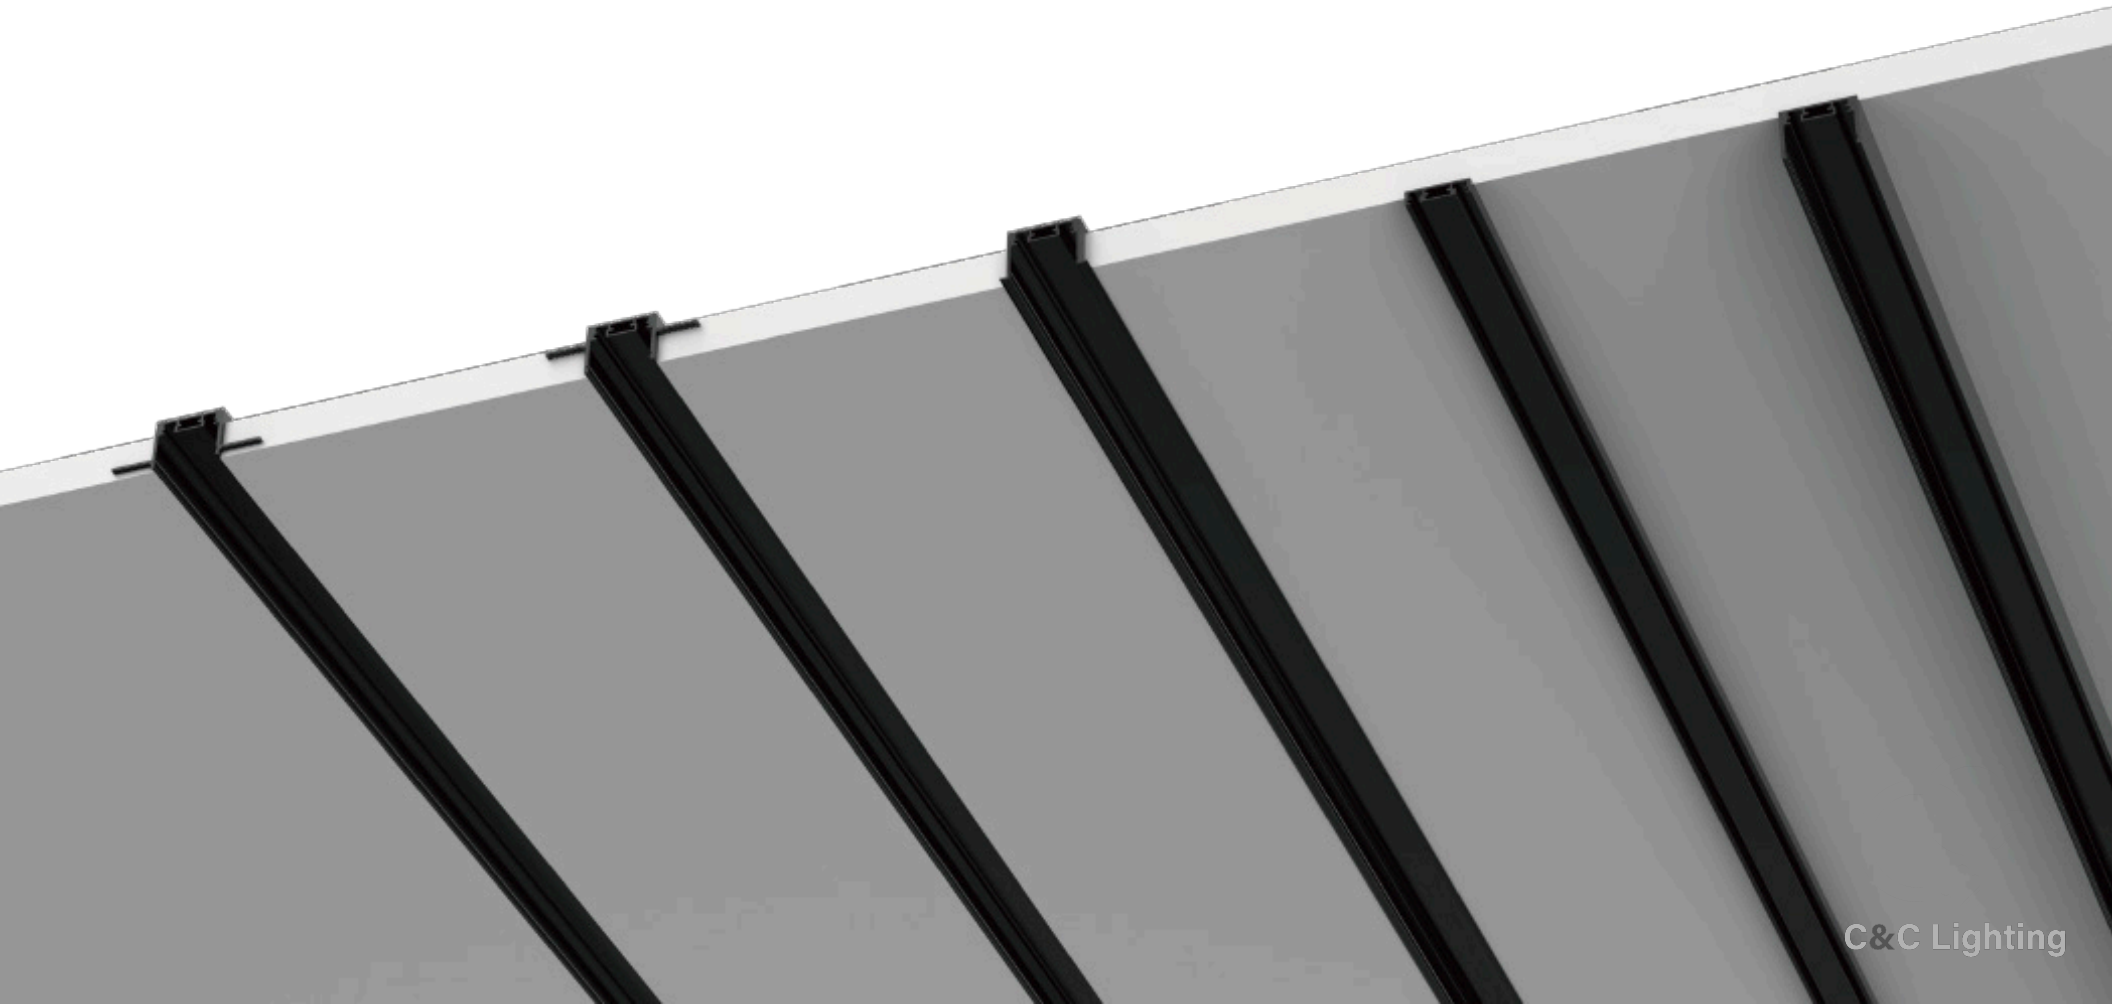

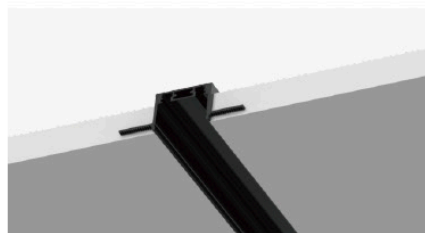

CB-W2010

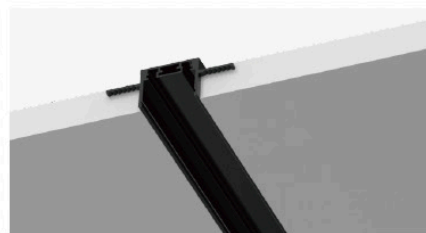


CB-N2010




| Model Code  | CB-W2010     | CB-W2020     | CB-W2020     |
|-------------|--------------|--------------|--------------|
| Size(LxWxH) | 1000*55*19mm | 2000*55*19mm | 3000*55*19mm |

| Model Code  | CB-N2010     | CB-N2020     | CB-N2020     |
|-------------|--------------|--------------|--------------|
| Size(LxWxH) | 1000*55*19mm | 2000*55*19mm | 3000*55*19mm |

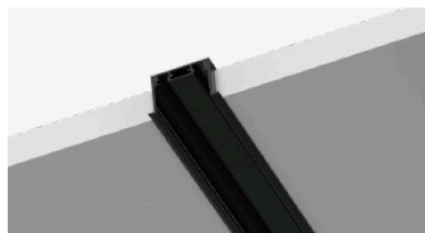

CB-Z2010

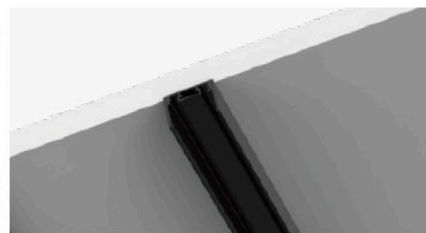

CB-MG2010



| Model Code  | CB-Z2010     | CB-Z2020     | CB-Z2020     |
|-------------|--------------|--------------|--------------|
| Size(LxWxH) | 1000*30*19mm | 2000*30*19mm | 3000*30*19mm |

| Model Code  | CB-MG2010    | CB-MG2020    | CB-MG2020    |
|-------------|--------------|--------------|--------------|
| Size(LxWxH) | 1000*25*19mm | 2000*25*19mm | 3000*25*19mm |

Related accessories  
相关配件

**CB—体化48V电源**  
Integrated 48V power supply  
Model: CB-DY-100W  
Size(LxWxH) : 295\*22\*13mm

**Integrated 48V power supply**  
Model: CB-DY-200W  
Size(LxWxH) : 408\*22\*13mm

**转角连接头**  
Corner connector  
Model: CB-G03  
Size(LxWxH) : 157\*22\*13mm

**Straightconnector**  
Model:CB-G01  
Size(LxWxH): 80\*22\*13mm



Length specification: 1000/2000mm



CB-M2010

| Model Code  | CB-M2010      | CB-M2020      | CB-M2020      |
|-------------|---------------|---------------|---------------|
| Size(LxWxH) | 1000x22x5.7mm | 2000x22x5.7mm | 3000x22x5.7mm |

Related accessories

**Integrated 48V power supply**  
Model: CB-DY-100W  
Size(LxWxH) : 295\*22\*13mm

**Integrated 48V power supply**  
Model: CB-DY-200W  
Size(LxWxH) : 408\*22\*13mm

**CBdirectdirecthead**  
Model: CB-M01  
Size(LxWxH):22\*22\*0.5mm


**CBhorizontal90degreecorner**  
Model:CB-M02  
Size(LxWxH): 22\*22\*0.5mm

**CBvertical90degreecorner**  
Model:CB-M03  
Size(LxWxH): 22\*22\*0.5mm

**CBT-shapedcorner**  
Model:CB-M04  
Size(LxWxH): 22\*22\*0.5mm

**CBCrossCorner**  
Model: CB-M05  
Size(LxWxH):22\*22\*0.5mm







### KTGS-12C





| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle      | Size           |
|------------------|-------------|-----|-----|-----------------|----------------|
| KTGS-6C          | 6W          | <19 | >90 | 15° / 24° / 36° | L129*W22*H35mm |
| KTGS-12C         | 12W         | <19 | >90 | 15° / 24° / 36° | L243*W22*H35mm |
| KTGS-18C         | 18W         | <19 | >90 | 15° / 24° / 36° | L357*W22*H35mm |



### ZDGS-12C




| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle      | Size           |
|------------------|-------------|-----|-----|-----------------|----------------|
| ZDGS-6C          | 6W          | <19 | >90 | 15° / 24° / 36° | L111*W22*H62mm |
| ZDGS-12C         | 12W         | <19 | >90 | 15° / 24° / 36° | L222*W22*H62mm |



### FG-10C




| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle | Size           |
|------------------|-------------|-----|-----|------------|----------------|
| FG-10C           | 10W         | <19 | >90 | 120°       | L300*W22*H13mm |
| FG-15C           | 15W         | <19 | >90 | 120°       | L450*W22*H13mm |
| FG-20C           | 20W         | <19 | >90 | 120°       | L600*W22*H13mm |



### GS-12C




| Model code | Power | UGR | CRI | Beam angle      | Size           |
|------------|-------|-----|-----|-----------------|----------------|
| GS-6C      | 6W    | <19 | >90 | 15° / 24° / 36° | L135*W22*H13mm |
| GS-12C     | 12W   | <19 | >90 | 15° / 24° / 36° | L248*W22*H13mm |
| GS-18C     | 18W   | <19 | >90 | 15° / 24° / 36° | L362*W22*H13mm |
| GS-24C     | 24W   | <19 | >90 | 15° / 24° / 36° | L476*W22*H13mm |



### GD-4010C




| Model code | Power | UGR | CRI | Beam angle      | Size      |
|------------|-------|-----|-----|-----------------|-----------|
| GD-4010C   | 10W   | <19 | >90 | 15° / 24° / 36° | ∅60*H85mm |



### GD-357C




| Model code | Power | UGR | CRI | Beam angle      | Size      |
|------------|-------|-----|-----|-----------------|-----------|
| GD-355C    | 5W    | <19 | >90 | 15° / 24° / 36° | ∅30*68mm  |
| GD-357C    | 7W    | <19 | >90 | 15° / 24° / 36° | ∅35*100mm |



**CD-305C**

| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle      | Size     |
|------------------|-------------|-----|-----|-----------------|----------|
| CD-305C          | 5W          | <19 | >90 | 15° / 24° / 36° | 30*400mm |

**CD-306C**

| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle | Size   |
|------------------|-------------|-----|-----|------------|--------|
| CD-306C          | 5W          | <19 | >90 | -          | Ø110mm |

**CD-307C**

| 型号<br>Model code | 功率<br>Power | UGR | CRI | Beam angle | Size      |
|------------------|-------------|-----|-----|------------|-----------|
| CD-307C          | 5W          | <19 | >90 | -          | Ø47*400mm |

400

Ø47

