

# LED 80W Adjustable Wall Pack Light



Project

Type


Quantity

Notes

## Certifications



## Technical Drawings

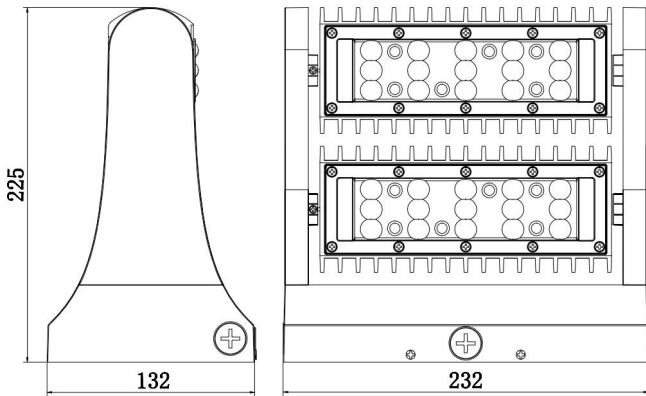

## Line-up

Model No.	Power [W]	Light Output [lm]	Input Voltage [V]	Light Colour [K]	Beam Angle	CRI
<b>CCR-WP-80W-1111-1602</b>	80±10%	9600-10400	100-277VAC 50-60Hz	4000-5700	60°	>70
	Housing	Housing Colour	LED Type	LED Qty	Driver Model	Protection Rate
	Aluminum	Black	CREE MHB-B 2.7W	30pcs	SS-75H-48	IP65



**www.ccrled.com**  
 cledlighting@gmail.com  
 ccrincled@gmail.com


2-91 Esna Park Dr., Markham, L3R 2S2  
 [T] 1.905.698.0359  
 13-170 Esna Park Dr., Markham, L3R 1E3  
 [T] 1.905.604.0143

1-155 Wings Rd., Woodbridge, L4L 6C7  
 [T] 1.905.856.0903  
 64-7250 Keele St., Vaughan, L4K 1Z8  
 [T] 1.647.887.7403


## Photometric Data

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 127.09 lm/W
MODEL		I <sub>max</sub> (cd)	11660	S/MH (C0/180)	0.86	
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH (C90/270)	0.95	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	10059	η UP, DN (C0-180)	0.0, 46.1	
NOMINAL FLUX (lm)	10059.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 53.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.80	

### Luminance Intensity Distribution

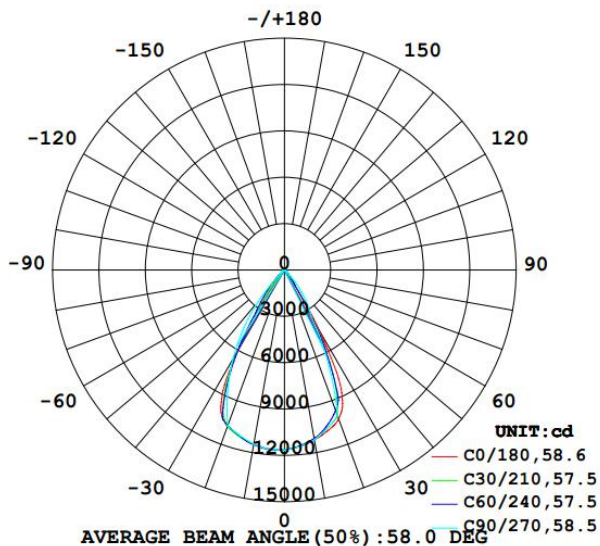

### Cone Lux Diagram

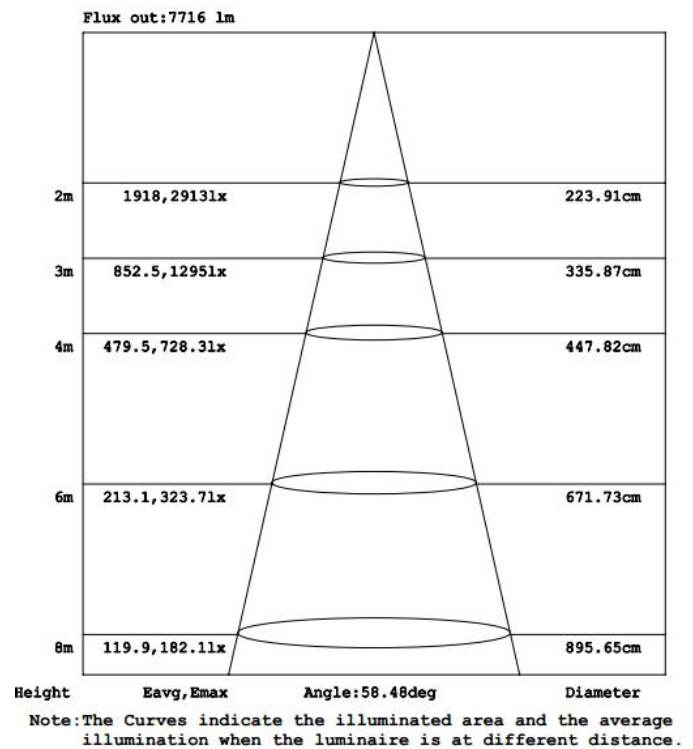

## Environmental Requirements

Operating Temperature	-20°C to 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C to 80°C
Storage Humidity	10%-95% RH
Installation Area	Outdoor mainly (building facades, entryways, factories, warehouses...)

## Package Information

Product Dimensions	465*235*230 mm
Net Weight	3.03 kg
Package Dimensions	495*295*265 mm
Gross Weight	13.80 kg
Quantity	4 pcs/pack



[www.ccrled.com](http://www.ccrled.com)  
 cledlighting@gmail.com  
 ccrinled@gmail.com

2-91 Esna Park Dr., Markham, L3R 2S2  
 [T] 1.905.698.0359  
 13-170 Esna Park Dr., Markham, L3R 1E3  
 [T] 1.905.604.0143

1-155 Wings Rd., Woodbridge, L4L 6C7  
 [T] 1.905.856.0903  
 64-7250 Keele St., Vaughan, L4K 1Z8  
 [T] 1.647.887.7403