

T8 LED Single Pin Tube Light



Project

Type

Quantity

Notes


Certifications



Line-up

Model No.	Watts [W]	Light Output [lm]	Input Voltage [V]	Light Colour [K]	Beam Angle [°]	CRI
T884FUA-36WB-XWMF	36	3960-4320	100-277 50-60Hz	3045±175K 3985±275K 5028±283K 6530±510K	120	>80

Technical Drawing

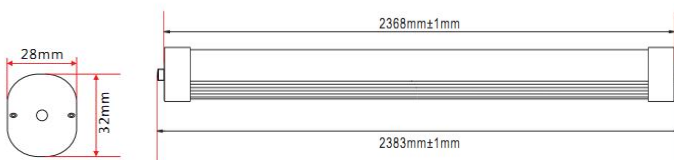


Features


Housing Material	Anodized Aluminum alloy; clear/frosted PC cover
LED	Epistar SMD 2835
Power Input	Single and double ended
Power Factor	≥0.95
Protection Rate	IP20
Application	Indoor only
Lifespan	≥50000Hr
Warrenty	5-year warrenty

Wiring Options



Connecting with Ballast:

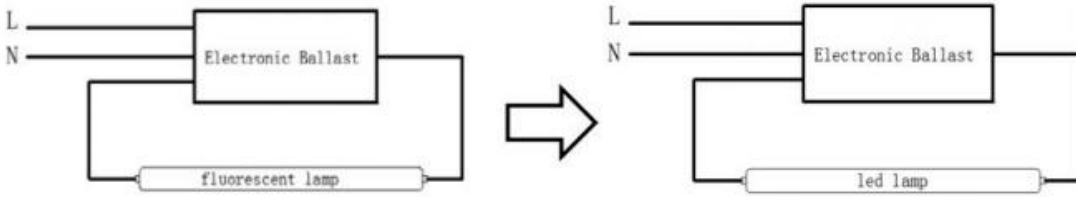

Connecting without Ballast:

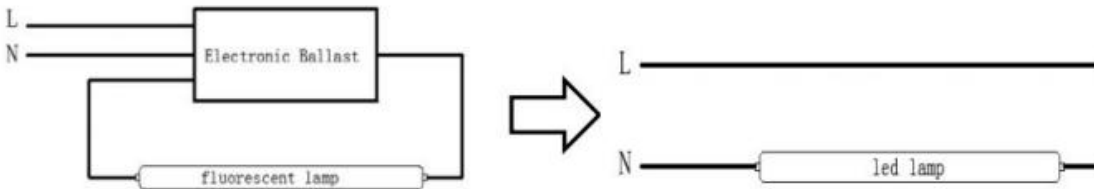

Photometric Data

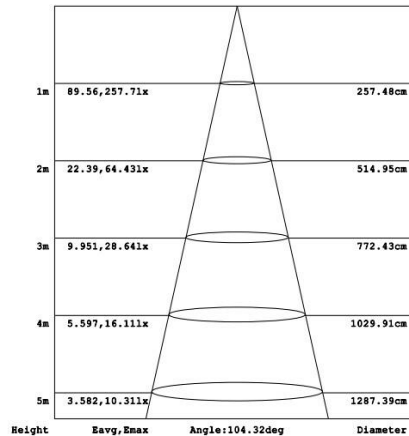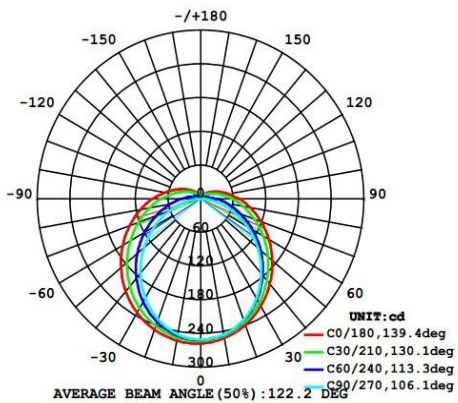

Environmental Requirements

Operating Temperature	-20°C to 45°C
Storage Temperature	-25°C to 65°C
Installation Area	Offices, factories, underground parking lots, schools and etc.

Package Information

Package Dimensions	L2440*W230*H200 mm
Net Weight	0.94 kg/pcs
Gross Weight	23.4 kg/carton
Quantity per Carton	20 pcs



www.ccrled.com
 cledlighting@gmail.com
 ccrincled@gmail.com

2-91 Esna Park Dr., Markham, L3R 2S2
 [T] 1.905.698.0359
 13-170 Esna Park Dr., Markham, L3R 1E3
 [T] 1.905.604.0143

1-155 Wings Rd., Woodbridge, L4L 6C7
 [T] 1.905.856.0903
 64-7250 Keele St., Vaughan, L4K 1Z8
 [T] 1.647.887.7403