

FEATURE:


*** Type A+B (Dual Mode T8 TUBE):**

*** Works with most instant start electronic ballast in North America;**


*** Bypass the ballast and can work sing end input or double end input;**

*** 2ft,3ft,4ft or 8ft lengths and frosted or clear are all available;**

Wiring Diagram



PLUG & PLAY,WORKING WITH INSTANT BALLAST

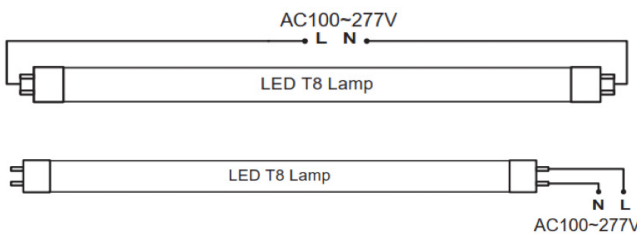

SINGLE-ENDED CONNECTION OR DOUBLE ENDED CONNECTION

Model No.:	T849-4FT-XXM012/15/18 (XX represents CCT)
Watt	18W
Operating Frequency	60Hz
Replaced target Fluorescent lamp	32W/48G13
Lumen	2200LM
Lumen Efficiency	125LM/W
Kelvin	3000K/3500K/4000K/5000K/6500K
Volt	100-277V
Power Factor	0.96
Ballast Type	A+B
Length	4FT
Material	Glass
Finish	Frosted/Clear
Beam Angle	220°
CRI	82
LED Chip Brand	Hongli/Bridgelux
LED Chip Quantity	100PCS
Life Time	50000Hours
Location Rated	Damp
Ambient Operating Temperature	-20°C-40°C
FCC	Yes
ETL	Yes
Warranty	5Years
Package Way	Industrial Package 30pcs/Out box 12000PCS/20GP 29700PCS/40HQ 35160PCS/40HQ No Pallet
Pack size	1250*228*195CM
HS CODE	8539522000