

THE QUILTER

The Quilter is attached to the machine in place of the regular presser foot. See Fig. 156. The bar with the indicator at the right end is adjustable by pushing it to the right or to the left as desired. See A, Fig. 156. The indicator is used to guide each row of sewing by the previous row stitched.

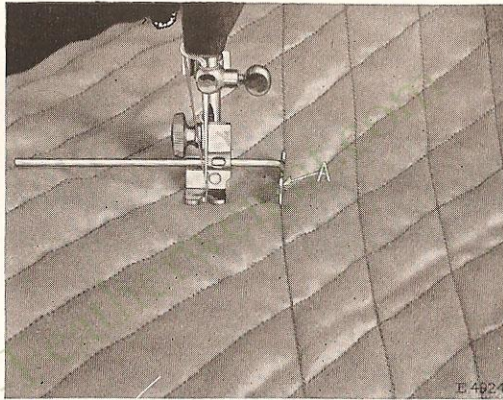


FIG. 156. THE QUILTER IN OPERATION

The name Quilter should not be understood to indicate that this foot is used only for quilting as it may be put to many other uses. When applying rows of ornamental stitching on a garment the Quilter is of great assistance. See Chapter 8, page 130.