

For **shirred cording**, place the two pieces of fabric back to back and make one line of stitching. Insert the cord between the fabric next to the line of stitching and stitch close to the cord, being careful that the stitching does not penetrate the cord. Continue cording until the desired number of cords have been inserted, then pull the cords and shirr as full as desired, after which stitch across the cord ends to keep the shirring in place. Fig. 200 shows a sample of work done with this special presser foot.

### ADJUSTABLE CORDING AND ZIPPER FOOT 121877

The Adjustable Cording and Zipper Foot 121877, shown in Fig. 201, is especially designed for stitching on zipper tapes and other edgings.

This foot has a notch in both sides of the toe and may also be used as either a right or left cording foot by loosening thumb screw (A, Fig. 201) and moving toe (C), to the right or left, as required.

The Cording and Zipper Foot is fastened to the presser bar in the same manner as the regular presser foot, having either the left or right notch of the toe, whichever is to be used, in line with the needle hole in the throat plate.

When using the Cording and Zipper Foot as a **corder**, follow the instructions on page 128 for the use of the Right and Left Corders.

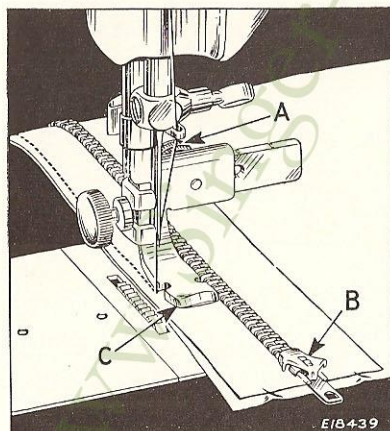


FIG. 201. SEWING ON ZIPPER  
(FIRST OPERATION)

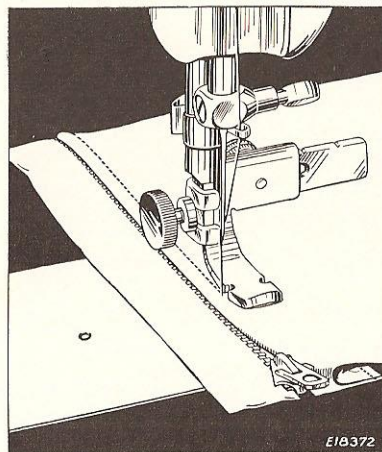


FIG. 202. SEWING ON ZIPPER  
(SECOND OPERATION)