


# BMF Heel Lock replacement



Tools needed: 2x T20 torx drivers, RED Loctite

- 1 Open Beer (if applicable)
- 2 The binding can stay on the ski
- 3 Using two T20 torx drivers (one on each side), loosen one of the M4 SCREWS on the REAR SHAFT. This shaft has Loctite, so it may be difficult to break the screws free
- 4 Only one of the two screws will loosen. Remove it and push out the REAR SHAFT from the heel bracket
- 5 Take out the old HEEL LOCK and replace with the new one, noting the alignment relative to the HEEL LEVER and the SPRING LOOP
- 6 Insert the REAR SHAFT into the Heel Bracket, sliding it through the HEEL LOCK and SPRING LOOP
- 7 Apply a small amount of RED Loctite to the M4 screw and tighten into the rear shaft Hand tighten using two T20 Torx drivers.
- 8 Repeat if needed and you're done! Finish your beer, recycle the can/bottle, high five yourself, and go shred!

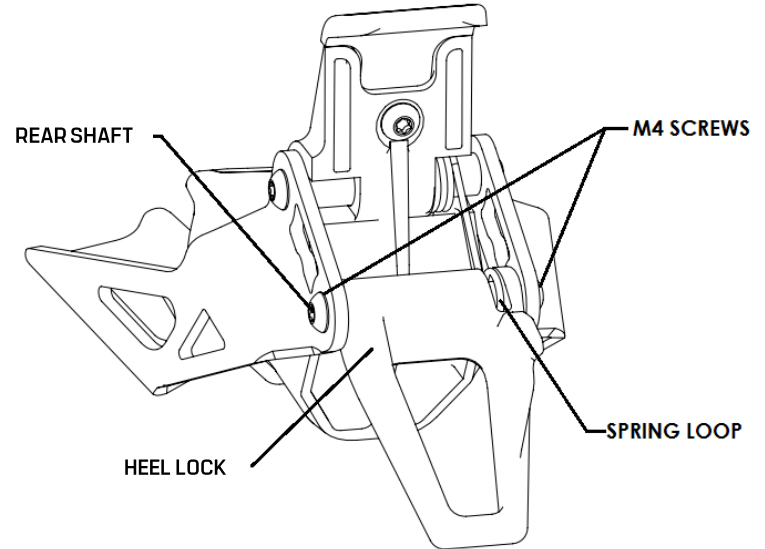

Questions? Email us at [info@bishopshreds.com](mailto:info@bishopshreds.com) or call us at 970-306-6123. THANK YOU for choosing BISHOP!