


**Anti-Roll Bar and End Link Combination Mounting Guide**

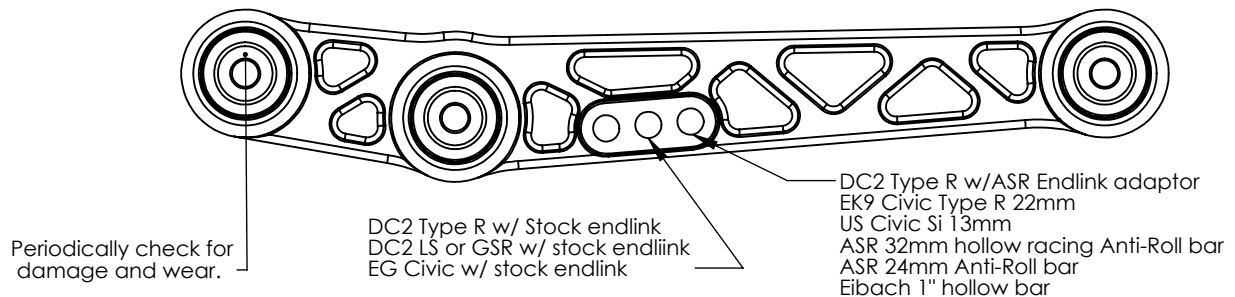

**TIP:**  
 Once the arm is bolted to the vehicle, install the endlink to the lower control arm before attaching to the swaybar arm.

ASR control arm utilizes an M10 X 1.25 threaded hole for the lower portion of the end link attachment. Be sure to inspect and clean the bolt or stud that will be used to avoid thread damage.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	EG-RLA	Rear Lower Arm	2
2	RLA Bushing	PU Bushing	12
3	Pin RLA Long	Bushing Pin (25mm)	12

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **A-Spec Racing**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **A-Spec Racing** IS PROHIBITED.

**A-Spec Racing Co.**, Chasworth CA  
 www.asrparts.com

MADE IN USA

SIZE <b>A</b>	EG-RLA	SHEET 1 OF 1
------------------	--------	--------------