



DRV 724 • DRV 725
Type A (DN 15 - DN 32)



DRV 724 • DRV 725
Type B (DN 40 - DN 80)



Media

The pressure reducers are suitable for use with aggressive waters and other aggressive liquids, but can also be used for air and neutral gases when larger flow rates are required.

Pressure reducing valve
Female thread • High pressure
Stainless steel

Pressure reducing valves of the series are piston-controlled, spring-loaded pressure reducing valves. These valves are inlet pressure relieved.

DGRL 2014/68/EU **CE**

Classification societies

- DNV GL
- LR
- BV
- ABS
- CCS

Customs tariff number

84811005



Features

- pressure-relieved single seated valve
- piston-controlled
- continuously adjustable outlet pressure
- max. inlet pressure up to 40 bar
- outlet pressure : 1,5 - 20 bar
- female thread acc. ISO 228, optionally with NPT-Gewinde
- with integrated strainer filter
- replaceable inner parts
- double-ended G 1/4" manometer fitting (for outlet pressure)
- assembly position: any desired, preferably vertical
- minimum pressure difference (inlet/outlet pressure): 1 bar
- EPDM seals with FDA conformity

Pressures



max. 40 bar



1,5 - 20 bar

Connections



Female thread
acc. ISO 228
from G 1/2" up to G 2"

Materials

	body	spring bonnet	seals	wetted parts	max. temperature
standard version	stainless steel 1.4408	stainless steel 1.4408	FKM optionally EPDM*, NBR	stainless steel 1.4404	190 °C**



Temperatures

Various options in the area of seals and wetted internal parts allow a maximum temperature of up to 190°C.



from -30 °C up to +190 °C

Seals and temperatures

NBR	-15°C to +100°C
EPDM*	-30°C to +130°C
FKM	-10°C to +190°C

*with FDA conformity, only DN 40 & DN 50
** with FKM seals



Technical data

nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Type

A

B

Pressures

max. inlet pressure [bar]

max. 40 bar



DRV 724	40	40
DRV 725	40	40

outlet pressure [bar]

1,5 - 10 bar



DRV 724	1,5 - 12	1,5 - 12
DRV 725	2,0 - 20	2,0 - 20

Connections

dimensions [mm]

Female thread
from G 1/2" to G 2"




	G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
all types	b	95	95	110	120	150	160
	h1	29	29	38	38	38	38
	h	133	133	133	133	243	243

weight [kg]

DRV 724	1,7	1,6	2,5	2,5	6,8	6,6
DRV 725	1,7	1,7	2,6	2,5	6,8	6,7

kvs-value [m³/h]

all types	2,9	3,9	5,4	6,1	9	13
-----------	-----	-----	-----	-----	---	----

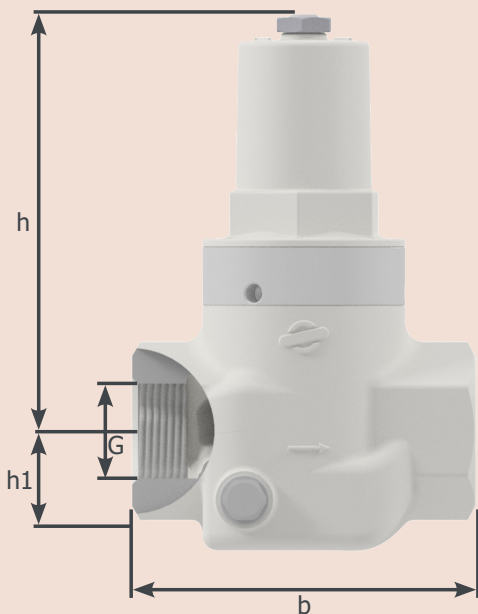



Article number

nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
standard version						
DRV 724	072402	072403	072404	072405	072406	072407
DRV 725	072502	072503	072504	072505	072506	072507

Standard article numbers are 6 digits, article numbers for additional options are 11 digits. (See next page for an overview of options)

Manometer

diameter	connection	body	pressure range	max. temp.	art.no.
50 mm	G 1/4", central back	steel	0 - 10 bar	60°C	009002
63 mm	G 1/4", central back	steel	0 - 25 bar	60°C	009004
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	200°C	009014
63 mm	G 1/4", central back	stainless steel	0 - 16 bar	200°C	009016



Options

C C - connections			E - elastomers		
00 -	ISO 228	standard	0 -	FKM	standard
30 -	NPT - ASME B1.20.1		1 -	NBR	
			2 -	EPDM	only DN 40 & DN 50
M - material wetted parts			F - finishes		
0 -	stainless steel 1.4404	standard	0 -	without additional finishes	

Configuration example of an article number with additional options

inlet pressure: 25 bar
seals: EPDM

outlet pressure: 14 bar
temperature: 30 °C

connection: 2" NPT
without additional finishes

art.no. standard version						-	C	C	M	E	F
0	7	2	5	0	7	-	3	0	0	2	0

Flow diagram

