



DRV 772 • DRV 778
Type A (DN 15 - DN 32)



DRV 772 • DRV 778
Type B (DN 40 - DN 80)



Media

The pressure reducers are suitable for use with aggressive waters and other aggressive liquids, but can also be used for air and neutral gases when larger flow rates are required.

FDA / EC 1935/2004

Our stainless steel series with EPDM seals correspond to the requirements of the EU Regulation EC 1935/2004 and the Regulations of the FDA (Food and Drug Administration).

The metallic components in contact with the medium are made of austenitic materials such as 1.4408 and 1.4404.

The EPDM seals are conform FDA (21 CFR part 177.2600) and EC 1935/2004. This means you can use our stainless steel series with EPDM seals in food applications without hesitation.

**Pressure reducing valve
Female thread • Wide range
Stainless steel**

Pressure reducing valves of the series are diaphragm-controlled, spring-loaded pressure reducing valves. These valves are inlet pressure relieved.

DGRL 2014/68/EU **CE**

Classification societies

- DNV GL
- LR
- BV
- ABS
- CCS

Customs tariff number

84811005



Features

- pressure-relieved single seated valve
- diaphragm-controlled
- continuously adjustable outlet pressure
- max. inlet pressure up to 40 bar
- outlet pressure : 0,5 - 9 bar
- female thread acc. ISO 228, optionally with NPT-Gewinde
- with integrated strainer filter
- replaceable inner parts
- double-ended G 1/4" manometer fitting (for outlet pressure)
- assembly position: any desired, preferably vertical
- minimum pressure difference (inlet/outlet pressure): 1 bar
- EPDM seals with FDA conformity

Pressures



max. 40 bar



0,5 - 9 bar

Connections



Female thread
acc. ISO 228
from G 1/2" up to G 2"

Materials

	body	spring bonnet	seals	wetted parts	max. temperature
standard version	stainless steel 1.4408	stainless steel 1.4408	FKM optionally EPDM*, NBR	stainless steel 1.4404	190 °C**



Temperatures

Various options in the area of seals and wetted internal parts allow a maximum temperature of up to 190°C.



from -30 °C up to +190 °C

Seals and temperatures

NBR	-15°C to +100°C
EPDM*	-30°C to +130°C
FKM	-10°C to +190°C

* with FDA conformity
** with FKM seals




Technical data

nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"

Type		A	B					
Pressures								
	max. inlet pressure [bar]							
max. 40 bar		DRV 772	40					
		DRV 778	40					
0,5 - 9 bar		DRV 772	0,5 - 4					
		DRV 778	0,5 - 9					
Connections								
	Female thread from G 1/2" to G 2"							
	all types	dimensions [mm]						
		G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
		b	95	95	110	120	150	160
		h1	29	29	38	38	38	38
		h	116	116	116	116	219	219

	weight [kg]					
DRV 702	1,4	1,3	2,1	2,0	5,3	5,1
DRV 708	1,4	1,3	2,1	2,0	5,4	5,3
	kvs-value [m³/h]					
all types	2,9	3,9	5,4	6,1	9	13

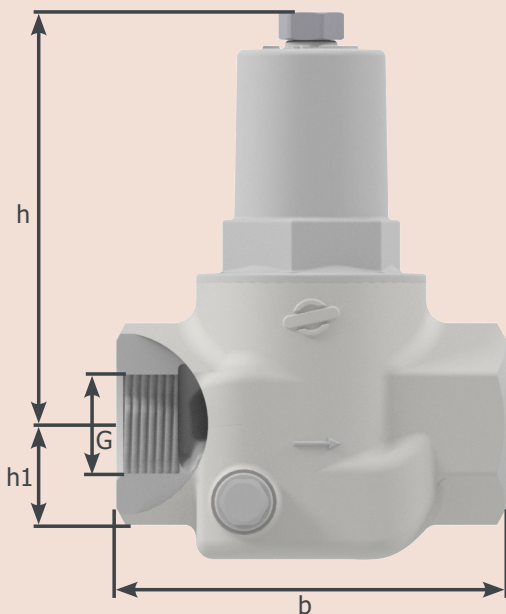



Article number

nominal size	15	20	25	32	40	50
G	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
standard version						
DRV 772	077202	077203	077204	077205	077206	077207
DRV 778	077802	077803	077804	077805	077806	077807

Standard article numbers are 6 digits, article numbers for additional options are 11 digits. (See next page for an overview of options)

Manometer

diameter	connection	body	pressure range	max. temp.	art.no.
50 mm	G 1/4", central back	steel	0 - 4 bar	60°C	009001
50 mm	G 1/4", central back	steel	0 - 10 bar	60°C	009002
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	60°C	009015
63 mm	G 1/4", central back	stainless steel	0 - 10 bar	200°C	009014



Options

C C - conenctions

- 00 - ISO 228 standard
- 30 - NPT - ASME B1.20.1

M - material wetted parts

- 0 - stainless steel 1.4404 standard

E - elastomers

- 0 - FKM standard
- 1 - NBR
- 8 - EPDM with FDA conformity

F - finishes

- 0 - without additional finishes

Configuration example of an article number with additional options

inlet pressure: 10 bar
seals: EPDM

outlet pressure: 4 bar
temperature: 30 °C

connection: 2" NPT
without additional finishes

art.no. standard version						-	C	C	M	E	F
0	7	7	8	0	7	-	3	0	0	8	0

Flow diagram

