

D1xB2X10 Explosion Proof Xenon Strobe Beacon 10J

The D1xB2X10 is a globally approved explosion proof 10 Joule Xenon beacon. The robust Type 4/4X corrosion proof LM6 marine grade aluminium alloy enclosure ensures suitability for all Class I/II Div 1, Zone 1, 2, 21 & 22 applications.

Approved to UL1638 and CAN/ULC S526 for fire alarm use the D1xB2X10 beacons produce a high output Xenon flash for effective visual signalling. The field replaceable colour filter enhances the strobe and is constructed from UV stable PC. The robust enclosure features a threaded flame path and multiple cable entries. Mounting options include surface via integrated lugs, pendant or multi directional by addition of the optional stainless steel bracket. SIL1 & SIL2 compliant to IEC61508 (2010) as standard, with optional diagnostic module for Route 1H SIL2 compliance.

Features

- Four flash rates: 1Hz, 1.3Hz, 1.5Hz & double flash
- Automatic synchronisation on multi-beacon system
- A4 316 Stainless Steel guard included as standard
- UV stable polycarbonate lens colour filter – field replaceable
- 4 x side, 1 x pendant cable entries – stopping plugs included
- Corrosion proof marine grade aluminium enclosure
- UL 1638 & CAN/ULC S526 signaling device for Fire Alarm

Approvals

- UL/cUL/ULC – File ref: E245313
- IECEx Certificate: IECEx ULD 19.0006X
- ATEX Certificate: DEMKO 19 ATEX 2009X
- UKCA certificate: UL21UKEX2130X
- TR CU Ex EAC certificate: EAC RU C-GB.AA.71.B.00273/20
- PESO CCOE certified: P493433-1
- CSFM listing: 7300-2279:0508
- CCCEx certificate: 2022122309114969
- SIL1 & SIL2 compliant to IEC61508 (2010)

Coding

- NEC Class / Zone
 Class I Zone 1 AEx db IIC T4 Ta -55°C to +80°C (AC: +65°C) T5 to +45°C
 Class I Zone 1 AEx db IIC T5 Ta -55°C to +45°C
 Zone 21 AEx tb IIIC T132°C Ta -55°C to +80°C (AC: T153°C +70°C)
- CEC Class / Zone
 Ex db IIC T4 Ta -55°C to +80°C (AC: +65°C) T5 to +45°C
 Ex tb IIIC T132°C Ta -55°C to +80°C (AC: T153°C +70°C)
- NEC / CEC Class / Div
 Class I Div 1 Group ABCD T4 Ta -55°C to +80°C (AC: +70°C)
 Class I Div 1 Group ABCD T4A Ta -55°C to +70°C (AC: +55°C)
 Class I Div 1 Group ABCD T5 Ta -55°C to +50°C
 Class II Div 1 Group EFG T4 Ta -55°C to +80°C (AC: +40°C)
 Class II Div 1 Group EFG T4A Ta -55°C to +65°C / T5 to +45°C
 Class III Div 1 Ta -55°C to +80°C (AC: +40°C)
- IECEx / ATEX
 II 2G Ex db IIC T4 Gb Ta -55°C to +80°C (AC: +65°C) T5 to +45°C
 II 2D Ex tb IIIC T135°C Db Ta -55°C to +80°C (AC: T139°C +70°C)



Specification

Source:	Xenon Strobe
Energy:	10 Joules (10Ws)
Flash rates:	1Hz flash (60 fpm) 1.3Hz flash (80 fpm) 1.5Hz flash (90 fpm) Double flash (120 fpm)
Eff. Intensity cd:	69.81cd UL 1638 Private mode fire
Eff. Intensity cd:	645.21cd measured ref to I.E.S
Eff. Intensity cd:	500 cd – calculated from energy (J)
Peak Candela:	1,000,000 cd – calculated from energy (J)
Lens colours:	Amber, Blue, Clear, Green, Magenta, Red & Yellow
Voltage DC:	24V dc (20-28Vdc), 48Vdc (42-54Vdc)
Voltage AC:	115Vac (110-120Vac), 230Vac (220-240Vac)
In-rush:	813mA within 6ms @ 24Vdc
Safety Integrity Level:	Product version A: SIL1 and SIL2 Route 2H Product version S: SIL2 Route 1H with diagnostics SFF: >99% See install manual for reliability & functional safety data
Ingress protection:	IP rating per EN60529:IP66/67 Type rating per UL50E/NEMA250:4/4X/3R/13
Lens material:	High impact Borosilicate glass
Enclosure material:	Marine grade LM6 aluminium alloy
Enclosure color:	Red or Grey, custom colours available on request
Enclosure finish:	Chromate & powder coated finish
Cable entries:	Side: 2 × 3/4"NPT & 2 x M20x1.5mm Pendant: 1 × 3/4"NPT Stopping plugs included
Stopping plugs:	Brass, Nickel Plated or Stainless Steel
Terminals:	0.5 – 2.5mm ² (20-14AWG) – 12AWG solid core conductor Duplicated terminals
Line monitoring:	Blocking diode included EOL Min. 500 Ohm 2W, or 3k3 Ohm 0.5W resistor or diode (DC versions) can be fitted
Ground/Earth stud:	M5
Enclosure volume:	<2 litres
Installation temp:	-55 to +80°C [-67° to +176°F]
Storage temp:	-55 to +80°C [-67° to +176°F]
Relative humidity:	99% – tropicalised/conformal coated electronics
MTBF DC:	198.88 years / 1,742,161 hours – MIL 217
MTBF AC:	253.68 years / 2,222,223 hours – MIL 217
Weight:	3.2kg/7.1lbs

*All candela data is representative of performance with clear lens at optimum voltage.

Part Codes

Part Code:	Identifier:	Description:
Product type:	D1xB2	
Type:	X10	Xenon Strobe Beacon 10 Joule
Voltage:	DC024	24Vdc (20-28Vdc)
	DC048	48Vdc (42-54Vdc)
	AC115	115Vac (110-120Vac)
	AC230	230Vac (220-240Vac)
Cable entries: [e]	M	2 × 3/4"NPT, 2 x M20, 1 × 3/4"NPT
	B	2 × 1/2"NPT – adaptors, 2 × 3/4"NPT, 1 × 3/4"NPT
	E	1 × 1/2"NPT – adaptors, 1 x M20, 2 × 3/4"NPT, 1 × 3/4"NPT
Stopping plug/adaptor material: [m]	B	Brass
	N	Nickel plated brass
	S	Stainless steel
Guard material: [s]	1	A4 316 Stainless Steel
	3	A4 316 St/St with Equip. Tag
	5	A4 316 St/St with Equip. Tag and Duty Label
Product version: [v]	A	UL, cUL, ULC, IECEx, ATEX, CCCEx, Ex EAC, PESO, CSFM – SIL1 & SIL2 Route 2H
	S	UL, cUL, ULC, IECEx, ATEX, CCCEx, Ex EAC, PESO, CSFM (24Vdc only) – SIL2 Route 1H with diagnostics SFF: >99%
Product option: [o]	1	Standard product
	X	Custom configuration – contact E2S
Enclosure color: [x]	R	Red
	G	Grey
	S	Special colour – contact E2S
Lens color: [y]	A	Amber
	B	Blue
	C	Clear
	G	Green
	M	Magenta
	R	Red
	Y	Yellow

Accessories:


SP77-0001-A4-R	Multi angle bracket A4 (316) for Red enclosure
SP77-0001-A4-G	Multi angle bracket A4 (316) for Grey enclosure
SP65-0001-A4	Pole Mount Bracket Kit St/St A4 (316)
SP65-0003-A4	Sunshade – St/St A4 (316)

Spares:

SP77-0002	Xenon flash tube assembly
SP77-0015-R	Pack of 2 x Mounting Lugs – Red enclosure
SP77-0015-G	Pack of 2 x Mounting Lugs – Grey enclosure

Current Consumption

Nominal Voltage:	Voltage range:	Nominal current:	Max. current:	In-rush:
24Vdc	20-28Vdc	605mA	710mA	813mA <6ms
48Vdc	42-54Vdc	230mA	250mA	-
115Vac	110-120Vac 50/60Hz	220mA	300mA	-
230Vac	220-240Vac 50/60Hz	130mA	180mA	-

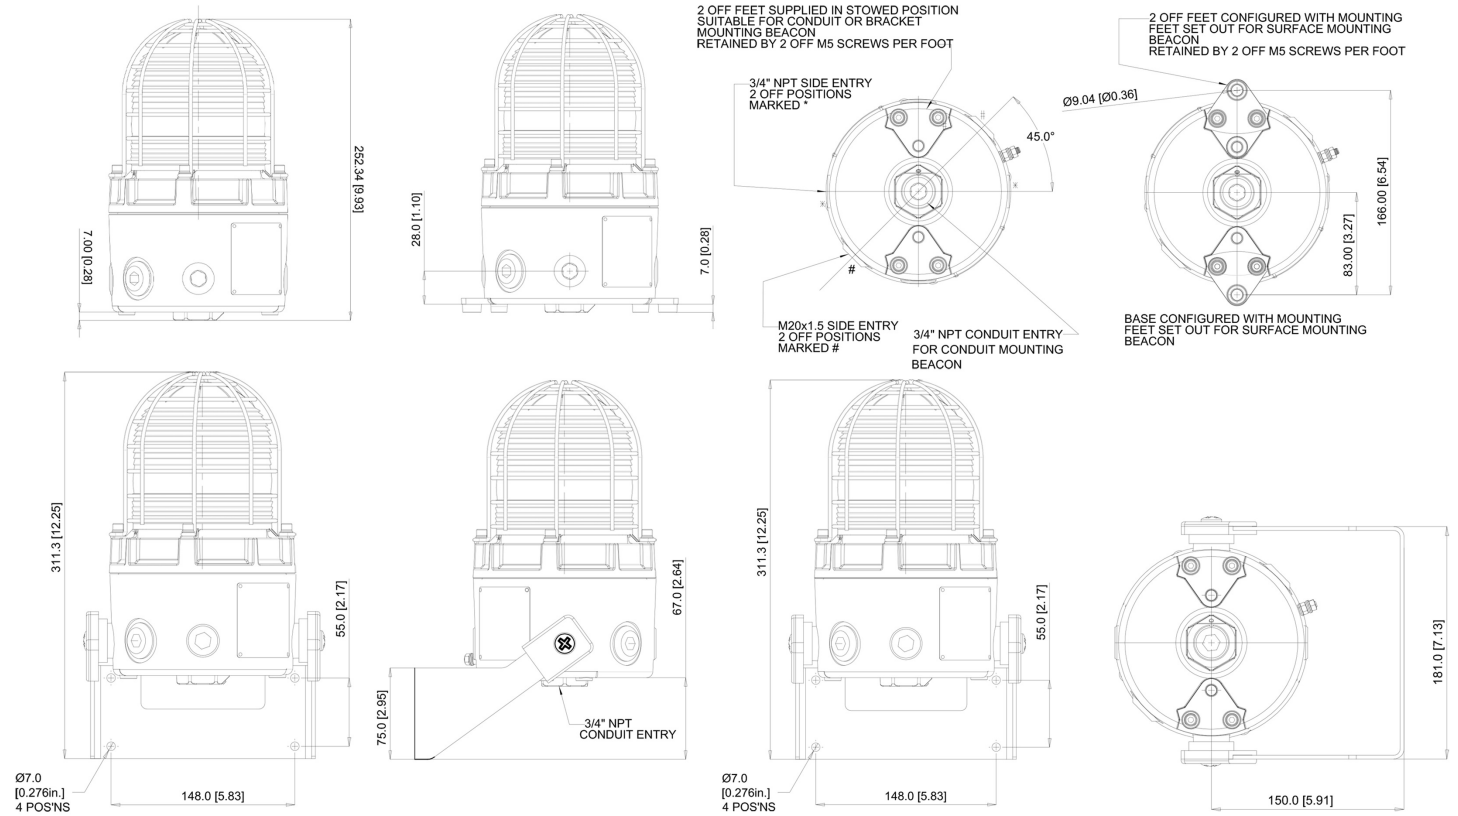

Assemblies

The D1xB2X10 is available as a plated assembly configured with a D1x type alarm horn sounder and additional D1x type Xenon strobe or LED beacons with or without a D1xJ2 Ex d junction box. Contact The SignalSource for further information.



The Signal Source sales@thesignalsource.com www.thesignalsource.com

No liability is accepted for any consequence of the use of this document. The technical specification of this unit is subject to change without notice due to our policy of continual product development. All dimensions are approximate. This unit is sold subject to our standard conditions of sale, a copy of which is available on request.