

▶ Model 350WB

# Vibratone® Horns

Designed for routine signaling uses



The Model 350WB (AC current) Vibratone® horn produces sound by the electro-mechanical vibration of a stainless steel diaphragm. The horn mechanism with diaphragm is attached to the grille. Indoor or outdoor use is made possible by the water- and dust-tight backbox.

Model 350WB features a die-cast aluminum rear housing sealed with a gray enamel finish. The rugged outer housing resists vandalism without reducing sound output. Model 350WB is fused and utilizes a terminal block connection.


Vibratone horns are excellent for general alarm, start/dismissal, coded paging and process control signaling in areas where their sound output exceeds ambient noise levels. Compact size and various installation options make them ideal for institutional use.

## FEATURES

- Available in 120VAC and 240VAC
- User supplied coded or sustained tones
- Wall mount
- Produces 100dBA @ 10' (110dBA @ 1m)
- Type 4X, IP65 enclosure
- UL and cUL Listed, CSA Certified and FM Approved
- Fuse turmoil block provided for field wiring

MODEL	VOLTAGE	OPERATING CURRENT	DECIBELS	
			@ 10'	1 M
<b>350WB-120</b>	120VAC 50/60Hz	0.18 amps	100	110
<b>350WB-240</b>	240VAC 50/60Hz	0.09 amps	100	110

Vibratone® Horns (350WB)

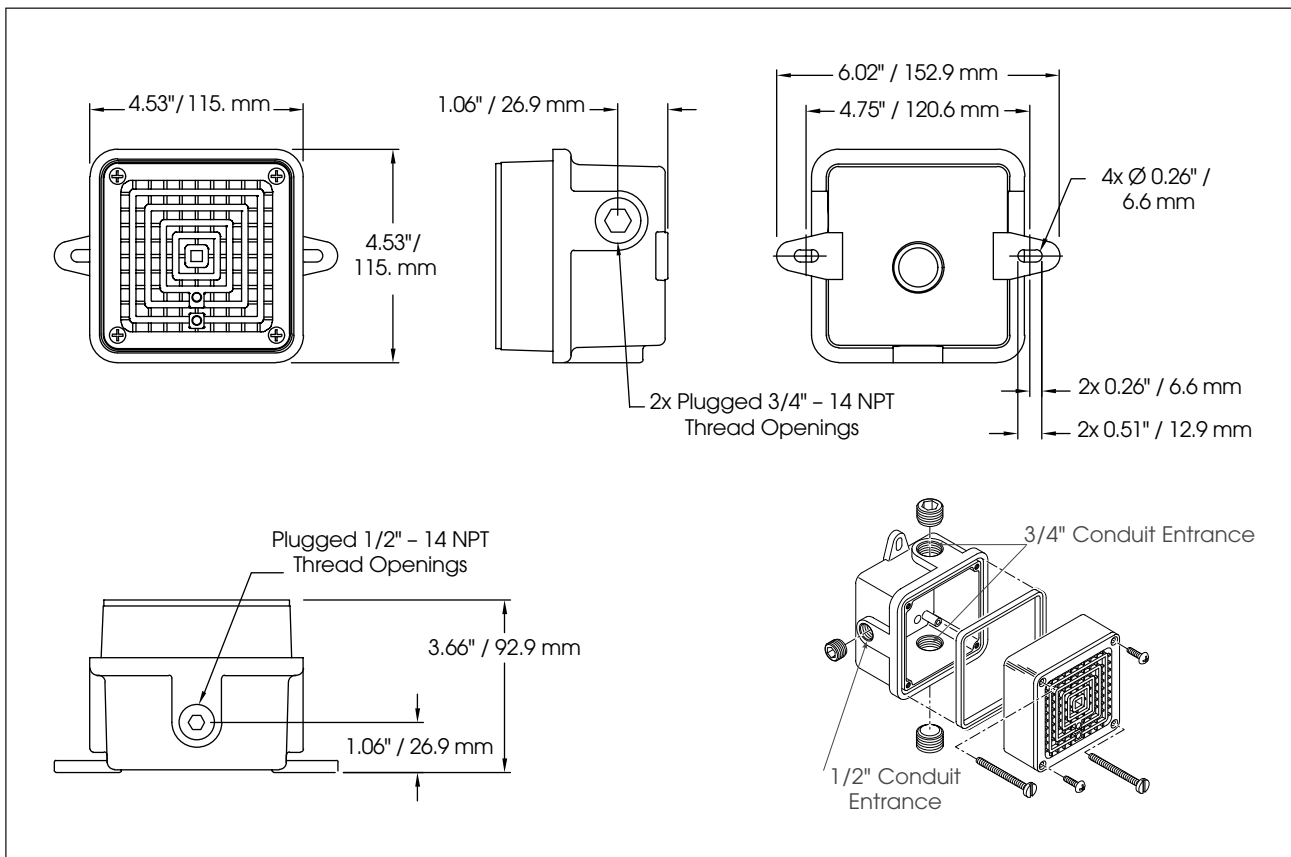

S P E C I F I C A T I O N S

Operating Temperature:	-65°F to 150°F	-54°C to 66°C
Net Weight:	2.7 lbs.	1.2 kg
Shipping Weight:	2.8 lbs.	1.2 kg
Height:	5.3"	134.6 mm
Width:	5.3"	134.6 mm
Depth:	3.66"	92.9 mm

R E P L A C E M E N T P A R T S

Description	Part Number
Volume Control Kit	K8435663B
Coil, 120VAC	KFC1516C
Coil, 240VAC	KFC1506C

H O W T O O R D E R

**350WB** - **120**

<b>TYPE</b> 350WB	<b>VOLTAGE</b> 120 (120VAC) 240 (240VAC)
----------------------	--

- Specify model number and voltage
- Specify Accessories:  
**PR2-NM** – Non-metallic double projector directs sounds to both sides when attached to 350/450E models; ideal for use in hallways; 4" H x 11-1/2" W x 4" D; shipping weight 1 lb. (0.45 kg)



Rev. 021816