





CONSTRUCTION  
PLASTICS

# LARGE TILE LEVELING SYSTEM

Using Tiling Wedges and Spacing Straps.



## STEP 1

Place the spacing straps in between the tiles as you lay them. The foot of the strap is designed to sit under the tile edges immersed in the mortar.

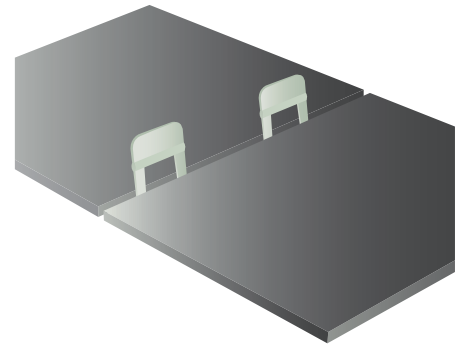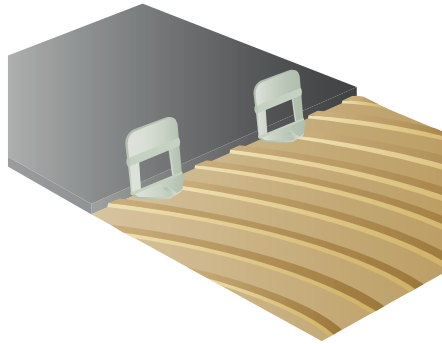



## STEP 2

Once the tiles and spacing straps are in place and the correct spacing has been obtained; slide the wedge through the cut-out in the straps.

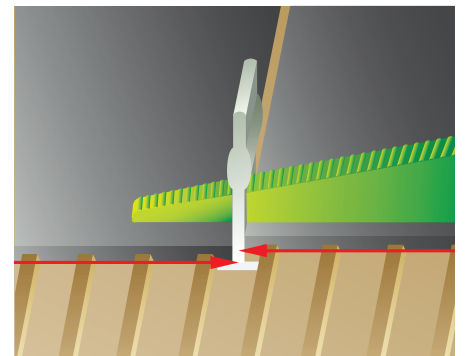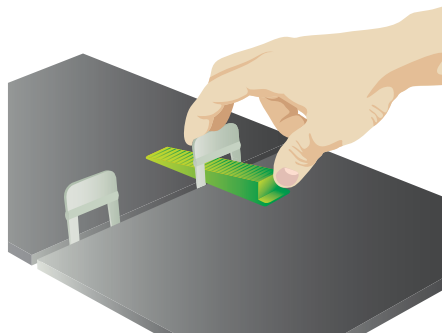



## STEP 3

While the mortar is still wet, (using your hand or a clamping tool) press the wedge firmly through the strap until the two tile surfaces are flush.

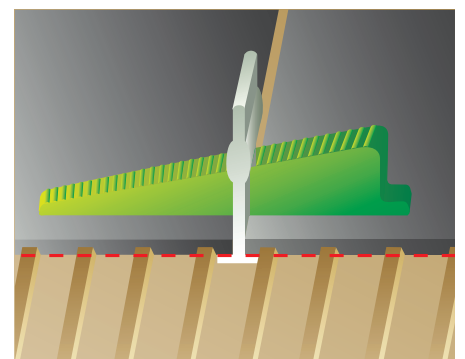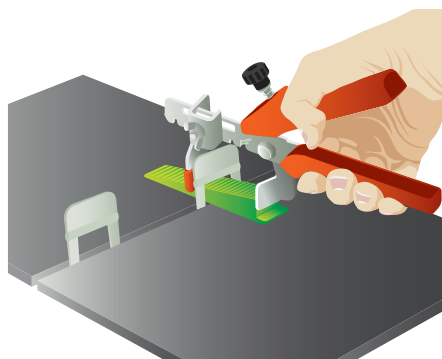

## STEP 4

Once the mortar has dried you can simply break off the upright section of the straps by a kick of your boot or using a mallet. The wedges can be reused.

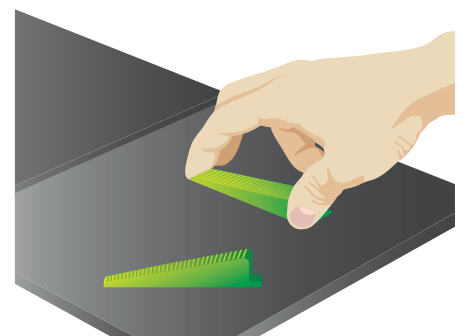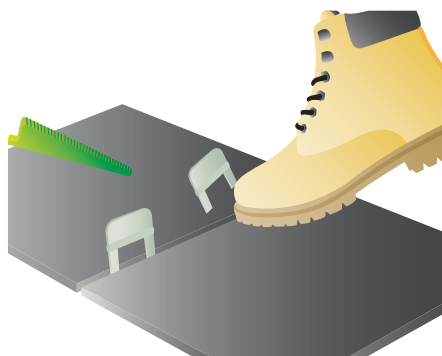

For more information or to order products visit [www.constructionplastics.co.nz](http://www.constructionplastics.co.nz)