



TimberRidge



Multi-Fuel Stove

Model 49-TRCPM

Multi-Fuel: This impressive stove offers you more heating options - it burns corn, cherry pits and wood pellets, making it a flexible, "alternative fuel" burner. This stove also has our unique, multi-fuel AutoStart Igniter, which can light the toughest fuels, including corn.

- User-friendly digital control board
- Decorative inserts for side panels included
- Hopper holds 50 lbs. of pellets (60 lbs. corn)
- Freestanding design makes this a versatile, attractive addition to any room
- Outside air adaptable for safer, cleaner burns
- Outside air kit included: \$65 value



Heats up to
2,200
Square Feet

Burns
Pellets
And More!

One Touch Ignition

Lighting pellets is usually a fairly easy task. Lighting corn, on the other hand, can be a bit more challenging.

For our Multi-Fuel stove, our engineers designed a pump-assisted 'Just press On' ignition system that makes lighting corn seem downright simple. Of course, it performs well with pellets, also.



Proven, U.S.A. Craftsmanship

American made from steel and cast iron, like all of our stoves have been since the beginning. From the welded steel body to the cast door with its Straight-lift handle and Extra-large viewing glass, you can rest assured that the views of your fire will be this dependable for years to come.




P.O. Box 206
Monroe, VA 24574
Sales (800) 641-3066
www.heatredefined.com








Corn Vent Chimney kit for horizontal installations

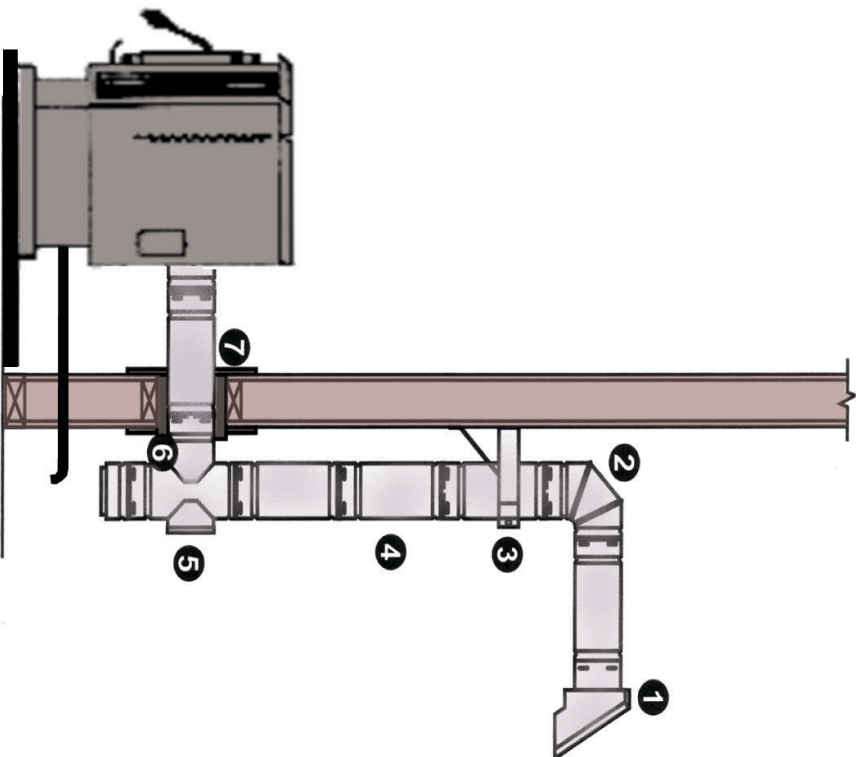Double-wall stainless steel pipe lengths
Features twist-lock connections and hemmed edges for ease of installation

Kit includes parts shown here

For more pipe info., including clearances: www.duravent.com



	Horizontal Cap
	90 Degree Elbow
	Tee Support
	Five 1' Pipe Lengths
	Tee with Clean-Out
	Pipe Adapter
	Wall Thimble

Multi-Fuel Stove

SPECIFICATIONS

Dimensions 27 ⁵/₈" W x 30 ⁵/₈" H x 34 ³/₄" D
Weight 391 lbs.
Heating Capacity Up to 2,200 sq. ft.
Hopper Capacity ... 50 lbs. (pellets); 60 lbs. (corn)
AC-G20 Glass 11 ¹/₂" x 14 ³/₄"
Flue Size 3" rear vent
Height from floor Approx. 18"
Type of Fuel Pellets, Corn, Cherry Pits
Blower 250 cfm, adjustable settings

OPTIONS

AC-109 Brass Lip Trim
AC-109BN Nickel Lip Trim
PU-DTSTAT Wall Thermostat
AC-3001 Remote Thermostat
AC-33000 3" Corn Vent Kit
AC-33100 4" (High Altitude) Kit
(Both kits are from DuraVent)

Inserts for Side Panels are included!

Tested to ASTM E 1509, UL 1482, UL C S627
Testing Agency -
Warnock Hersey International, Inc.
Severna Park, MD 21146
I.C.B.O. #'s NERQA 219/TL 116

Install and use only in accordance with the manufacturers' instructions and all local codes.

For installations of 15 feet or more, or if above 2,500 ft., increase from 3 to 4 inch corn (multi-fuel) vent.
Outside Air hook-up is mandatory (See Manual).
See Owner's Manuals for full installation instructions and for clearances from your unit to combustibles.
Stove Owner's Manual may be found at www.heatredefined.com; pipe info. may be found at www.duravent.com.



Watch
me
burn

DuraVent
Member of M&G Group
UL and UL C Approved

We Recommend
DuraVent Pipe
for our stoves

