



PROJECT : _____
 SALE : _____



Product

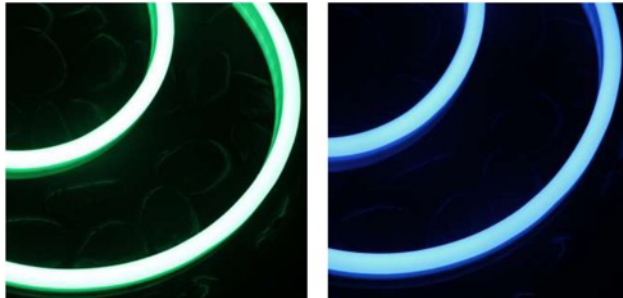

Dimension

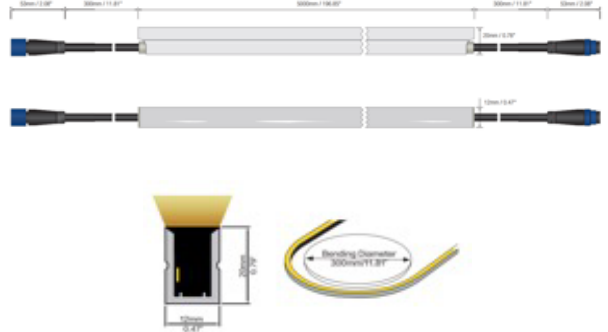

Specification

SERIES : JR-LEDLINE
 ITEM CODE : JR-LEDLINE FLEXSIDE-15W-RGBW-5M
 DESCRIPTION : LEDLINE FLEX SIDE
 SIZE : W12 X L5000 X H20 (MM) / 1 ROLL (5 METERS)
 INSTALLATION : SURFACE MOUNTED WITH PROFILE
 DRILL SIZE : -
 WEIGHT : -
 MATERIAL : SILICONE
 COLOR : WHITE
 REFLECTOR : -
 DIFFUSER : SILICONE RUBBER
 IP RATING : 68



LIGHT SOURCES : LED SMD5050 (84LEDs/M)
 VOLT : 24V DC
 WATTS : 15 W/M (3.75W/COLOR/M)
 LUMEN POWER : 429 LM/M (R 52LM/M, G 155LM/M, B 36LM/M, W 198LM/M)
 CCT : RGB+3000K
 CRI : >90
 BEAM ANGLE : -
 AMBIENT TEMP. : -25°C to +35°C @15W (-25°C to +50°C @3.75W)
 LIFETIME : 30,000 HRS (L80)



CONTROL GEAR : -
 ACCESSORIES : PLEASE READ PAGE2
 REMARKS : THE PRODUCT CAN BE CUT ONCE ONLY AND FINISHED WITH END CAP&GLUE, THEN IP RATING DROPS TO IP67. CAN BE CONNECTED UP TO 16M. PER ONE RUN.

Head office 299/1 (Ekamai) Klongton-Nua, Wattana, Bangkok Thailand 10110

Tel (02) 392 6371-5 FAX (02) 392 1839 Email info@lamptitude.net www.lamptitude.net

PROJECT : _____

SALE : _____

Lampitude

OPTIONAL ACCESSORIES



Aluminium Profile
SPAC-FLEXSIDE-ALU-1M
Dimension: 1000x14.4x21.4mm/
39.37"x0.57"x0.84"(LxWxH)
Material: aluminium
Color: silver



IP68 Connector - RGBW
SPAC-CONNECTOR-RGBW-0.3M
Wire gauge: 1.0mm²/18AWG
Protection: IP68(Mated)
Mechanical operation: > 500
mating cycles
Contact: brass, gold plating
Material of housing: PA



Curved Profile
SPAC-FLEXSIDE-ALU-CURVED
Dimension: 500x26.4x18mm/
19.68"x1.04"x0.71"(LxWxH)
Material: stainless steel
Color: silver



IP68 Extension Connector -
RGBW
SPAC-CONNECTOR-RGBW-5M
Description: IP68 Male and
Female connector with 5M
cable
Wire gauge: 1mm²/18AWG
Material of housing: PA



Mounting Clips
SPAC-FLEXSIDE-CLIP
Dimension: 15x13.8x12.8mm/
0.59"x0.54"x0.5"(LxWxH)
Material: stainless steel
Color: silver
Each meter of LED strip needs
3 clips + 3 screws + 2 end caps

Head office 299/1 (Ekamai) Klongton-Nua, Wattana, Bangkok Thailand 10110

Tel (02) 392 6371-5 FAX (02) 392 1839 Email info@lamptitude.net www.lamptitude.net