



Uniform Plumbing Code Approved

## *Easy installation!*



*Step 1*



*Step 2*



*Step 3*




*Step 4*



*Step 5: DONE!*

# Installation Requirements

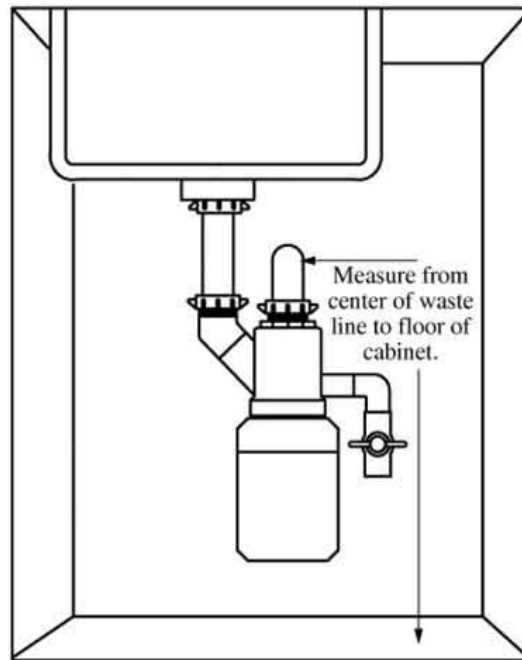

	Height of Unit	Minimum	Recommended
19oz. bottle	12"	13"	14 1/2"
32oz. bottle	13 1/2"	14 1/2"	16"
43oz. bottle	10 1/2"	11 1/2"	13"
64oz. bottle	14 1/2"	15 1/2"	17"
128oz bottle	17"	20"	20"

(when using the 128oz. bottle it is required that you support the unit)

## Maintaining your Gleco Trap



Attention is required when solids reach the fill line.



It is recommended that you apply a small amount of lubricant on the rim of new bottle.



Place the new, empty bottle under the valve and open it.



The water in the upper portion of the trap will drain . . .



... down below the threads on the bottle,



allowing removal of first bottle with no chance of water spillage.



Then twist the bottle with the drained water onto the body of the trap.



By closing the valve and placing lid on full bottle, maintenance is complete.

***Maintenance is accomplished in less than  
2 Minutes***