


## The hose leaks at the handle

If the hose leaks near or in the handle due to wear or a cut, the bad section can be removed.

The water supply need not be shut off for this repair.

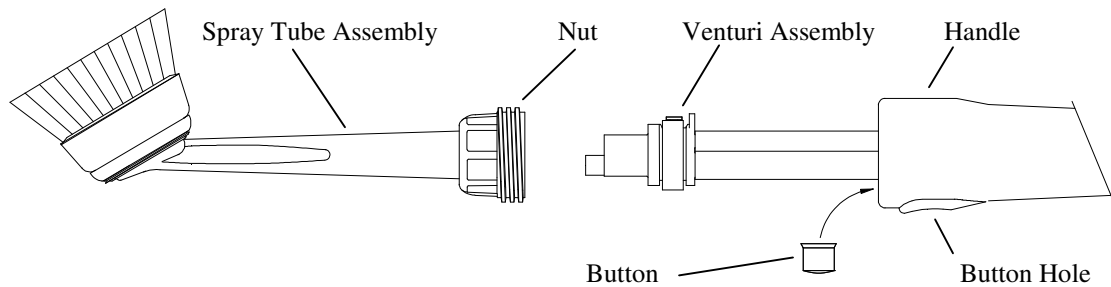

Unscrew nut from handle to remove spray tube assembly. If pliers are required, pad jaws with a cloth to prevent scratches.

Slide handle back along hose and let red button drop out.


Cut hose at point where leak occurs.

Remove hose remnant from venturi assembly.

Slide hose over barbs to shoulder of venturi. It may be helpful to lubricate barbs with small amount of detergent.

Rotate handle and hose so that button hole is down.

Drop button into button hole.

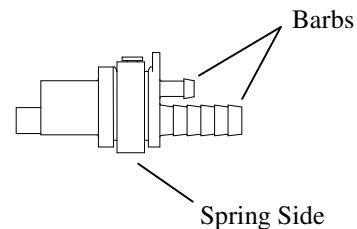

Slide handle over venturi - spring side of venturi MUST be toward button.

Attach spray tube assembly - hand tighten nut.

Adjust direction of spray to desired position by rotating spray tube assembly.

Tighten nut just firmly enough to hold spray tube in desired position. If pliers are required, pad jaws with a cloth to prevent scratches.

This procedure will shorten the overall hose length. If the shorter length is unacceptable, see K0252 or K0254 Hose Assembly. See also K1234 or K1235 Hose & Wand Assembly.