


# UNIVERSAL OVEN BLOCK

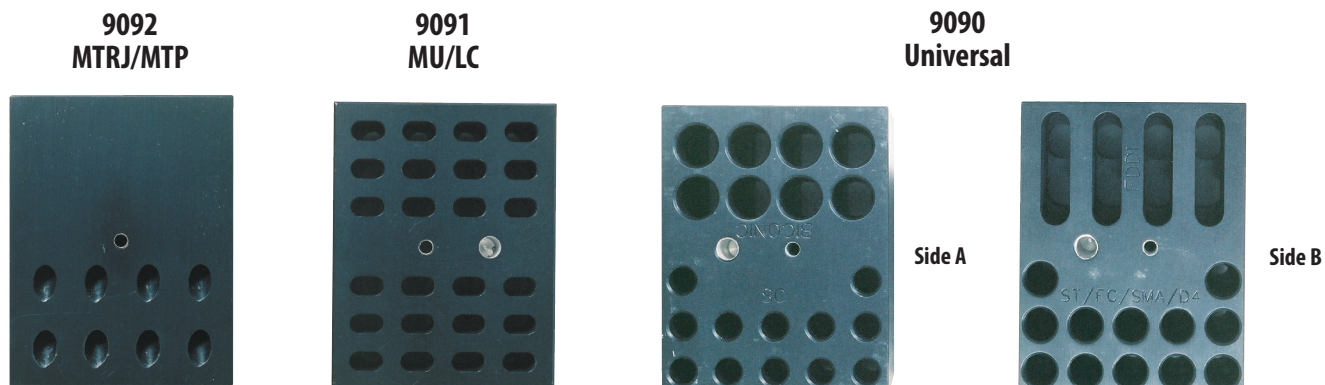

To prevent epoxy "out gassing" that can cause fiber fractures and other connector problems, it is important that a connector curing oven provide reliable operation. This Connector Oven is preferred by many installers because it is simple, dependable, and easy-to-use. Oven sold separately.

## SPECIFICATIONS

<b>Weight</b>	1.5 lbs
<b>Material</b>	Aluminum (Black Anodize)
<b>Side A</b>	12 Ports SC 8 Ports Biconic
<b>Side B</b>	12 ports (ST/FC/SMA/D4) 4 ports FDDI
<b>Dimensions</b>	3 3/4" x 3" x 2"

## ORDERING INFORMATION

<b>9091</b>	24 Ports MU/LC
<b>9092</b>	8 Ports MTRJ/MTP