


# LYNX CLEAVERS


**F1-LYNX**



**F1-LYNX2000**

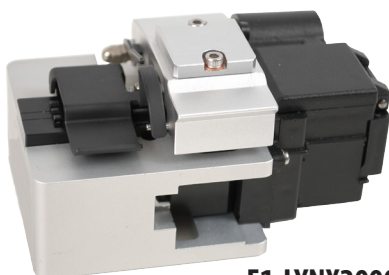

**F1-LYNX3000**

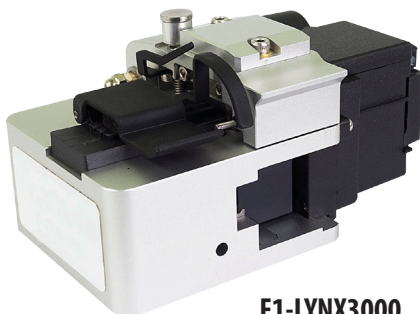

## FEATURES

- Compact, Ergonomic Design
- High Precision Cleaves with 0.5 degree variance
- Cleaves 250um Coated or 900um Buffered fiber
- Field serviceable cleaver blade
- Fiber Disposal Bin Included

## APPLICATIONS

- Fusion Splicing
- Mechanical Splicing
- Splice on Connectors

The Lynx family of cleavers is high precision at a low cost, suitable for any job. Compact and ergonomic, precise and durable, the Lynx family is perfect for all cleaving applications from Splice on Connectors to an emergency fiber restoration.

The standard **LYNX** cleaves 250um and 900um fibers with a 3-step process that will fulfill any cleaving requirement. The Deluxe **LYNX2000** keeps the same performance and quality, but uses an efficient 1-step process to achieve. And the newest addition to the LYNX family is the Premium **LYNX3000**: it keeps all the benefits of the LYNX family with the premium 1-step cleave process but also introduces an auto-rotating cleaver blade for maximum blade life and minimal technician maintenance.

## SPECIFICATIONS

	<b>F1-LYNX</b>	<b>F1-LYNX2000</b>	<b>F1-LYNX3000</b>
<b>Fiber Diameter</b>	125um	125um	125um
<b>Coating Diameter</b>	250um ~ 900um	250um ~ 900um	250um ~ 900um
<b>Cleave Angle</b>	90° ± 0.5°	90° ± 0.5°	90° ± 0.5°
<b>Cleave Length</b>	5 ~ 20mm	5 ~ 20mm	10 ~ 16mm (Universal Holder) Single 10mm (Exchange Holder)
<b>Blade Life Time</b>	48,000 cleaves	48,000 cleaves	75,000 cleaves
<b>Cleaver Dimensions</b>	58 x 55 x 48mm*	88 x 55 x 48mm*	90 x 58 x 50mm*
<b>Weight</b>	360g*	400g*	276g*

\*(without fiber bin attached)