


# InfiniCor® 300 Ribbon

## Description

The Light Connection's ribbon is composed of 2-12 optical fibers ribbonized with an acetate coating. All component materials meet the EU RoHS and REACH Directive standards.

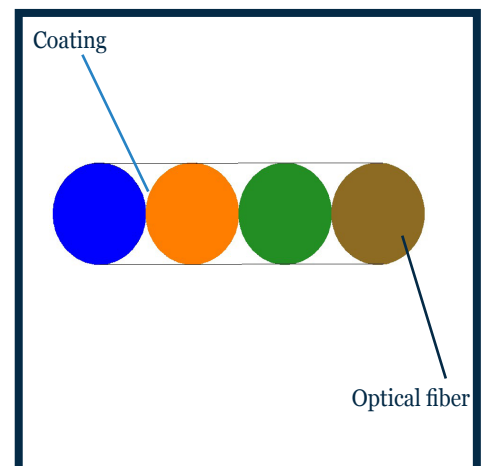

## SPECIFICATIONS

### Temperature Range

Storage Temperature	-40 C to +70 C
Operating Temperature	-20 C to +70 C

### Cable Characteristics

<i>Mechanical</i>		<i>Optical</i>	
Fiber Count	4	Fiber Type	InfiniCor® 300
Strength Member	N/A	Core Size	62.5/125
Overall Jacket Material	N/A	Attenuation(MAX)	3.5dB/km @850nm
Nominal Dimension (mm)	0.33 x 1.2mm	Bandwidth(LED)850/1300nm]	200/500MHz.km
Weight (lbs/km)	3	Numerical Aperture	0.275
Bend radius(cm) Install/Operate	5/3.25	Link Length 1GB/s[850/1300nm]	300mtr/550mtr