
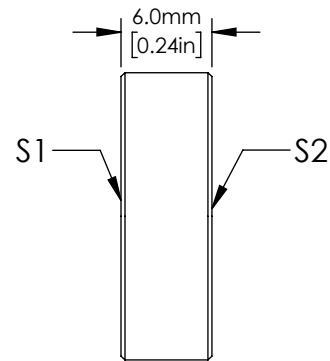
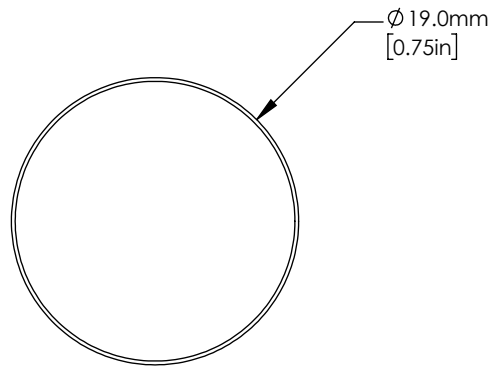




NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: $> \varnothing 17.1$ mm
2. SURFACE QUALITY: 40-20 SCRATCH-DIG
3. SURFACE FLATNESS (S1): $\lambda/10$ AT 633 nm
(S2): FINE GRIND
4. PARALLELISM: < 3 arcmin
5. THICKNESS TOLERANCE: ± 0.2 mm
6. DIAMETER TOLERANCE: $+ 0.0/-0.1$ mm
7. COATING: PROTECTED ALUMINUM
Rag $> 90\%$ FROM 450 nm-2 μ m
Rag $> 95\%$ FROM 2 μ m-20 μ m
AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION				Fiber Optics For Sale Co. www.fo4sale.com	
	NAME	DATE		Ø 19.0 mm ALUMINUM MIRROR	
DRAWN	GG	24/MAR/14			
APPROVAL	BAG	12/AUG/21		MATERIAL	REV
				FUSED SILICA	B
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS				ITEM #	APPROX WEIGHT
				T-PF07-03-G01	4 g