


ULTRASLEEVE® PROTECTION SLEEVE

Reduce fiber splicing installation time and cost with the UltraSleeve® splice cover. Simply load the fused fiber and close the sleeve, no heat shrink curing, or crimping or gluing. The UltraSleeve® features an acrylic foam tape, which seals the sleeve and protects the fiber from damage. The UltraSleeve protector can be closed by hand and is installed after the fusion splice is completed. The UltraSleeve are designed to fit into standard fusion splice trays

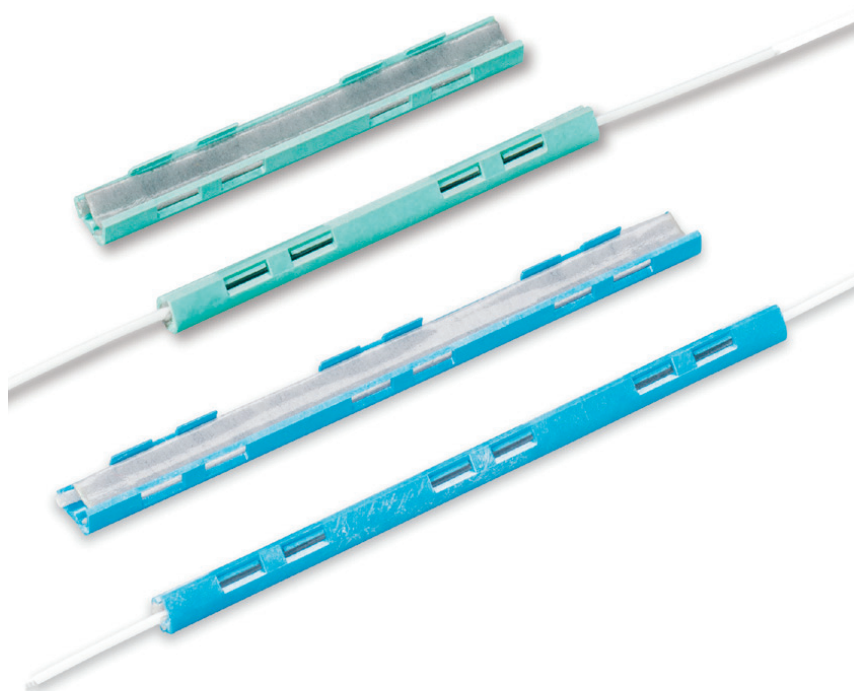

SPECIFICATIONS

NOMINAL DIMENSIONS

Compatible Fiber Size

F1-FS40 - 3mm X 40mm Long

F1-FS60 - 3mm X 60mm Long

125um Bare Fiber

125um w/900um Buffer

Fiber Type

Singlemode or Multimode

Fiber Retention

4.5N (1.0lbf)

Operational Temperature

-40°C to + 75°C

Material

Engineered Thermoplastic UL 94, V-0