
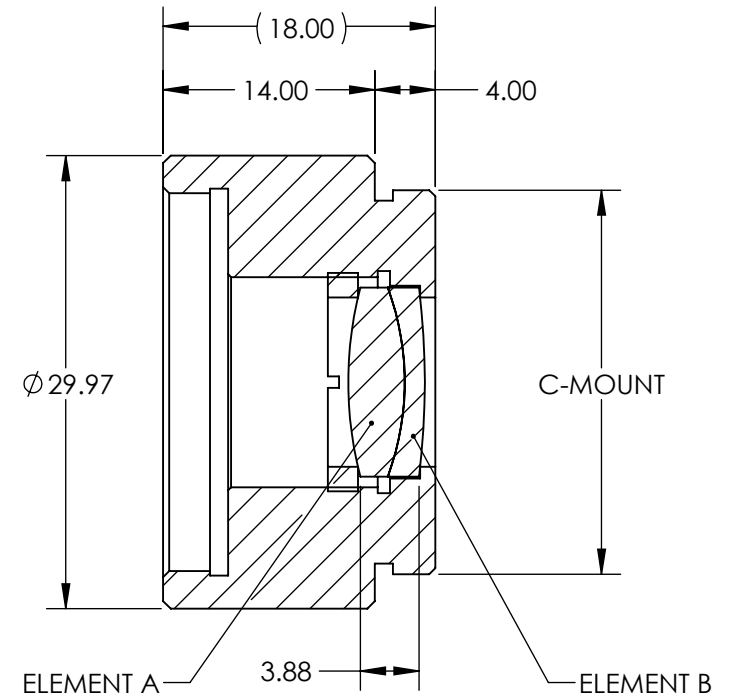


NOTES:

- SUBSTRATE:
ELEMENT A/ ELEMENT B
N-BK7 / N-SF5
- ROHS COMPLIANT
- COATING (APPLY ACROSS COATING APERTURE)
- S1 & S4: MgF2 (400-700nm)
R(AVG) $\leq 1.75\%$ @ 400 - 700nm

S2 & S3: NONE
- FOCAL LENGTH (EFL): 40.00 $\pm 2\%$
FOCAL LENGTH (BFL) FROM MECHANICAL HOUSING: 36.84

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

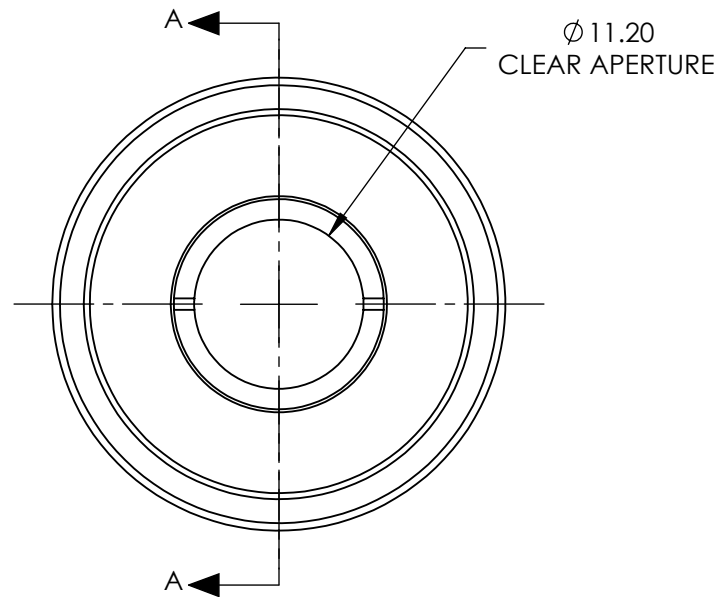


SECTION A-A

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	ELEMENT A		ELEMENT B	
	S1	S2	S3	S4
SHAPE	CONVEX	CONVEX	CONCAVE	CONVEX
RADIUS	24.77	18.01	18.01	51.17
SURFACE QUALITY	40-20	40-20	40-20	40-20
POWER AT 632.8nm	1.5λ	1.5λ	1.5λ	1.5λ
IRREGULARITY AT 632.8nm	λ/4	λ/4	λ/4	λ/4

THIRD ANGLE
PROJECTION



ALL DIMS IN

mm

FOSCO.
FIBER OPTICS FOR SALE CO.

Fiber Optics For Sale Co.
www.fo4sale.com

TITLE

11.2mm CA, 40mm FL, Mounted MgF2
Coated Achromatic Doublet Lens

DWG NO

E-12927

SHEET
1 OF 1