


F	E	D	C	B	A			
FLUID DESCRIPTION	APPLICATION	MODEL	OVERALL LENGTH	O.D.	I.D.	SHIPPING WEIGHT PER CARTON OF 4	CARTON DIMENSION PER CARTON OF 4	FILTERING AREA
FUEL OIL	DIESEL, TURBINE	PL718-12-CN	18"	6 1/4"	2 9/16"	18 POUNDS	13" x 13" x 20"	2707 SQ. IN.
INSULATING PL718-12-CN	TRANSFORMERS, BREAKERS, CABLE	PL718-01-CN	18"	6 1/4"	2 9/16"	16 POUNDS	13" x 13" x 20"	4183 SQ. IN.
		PL718-02-CN	18"	6 1/4"	2 9/16"	16 POUNDS	13" x 13" x 20"	4183 SQ. IN.
CUTTING OIL	CHIP WRINGER, SCREW MACHINES	PL718-03-CN	18"	6 1/4"	2 9/16"	16 POUNDS	13" x 13" x 20"	4183 SQ. IN.
		PL718-05-CN	18"	6 1/4"	2 9/16"	16 POUNDS	13" x 13" x 20"	4183 SQ. IN.
GAS COMPRESSOR	COMPRESSOR LUBE	PL718-10-CN	18"	6 1/4"	2 9/16"	17 POUNDS	13" x 13" x 20"	4676 SQ. IN.
		PL718-20-CN	18"	6 1/4"	2 9/16"	17 POUNDS	13" x 13" x 20"	4676 SQ. IN.
GEAR OIL	GEAR BOX	PL718-16-CN	18"	6 1/4"	2 9/16"	18 POUNDS	13" x 13" x 20"	2707 SQ. IN.

ROLLING OIL PL718-12-CN	FLOOD LUBE FOR ROLLING MILL
HYDRAULIC OIL PL718-12-CN	TRANSMISSION MGF, DIECAST, PLASTIC INJECTION MOLDING TURBINE EHC
LUBE OIL	ENGINE, COMPRESSOR
QUENCH OIL	HEAT TREAT QUENCHING
SILICONE OIL	HEAT TRANSFER

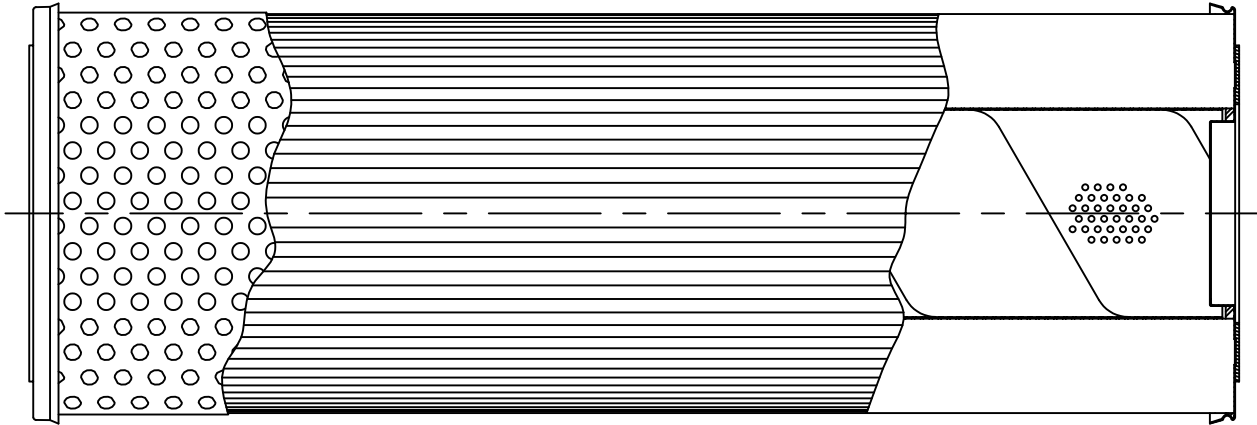

MODEL	BETA RATIO & EFFICIENCY	
	BETA=200 99.5%	BETA=75 98.7%
PL718-12-CN	4 MICRON	3 MICRON
PL718-01-CN	15 MICRON	13 MICRON
PL718-02-CN	18 MICRON	17 MICRON
PL718-03-CN	30 MICRON	28 MICRON
PL718-05-CN	44 MICRON	41 MICRON
PL718-10-CN	52 MICRON	49 MICRON
PL718-20-CN	60 MICRON	57 MICRON
PL718-16-CN	1 MICRON	N/A

THESE CARTRIDGES ARE TO BE USED EXCLUSIVELY IN PRESSURE VESSELS WITH 2" CENTER POST.

- PHYSICAL CHARACTERISTICS:
- 1- CORROSION RESISTANT METAL END CAPS.
 - 2- CELLULOSE GASKETS (STD).
 - 3- TIN PLATE CENTERTUBE.
 - 4- MAXIMUM OPERATING TEMPERATURE IS 250°F.
 - 5- 100 PSI COLLAPSE STRENGTH.
 - 6- ALL CARTRIDGES ARE CONSTRUCTED WITH AN OUTSIDE PERFORATED AMBIENT EXCEPT FOR PL718-12-CN & PL718-01-CN.

REV	DESCRIPTION	BY	DATE	APP
C	REVISED BETA RATIO/MICRON RATINGS	LTH	06/02/09	LTH
B	ADDED PL718-02-CN	LTH	06/07/01	HCR
A	REDRAWN	DPM	05/11/99	GLF

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

DRAWN: GF 02/22/96 CHECKED: GLF 02/22/96 APPROVED: JB 02/22/96 SIMILAR TO: SCALE: FULL	PRODUCTION TITLE: PL718-**-CN MICROGUARD & SAFEGUARD SHEET 1 OF 1 DD-700-30
--	---

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP.
 © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED.