


FLUID DESCRIPTION	APPLICATION	MODEL	OVERALL LENGTH	O. D.	I. D.	SHIPPING WEIGHT PER CARTON OF 4	CARTON DIMENSION PER CARTON OF 4	FILTERING AREA
BEARING LUBE	TURBINE LUBE, MINERAL OIL PHOSPHATE ESTER	PD718-12-CN	18.000"	6.234"	2.563"	18 POUNDS	13" x 13" x 20"	1575 SQ. IN.
		PD718-14-CN	18.000"	6.234"	2.563"	18 POUNDS	13" x 13" x 20"	1575 SQ. IN.
		PD718-01-CN	18.000"	6.234"	2.563"	20 POUNDS	13" x 13" x 20"	2313 SQ. IN.
CIRCUIT BREAKER OIL	UTILITIES, POWER COMPANIES	PD718-03-CN	18.000"	6.234"	2.563"	20 POUNDS	13" x 13" x 20"	2215 SQ. IN.
		PD718-16-CN	18.000"	6.234"	2.563"	18 POUNDS	13" x 13" x 20"	1575 SQ. IN.
HYDRAULIC OIL PD718-12-CN	TRANSMISSION MGF. DIECAST, PLASTIC INJECTION MOLDING TURBINE EHC.							
INSULATING	TRANSFORMERS, BREAKERS, CABLE							
POLYGLYCOLS	COMPRESSOR LUBE HEAT TRANSFER							
POLYOL ESTERS	AREODERIVATIVE TURBINE LUBE							
SILICONE OIL	HEAT TRANSFER							

THESE CARTRIDGES ARE TO BE USED EXCLUSIVELY IN PRESSURE VESSELS WITH 2" CENTERPOST.

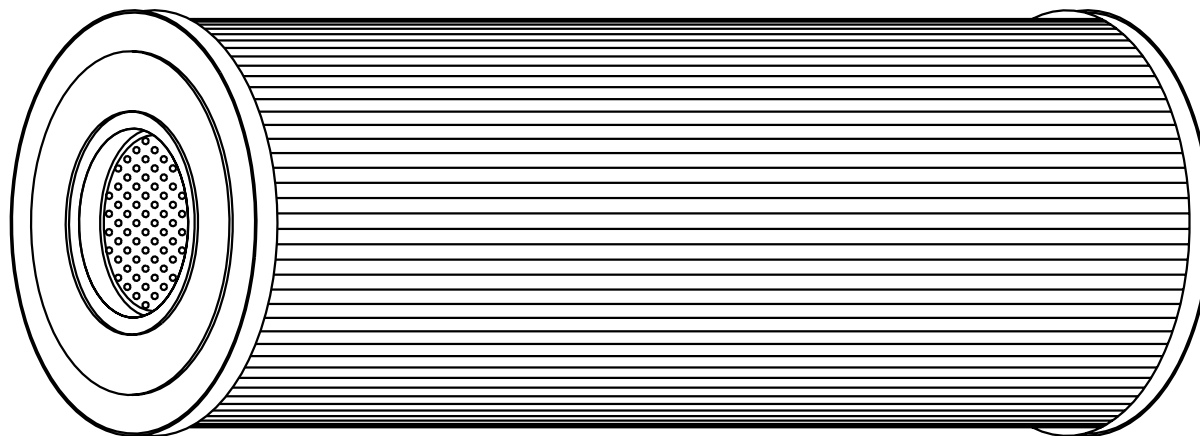

BETA RATIO & EFFICIENCY

MODEL	BETA=200 99.5%	BETA=1000 99.9%	WATER CAPACITY
PD718-12-CN	4 MICRON	6 MICRON	2.1 QUARTS
PD718-14-CN	3 MICRON	5 MICRON	2.1 QUARTS
PD718-01-CN	15 MICRON	19 MICRON	2.6 QUARTS
PD718-03-CN	25 MICRON	27 MICRON	2.7 QUARTS
PD718-16-CN	1 MICRON	3 MICRON	2.1 QUARTS

PHYSICAL CHARACTERISTICS:

1. CORROSION RESISTANT METAL END CAPS
2. CELLULOSE GASKETS. (STD.)
3. TIN PLATE CENTERTUBE.
4. MEDIA REMOVES SOLIDS & TRAP WATER CONTAMINANTS.
5. MAXIMUM OPERATING TEMPERATURE IS 250° F.
6. 100 PSI COLLAPSE STRENGTH.



THE HILLIARD CORPORATION  
100 WEST FOURTH STREET  
ELMIRA, NEW YORK 14902  
TELEPHONE: 607-733-7121  
FAX: 607-737-1108  
WEB SITE: www.hilliardcorp.com

A	REDRAWN	DPW	1/99	GLP
LTR	DESCRIPTION	BY	DATE	APP

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP.  
© COPYRIGHT 1999  
THE HILLIARD CORPORATION, ALL RIGHTS RESERVED

UNLESS OTHERWISE SPECIFIED ✓ <u>1/16</u> MICRONS	
UNLESS OTHERWISE SPECIFIED BREAK CORNERS <u>1/8</u> MAX	
UNLESS OTHERWISE SPECIFIED FRACTIONAL DIMENSIONS - 1/64 DECIMAL DIMENSIONS - .005, .015 ANGLES - 30°	
ALL DIMENSIONS ARE IN INCHES	
ALL DIMENSIONS ARE IN MM	

DRAWN	GP	3/24/95
CHECKED	GLP	3/24/95
APPROVED	JTB	3/25/95
SIMILAR TO:		
SCALE NONE		

REVISIONS	
TITLE	PD718-**-CN PLEATED DRYER CARTRIDGE
SHEET 1 OF 1	DD-700-35