



Vibe™ for schools

**Vibe™ Acoustical Wallcovering**

Vibe™ is a sound-absorbing wallcovering manufactured from thermally bonded polyester fiber with a minimum of 60% recycled fiber content (PET). Vibe™ is designed to be used as a decorative acoustic wall treatment in commercial, public and residential spaces to help reduce noise reverberation.

**Key Benefits and Features**

- Easy to install and wrap around corners and curves
- Can be mounted on plasterboard or plywood
- Compatible with hook and loop fasteners, staples and pins for display boards
- Non-fraying edges ensure tight fitting cut-in designs and logo creations
- Suitable for walls in classroom and office spaces
- Safe, non-toxic and non-irritant
- Not affected by moisture and will neither rot nor deteriorate over time, guaranteeing long-term stability and performance



Hook / loop fastener on Vibe™

**Environmental Benefits**

- Recycled fiber made from discarded PET packaging and drink bottles, reducing landfill waste
- High re-use and recyclable potential
- No chemicals used in manufacturing process
- Contains no phenol formaldehyde resin binders
- Odorless and contains no volatile organic compounds (VOCs)
- No water is used or generated in the manufacturing process
- No ozone-depleting gases are used and no chlorides or ammonia are present in the product
- Suitable for use in Green Star™ projects



Vibe™ on curved wall / column



## Product Specifications

Product Name	Vibe™ Acoustical Wallcovering
Style Number	1101
Composition	60% Recycled Polyester 40% Polyester
Thickness	11 mm (± 2.0 mm)
Weight	1920 grams / linear meter
Width	1.22 meter
Roll Length	25 meters

Vibe™ is available in rolls for installation on smooth wall surfaces.



## VOC Emission

ISO 14184-1 Formaldehyde < 5 ppm

## Flammability

EN 13501-1 B-s1, d0


## Acoustic Performance

Vibe™ is specifically designed to reduce and control reverberated (echo) noise in building interiors, with a minimum NRC of 0.30.

## Noise Reduction Coefficient

ASTM C423-09a NRC 0.30

ASTM C423

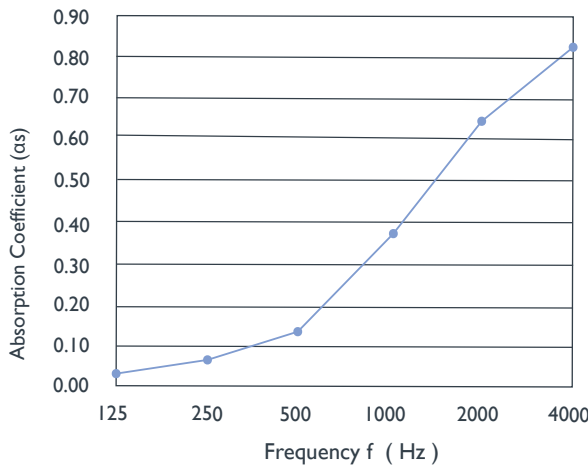

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Vibe™ Acoustical Wallcovering	0.02	0.07	0.13	0.37	0.64	0.82	0.30

## Recycled Products

Vibe™ is manufactured using a minimum of 60% post-consumer recycled materials and is recyclable after use.



## Color Options



## Care and Maintenance

Remove spills immediately using a clean, damp cloth. Use upholstery or carpet cleaner as directed, starting with an inconspicuous area.

## Directional Installation

Prepare smooth wall substrate and affix with contact adhesive or heavy duty construction adhesive. Vibe™ may also be installed using mechanical fixtures similar to glass fittings.

Vibe™ has a directional grain and should be installed in one uniform direction. See Vibe™ Installation Instructions for complete details.

Production lots may vary batch to batch and when compared to samples due to fiber blending, which is an inherent feature of this product.

### For Specifiers:

Acoustic wall treatment shall be Innovasia Vibe™ high density bonded polyester acoustic wallcovering containing not less than 60% recycled polyester fiber, 11 mm thickness, roll length of 25 meters with minimum Noise Reduction Coefficient of 0.30 (ASTM C423-09a). Installation according to Innovasia Acoustics recommended installation instructions.