



Vibe™ & Velour for schools

Vibe™ & Velour Acoustic Wallcovering

Vibe™, with its facing Velour, is a sound-absorbing wallcovering manufactured from thermally bonded polyester fiber with a minimum of 60% recycled fiber content (PET). Vibe™ & Velour are designed to be used as decorative acoustic wall treatments in commercial, public and residential spaces to help reduce noise reverberation.

Key Benefits and Features

- Easy to install and wrap around corners and curves
- Can be mounted on plasterboard or plywood
- Compatible with hook and loop fasteners, staples and pins for display boards
- Non-fraying edges ensure tight fitting cut-in designs and logo creations
- Suitable for walls in classroom and office spaces
- Safe, non-toxic and non-irritant
- Not affected by moisture and will neither rot nor deteriorate over time, guaranteeing long-term stability and performance



Vibe™ & Velour have Velcro® receptive surfaces

Environmental Benefits

- Recycled fiber made from discarded PET packaging and drink bottles, reducing landfill waste
- High re-use and recyclable potential
- No chemicals used in manufacturing process
- Contains no phenol formaldehyde resin binders
- Odorless and contains no volatile organic compounds (VOCs)
- No water is used or generated in the manufacturing process
- No ozone-depleting gases are used and no chlorides or ammonia are present in the product
- Suitable for use in Green Star™ projects



Vibe™ on curved wall / column

Recycled Products

Vibe™ & Velour are manufactured using a minimum of 60% post-consumer recycled materials and are recyclable after use.



Product Specifications

| | |
|--------------|---------------------------------------|
| Style Name | Vibe™ |
| Style Number | 1101 |
| Content | 60% Recycled Polyester, 40% Polyester |
| Thickness | 11 mm (± 2.0 mm) |
| Weight | 1920 g/lm |
| Width | 1.22 m |
| Roll Length | 25 m |

Vibe™ and Velour are available in rolls for installation on smooth wall surfaces.



VOC Emission

ISO 14184-1 Formaldehyde < 5 ppm

Flammability


EN 13501-1 B-s1, d0

Acoustic Performance

Vibe™ is specifically designed to reduce and control reverberated (echo) noise in building interiors, with a minimum NRC of 0.40.

Noise Reduction Coefficient

AS/ISO 354 NRC 0.40

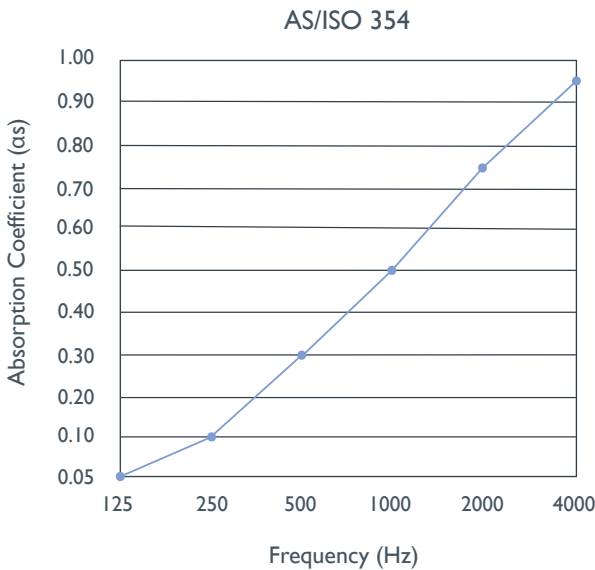

| Frequency (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC |
|----------------|------|------|------|------|------|------|------|
| Vibe™ | 0.05 | 0.10 | 0.30 | 0.50 | 0.75 | 0.95 | 0.40 |

For Specifiers:

Acoustic wall treatment shall be Innovasia Vibe™ high density bonded polyester acoustic wallcovering containing not less than 60% recycled polyester fiber; 11 mm thickness, roll length of 25 meters with minimum Noise Reduction Coefficient of 0.40 (AS/ISO 354). Installation according to Innovasia Acoustics recommended installation instructions.

Product Specifications

| | |
|--------------|---------------------------------------|
| Style Name | Velour |
| Style Number | 1094 |
| Content | 60% Recycled Polyester, 40% Polyester |
| Thickness | 3 mm (± 0.5 mm) |
| Weight | 540 g/lm |
| Width | 1.35 m |
| Roll Length | 50 m |

Color Fastness to Light

ISO 105/B02 > 7

Flammability

AS/ISO 9705 Group I SMOGRA < 100 m²/s²
AS 1530.3 Pass

Color Options



Care and Maintenance

Remove spills immediately using a clean, damp cloth. Use upholstery or carpet cleaner as directed, starting with an inconspicuous area.

Directional Installation

Vibe™ & Velour have a directional grain and should be installed in one uniform direction. See Vibe™ Installation Instructions for complete details.

Production lots may vary batch to batch and when compared to samples due to fiber blending, which is an inherent feature of this product.