


## Installation Guidelines

VenueTile™ must be installed by experienced tradesmen having full knowledge of the product and installation procedures. Innovasia presents this guide in good faith to assist relevant tile installation and accepts no liability for installation actions. The installation guidelines catalogued in this document are recommended by Innovasia Acoustics but the individual tradesman's ability to assess each situation and achieve the desired finished installation is essential.


## Handling and Inspection

Products must be stored in a sealed and moisture proof warehouse. After unpacking and before installation, inspect the product thoroughly for any damage or defects. Do not install unacceptable or questionable quality tiles. Innovasia will not be responsible for removal or replacement costs of unacceptable products.


## Components:

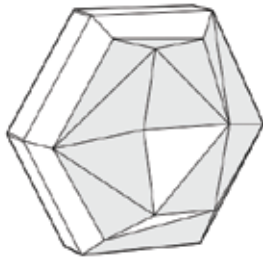

Hex Tile

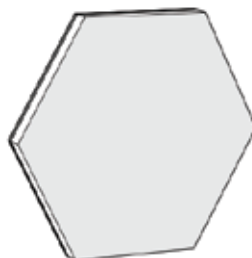


Acoustic Infill

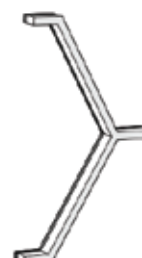

Spacer Jig

## Planning Your Tile Design

The freedom of the HexTile collection is that it allows you to create a unique pattern. Use this blank styling template to colour your design so you can stay on track when installing the tiles.

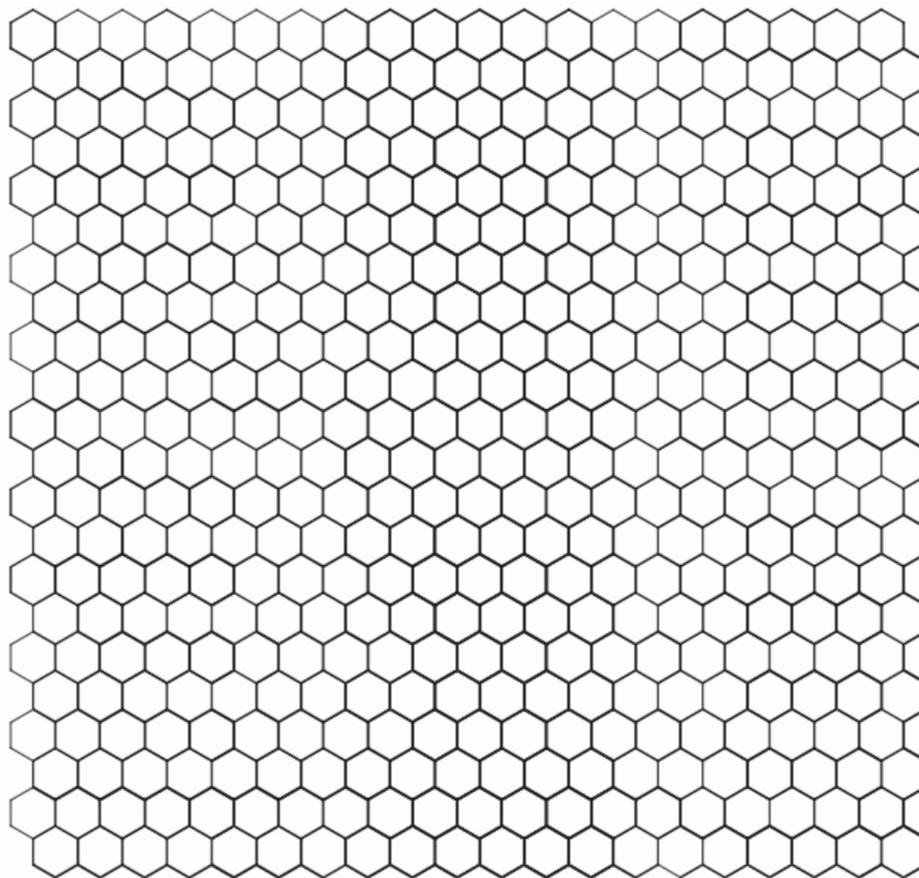


## Installation

Ascertain the wall area to install tiles and ensure the wall area is clean and free of dampness and mold. All dust must be removed by wiping down the wall with a wet cloth and allowing it to dry thoroughly. Follow the installation instructions outlined below.

### Step 1


Mark the area you are placing the first tile. Peel the backing off of the acoustic infill.

**Note: Before applying the acoustic infill in position, ensure you have measured your space. Once applied it is difficult to remove.**




### Step 2

Press the infill on the wall slightly to hold in place ensuring it's aligned to where you want it. Firmly apply pressure to secure to the wall.




### Step 3

Use the spacer jig to measure the position of the next infill.




### Step 4

Peel backing off of the next acoustic infill and apply in the correct position. Once applied, remove the spacer jig to the next location as per your chosen design.

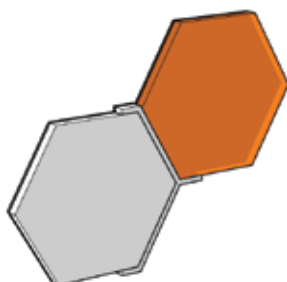


### Step 5

Once applied, remove the spacer jig to the next location as per your chosen design and repeat.

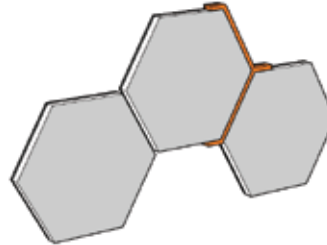


### Step 6

Once all acoustic infills have been applied, friction fit the 3D tiles onto the infills.

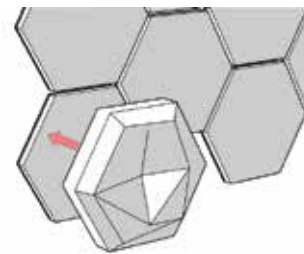

### Step 7

Repeat process to create the desired pattern.

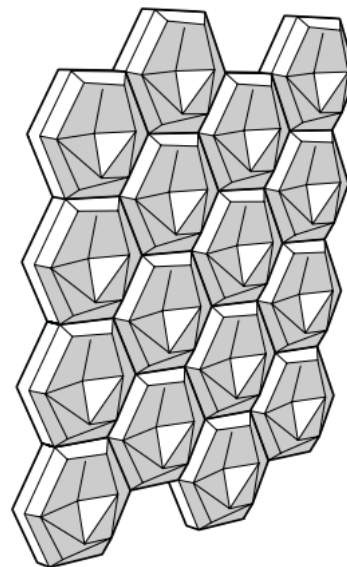

### Tips

- To remove acoustic infill, you will need Citrus Spray.
- Carefully spray the back of the tile against the wall.
- It will slowly start to come off the wall.
- This requires patience and continuous application of spray.
- We always recommend 'measure twice, apply once'.