/SLUMBER ACOUSTICS

COMPOSITION OF THE PANEL

PANEL TECHNICAL DETAILS

MAINTENANCE INSTRUCTIONS

- Aluminium frame with straight or round-angled - Simple system of covers easily removable for cleaning and replacement
- Acoustic absorber
- Cover in 3D fabric (with closing system at the back)

FABRIC

corners

Composition: Woven in a mixture of 31% merino wool, 22% PA, 15% cotton, 13% kid mohair and 1% elastane.

REACTION TO FIRE

Treatment possible

ACOUSTIC PERFORMANCE

Class A acoustic rating - aw 0.90

- Thickness of the panel 60 mm mounted 65 mm
- Sizes and shapes customisable: Irregular, triangle, round sides, L-shape to cover corners
- Power sockets and screens integratable - All fixing systems available (wall, ceiling, suspended, standing)
- 1. General maintenance and preventive measures Mounting: Please use textile gloves to protect the fabric from stains.

Vacuum regularly: We advise regular dusting and vacuum cleaning with a smooth mouthpiece and never with the vacuum bristles showing.

2. Total cleaning of the fabric

For complete cleaning, specialized companies in upholstery cleaning are advisable. The fabric can be easily removed from the panel for this purpose.

DESIGN & COLOURS


The Cello collection contains 1 design and 10 colours.

Colour differences: slight colour differences between yarn batches are characteristic of dying natural materials and consequently can not be valid grounds for complaints.

ENVIRONMENT

Oeko-Tex ® standard 100. All chemicals used are registered under the REACH legislation. The acoustic panels can be easily disassembled and the parts are recyclable.

absorption for Casalis Slumber fabric with mineral wool medium hardnes and 1cm airgap. Kundt tube transfer function method 14/06/2019

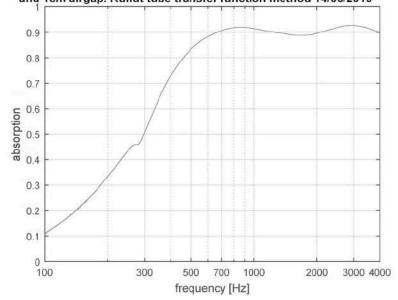

COSOLIS

SLUMBER ACOUSTICS COLOURS

/SHAPES

