



SORA

SINGLE ROD - PENDANT

Designed and Handmade by Oliver Höglund & Ryan Roberts

Molten hot glass shaped and hand-blown at one thousand degrees-celsius. Tiny air bubbles cased with quality clear glass produce a truly unique shadow effect. Made with quality Swedish glass.

The free formation design ensures that no two pieces are the same, giving you a truly aesthetic piece for your space.

Hand-Blown in Currumbin, Australia

GLASS FINISH




Clear



TECHNICAL DATA


| | | | |
|---------------|--|--------------------|---|
| Application | Interior Use Only | Input Power | 100 - 240VAC |
| Glass Colour | Clear | Output Power | 4V DC Driver (350mA Constant Current) Supplied with Remote Driver |
| Rod Finish | Natural Brass / Matte Black / Matte White / Steel Finish / Medium Bronze Powdercoat | Dedicated LED | 1W - 350mA (Standard) / 2W (additional cost) Lifespan - 60,000+ Hours |
| Dimensions | Glass: 120 x 120mm Rod: Standard 1200mm (Optional: Custom length) | Lumen Output | 150lm (1W) (Standard) / 300lm (2W) |
| Ceiling Mount | Ø 110mm | Colour Temperature | 2700K / 3000K (Standard) / 4000K |
| Weight | 1.5kg | Dimming | Single-Use-1W LED Non-Dimmable (Standard) Optional Single-use - 1W LED Dimmable with DALI (additional cost) Please contact for alternative dimming options |
| Warranty | 24 Months / 2 Years | | |
| Certification | CE / AS/NZS - 60598.2.1 | | |

DIMENSIONS

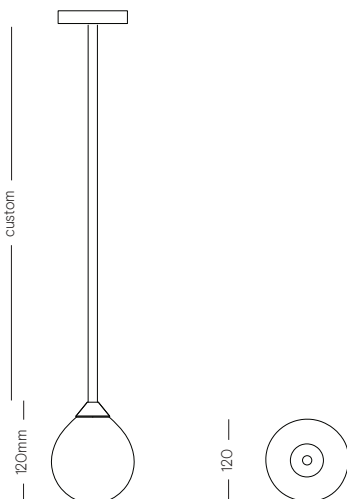


MOUNTING


Installation Instructions



Prep the ceiling with an approx. 50mm hole to fit the transformer. Place the transformer in the ceiling and feed the cable through the hole into the room. Connect the single electrified cable to the transformer.



Screw the steel mounting plate to the ceiling using appropriate fasteners for the ceiling substrate.



Secure the magnetic cover plate onto the mounting plate.

*The transformer needs to be accessible for maintenance purposes.