


Power contactors with handle CX³

from 16 A to 63 A

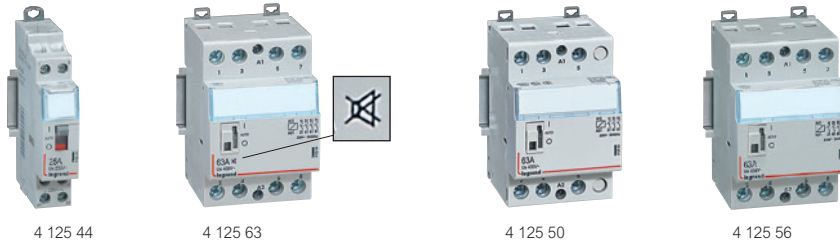

Dimensions **see e-catalogue**
 Technical characteristics **p. 88**

Conform to IEC/EN 61095
 Space for power supply busbar on top (up to 25 A)

Pack	Cat.Nos	Power contactors with 24 V\sim coil and handle			
		Manual override for test and repair function, carried out via the handle Permanent "ON" or "OFF" without automatic reset			
		2-pole - 250 V\sim			
1	4 125 14	I max 25 A		Type of contact 2 N/O	Number of modules 1
1	4 125 15 ¹	40 A		2 N/O	2
1	4 125 16 ¹	63 A		2 N/O	2
		4-pole - 400 V\sim			
1	4 125 17	25 A		4 N/O	2
1	4 125 18 ¹	40 A		4 N/O	3
1	4 125 19 ¹	63 A		4 N/O	3
		Low noise power contactors with 230 V\sim coil and handle			
		2-pole - 250 V\sim			
1	4 125 58	I max 25 A		Type of contact 2 N/O	Number of modules 1
1	4 125 59 ¹	40 A		2 N/O	2
1	4 125 60 ¹	63 A		2 N/O	2
		4-pole - 400 V\sim			
1	4 125 61	25 A		4 N/O	2
1	4 125 62 ¹	40 A		4 N/O	3
1	4 125 63 ¹	63 A		4 N/O	3

Pack	Cat.Nos	Power contactors with 230 V\sim coil and handle				
		Manual override for test and repair function, carried out via the handle Permanent "ON" or "OFF" without automatic closing of the contactor				
		2-pole - 250 V\sim				
4	4 125 44	I max 25 A		Type of contact 2 N/O	Number of modules 1	
1	4 125 45 ¹	40 A		2 N/O	2	
1	4 125 47 ¹	63 A		2 N/O	2	
1	4 125 48 ¹	63 A		2 N/C	2	
		3-pole - 400 V\sim				
1	4 125 49 ¹	40 A			3 N/O	3
1	4 125 50 ¹	63 A	3 N/O		3	
		4-pole - 400 V\sim				
2	4 125 51	25 A		4 N/O	2	
1	4 125 53 ¹	40 A		4 N/O	3	
1	4 125 56 ¹	63 A		4 N/O	3	
1	4 125 57 ¹	63 A		4 N/C	3	

1: Handle can be accessed after removing blanking plate