



Belanko™ 15 A and 5 A British standard socket outlets


Cat. No(s): 6 170 50/51/52/53/54 - 6 173 50/51/52/54
 6 174 50/51/52/54



6 170 50



6 170 53



6 170 54


1. USE

One gang socket outlets in switched or unswitched versions designed to accept round pin plugs to BS 546.
 Supplied with 2 screws M3.5 for BS boxes.
 35 mm recommended depth back box.

2. RANGE

15 A socket outlets	White	Dark Grey	Brown
1 gang unswitched	6 170 50	6 173 50	6 174 50
1 gang single pole switched	6 170 51	6 173 51	6 174 51
1 gang single pole switched + neon	6 170 52	6 173 52	6 174 52
2 gang single pole switched	6 170 53	-	-
5 A socket outlets	White	Dark Grey	Brown
1 gang single pole switched	6 170 54	6 173 54	6 174 54

3. DIMENSIONS (mm)

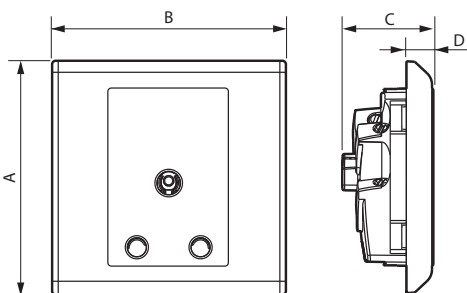

Cat. Nos	A	B	C	D
6 170 50	86	86	34	10
6 170 51/52	86	86	37.5	13.5
6 170 53	86	146	37.5	13.5
6 170 54	86	86	37.5	13.5

Profile size: 86 x 86 mm
 Distance of installation hole: 60.3 mm
 Profile size: 86 x 146 mm
 Distance of installation hole: 120.6 mm

4. CONNECTION

Terminal capacity

5 A socket 6 170 54:

Type of terminals: with screws
 3 x 2.5 mm²
 3 x 4 mm²
 1 x 6 mm²
 Stripping length: 8 mm
 Recommended screwdriver size: 4 mm flat blade
 Recommended tightening torque: 0.5 Nm

Terminal capacity

15 A sockets 6 170 50/51/52:

Type of terminals: with screws
 3 x 2.5 mm²
 3 x 4 mm²
 1 x 6 mm²
 Stripping length: 8 mm
 Recommended screwdriver size: 5 mm flat blade
 Recommended tightening torque: 2 Nm

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

- Impact tests: IK 04
- Protection against solid bodies and liquids: IP 40

5.2 Material characteristics

Thermoplastic with glossy finish
 Colour: White T084
 Dark Grey
 Brown

Self-extinguishing:

- + 850°C / 30 s for insulating parts holding live parts in place.
- + 650°C / 30 s for other parts made of insulating materials.

5.3 Electrical characteristics

Voltage: 250 V~
 Current: 15 A for 6 17x 50/51/52/53
 5 A for 6 17x 54

5.4 Climatic characteristics

Storage temperature: - 10°C to + 70°C
 Operating temperature: - 5°C to + 35°C

6. CLEANING

Surface cleaning with a soft, slightly damp cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
See e. catalogue.