


**Synergy™**  
**Lighting push-buttons 10 A**  
**Sleek design**

Cat. No(s): 8 320 07 - 8 322 07 - 8 324 07



**1. USE**


Lighting control switches complete delivered, with compact mechanisms for maximum wiring space and sleek design front plates.  
 For flush-mounting, back box to be min. 35 mm deep.  
 Fixing with screws.

**2. RANGE**

**Two-way push-buttons - 1-gang**

8 320 07	● Brushed stainless steel
8 322 07	● Polished stainless steel
8 324 07	● Glossy gold

**3. OVERALL DIMENSIONS (mm)**

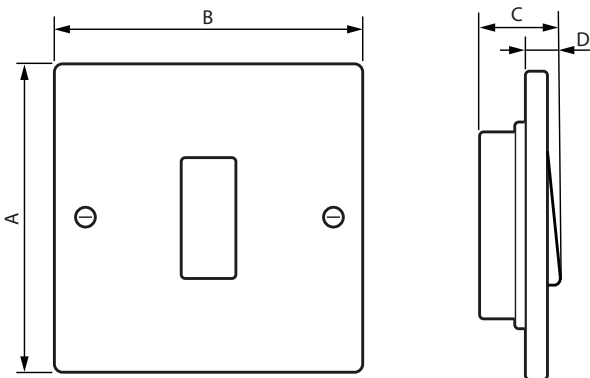

Cat. Nos	A	B	C	D
8 32x07	86	86	25	8

**4. CONNECTION**

Type of terminals : with screws  
 Terminal capacity: 4 x 1 mm<sup>2</sup> - 4 x 1.5 mm<sup>2</sup> - 2 x 2.5 mm<sup>2</sup> - 1 x 4 mm<sup>2</sup>  
 Stripping length: 8 mm  
 Compatible with flexible or rigid cables.

**5. TECHNICAL CHARACTERISTICS**

■ **5.1 Mechanical characteristics**

Impact tests: IK 01  
 Penetration by solid bodies/liquids: IP 20

■ **5.2 Material characteristics**

Rocker and plate:  
 - BSS: austenitic Brushed Stainless Steel - non magnetic - grade 304 L  
 - PSS: Polished Stainless Steel + rust resistance  
 - GG: Stainless Steel + rust resistance  
 Mechanism housing: PC  
 Halogen free  
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.  
 + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 V~  
 Current: 10 A  
 Frequency: 50/60 Hz

■ **5.4 Climatic characteristics**

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

**6. CLEANING**

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
 Resistance to the following cleaning substances:  
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

**Caution:** An initial test is required for the use of other special maintenance products.

**7. STANDARDS AND APPROVALS**

Compliance with standards of installation and manufacturing.  
 See e.catalogue.