



BSS 253



BIM 253

### Bimetallic Connectors

These connectors are used to join aluminium and copper tapes together. They are a neat and practical jointing method without the need for tinning, riveting or wrapping the joint.

Fix using countersunk woodscrew 1 1/2" x No. 10 wall plug.

Conductor Size mm	Material Type	L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
25 x 3	Aluminium & Copper	98	29	25	0.20	10	BIM 253
	Stainless Steel	76	21	20	0.16		BSS 253

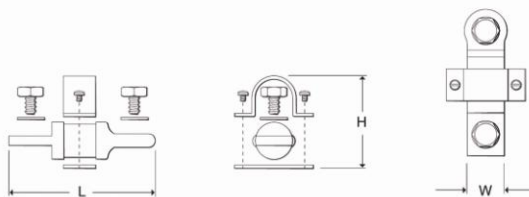

### 'B' Bonds

This Wallis 'B' bond is used for bonding aluminium and copper tapes to flat metal surfaces.

#### For use with Copper Tapes

Conductor Size mm	L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
25 x 3	35	35	10	0.03	10	BBG 253 SS

**Material:** Gunmetal with M10 x 35mm Stainless Steel Set Screw.

#### For use with Aluminium Tapes

Conductor Size mm	L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
25 x 3	35	35	10	0.01	10	BBA 253

**Material:** Aluminium with M10 x 35mm Stainless Steel Set Screw.



BBG 253 SS



BBA 253

