


CEILING LIGHTS






CLI Series-1

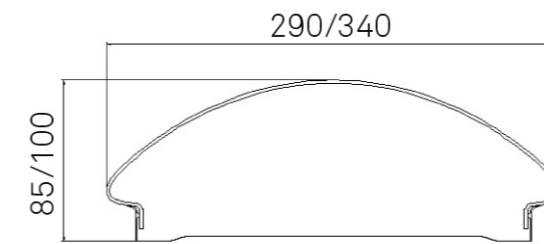

Technical Specification

Size: Ø290mm x Height 100mm/
 Ø290mm x Height 100mm/
 Ø340mm x Height 85mm
 Input current: 0.048A (230V)/0.096A(230V)/
 0.057A(230V)
 Output current: 0.33A/0.32A/ 0.36A
 Power factor: >0.9
 Efficiency: >85%
 Light Intensity: 620cd/ 578.74cd/479.89cd
 Luminous flux: 8001lm/1650lm/1722lm
 Net weight: 0.75kg/1.665kg/1.4kg
 Mild Steel Body
 Glass Cover

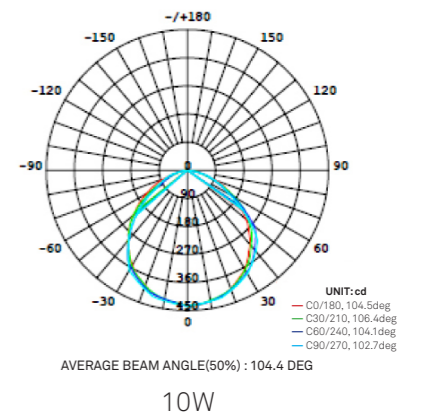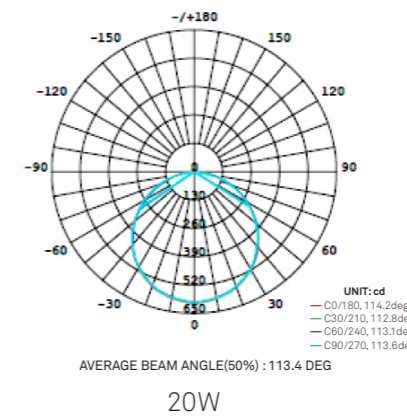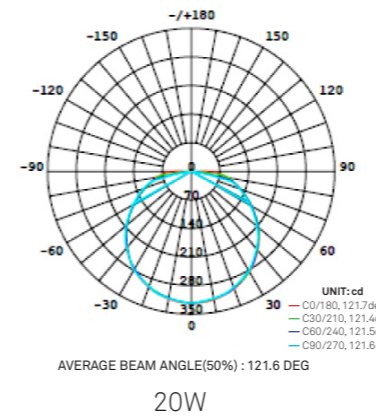



Model	Power	Input Voltage	Output voltage	Beam Angle	Color Temperature	CRI
CLS-10-LSY290GB	10W	85-265VAC 47-63HZ	30V	104°	2800-3200K/ 4000-4500K/ 5500-6000K	>75 RA
CLS-20-LSY290GB	20W			113°		
CLS-20-LSY340GB	20W			127°		




CLI Series-2

Technical Specification

Size: Ø350mm x Height 105mm/
 Ø410mm x Height 110mm
 Input current: 0.096A(230V)/0.192A(230V)
 Output current: 0.648A/0.98A
 Power factor: >0.9
 Efficiency: >85%
 Light Intensity: 760cd/ 1100cd
 Luminous flux: 16001lm/3200lm
 Net weight: 1kg/1.5kg
 Mild Steel / Die-cast Aluminium Body
 PMMA Cover

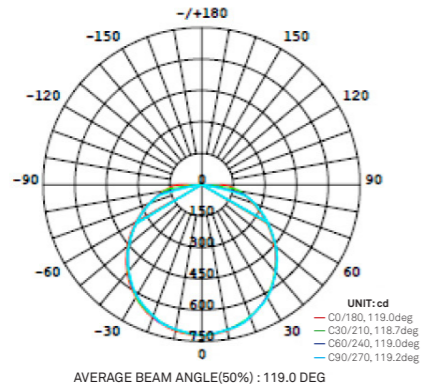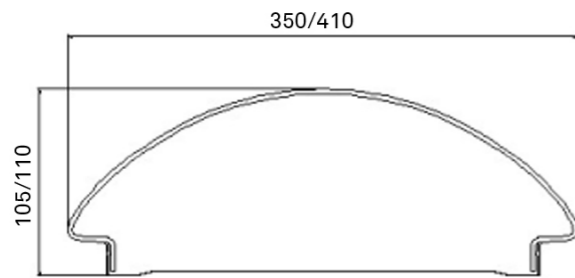

40W

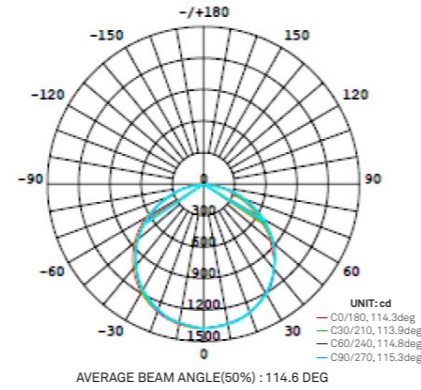

20W



Model	Power	Input Voltage	Output voltage	Beam Angle	Color Temperature	CRI
CLS-20-LSY350YB	20W	85-265VAC 47-63HZ	31V	114°	2800-3200K/ 4000-4500K/ 5500-6000K	>75 RA
CLS-40-LSY410YB	40W			119°		




CLI Series-3

Technical Specification

Size: Ø330mm x Height 100mm/
 Ø330mm x Height 100mm/
 Input current: 0.057A(230V)/0.101A(230V)/
 0.106A(230V)
 Output current: 0.32A
 Power factor: >0.9
 Efficiency: >85%
 Light Intensity: 479.89cd/578.74cd
 Luminous flux: 10201lm/1806lm/18081lm
 Net weight: 1.216kg/1.5kg/1.2kg
 Mild Steel Body
 Glass Cover

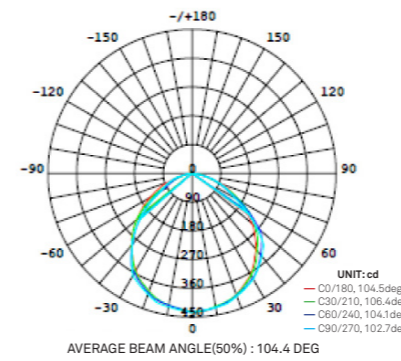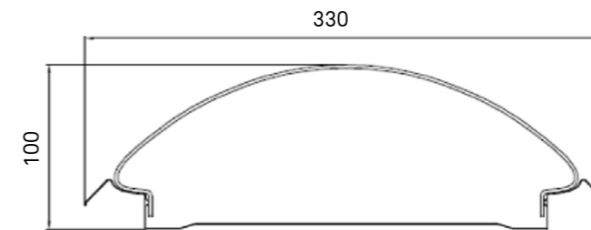

10W

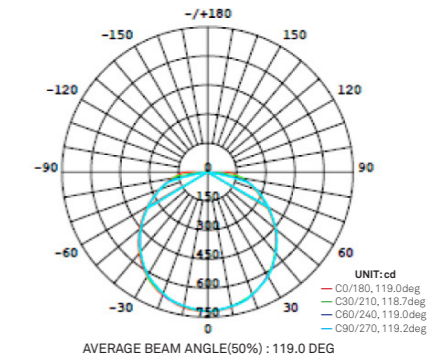

20W

Model	Power	Input Voltage	Output voltage	Beam Angle	Color Temperature	CRI
CLS-10-LSN330GB	10W	85-265VAC 47-63HZ	30V	104°	2800-3200K/ 4000-4500K/ 5500-6000K	>75 RA
CLS-20-LSN330GB	20W			119°		