






EPC500 BUILT TO BE THE MOST FLEXIBLE CHAIR TODAY

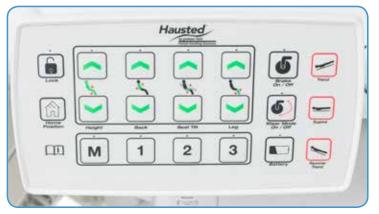

POSITIONING AT YOUR FINGERTIPS:

Intuitive Hand Pendant with Pre-Sets and 3 Memory Positions



SMART CASTER TECHNOLOGY

with Auto Braking and Advanced Steering for Improved Patient and Staff Safety







FROM TREATMENT ROOMS TO RADIOLOGY

+ standard rounding method used for whole metric values

Color variations may occur due to monitor or printer settings



EPC500 DESIGNED AS A SINGLE PATIENT PLATFORM FROM START TO FINISH

Counter Rotating Side Rails with Urethane Comfort Arm Rests for Improved Patient Safety and Comfort



Low Profile Base for Smaller Spaces and Greater Clearance





‡ standard rounding method used for whole metric values







EPC500 BUILT TODAY. DESIGNED FOR TOMORROW



Standard Accessories:

Description	UOM
Telescoping IV Pole	1/ea
Safety Strap	1/ea
Utility Bag Hook	1/ea

Two-position Foot Rest For Patient Comfort and Safety

Optional Accessories:

Item No.	Description	UOM
HSA080003	OxyFlex II Oxygen Delivery System	1/ea
HSA008000	OxyFlex II Diffusion Trays	25/cs
HSA080014	Hi/Lo Foot Switch	1/ea
HSA080013	Shoulder Support Rails	1/pr
HSA080020	Foot End Push Handles	1/pr
HSA080009	O2 Tank Holder	1/ea
HSA080029	Orthopedic Hand Surgery Board	1/ea

WARNING: This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP) which is known to the State of California to cause cancer and birth defects or other reproductive harm.

Color variations may occur due to monitor or printer settings.



Width:	JZ	01
Length:	83	211
Height: maximum	40	102
Height:	20	51
Patient Surface Width:	26	66
Patient Surface Length: minimum	70.50	179
Patient Surface Length: maximum	78.50	199
Side Rail Length:	18.50	47
Side Rail Height:	10.25	26
Caster Diameter:	5	13
Multi-Density Sectional Pad: Dura-Gel™ insert, urethane cover	3	8

	degree 🖺	
Trendelenburg:	15	
Reverse Trendelenburg:	6	
Seat Tilt:	0-15	
Backrest Range:	0-90	

	volts	
Dual Power:	110-240	
	lb	kg [†]
Product Weight:	265	120
Weight Capacity: EVENLY DISTRIBUTED	600	272
Shipping Weight:	375	170

[‡] standard rounding method used for whole metric values





CE Partner4U BV Esdoornlaan 13 3951 DB Maarn The Netherlands www.cepartner4u.eu















