Owner's Manual Shellback





SPECIFICATIONS

CASE SIZE

Diameter 40 mm Lug-to-lug 47 mm Thickness 11,9 mm (sapphire excl.) Lug width 20 mm

MOVEMENT

Ronda Mecano Calibre R150 Automatic 28.800 BPH Hacking 40 hour power-reserve

DIAL

Sandwich dial Brushed blue or High gloss black enamel

> WEIGHT 172 gram

GLASS Double domed sapphire crystal AR coated

CASE 316L surgical grade stainless steel

CROWN Screw-in big crown with moulded artwork

HANDS Signature Tusenö hands

WATER RESISTANCE 20 ATM / 200 meters


LUME BGW9 Swiss Super-LumiNova

BEZEL 120 click uni rotating bezel Ceramic inlay

STRAP 20MM Flat top steel bracelet (diver clasp) + Tropic rubber (pre-order only) + Nato strap (pre-order only)





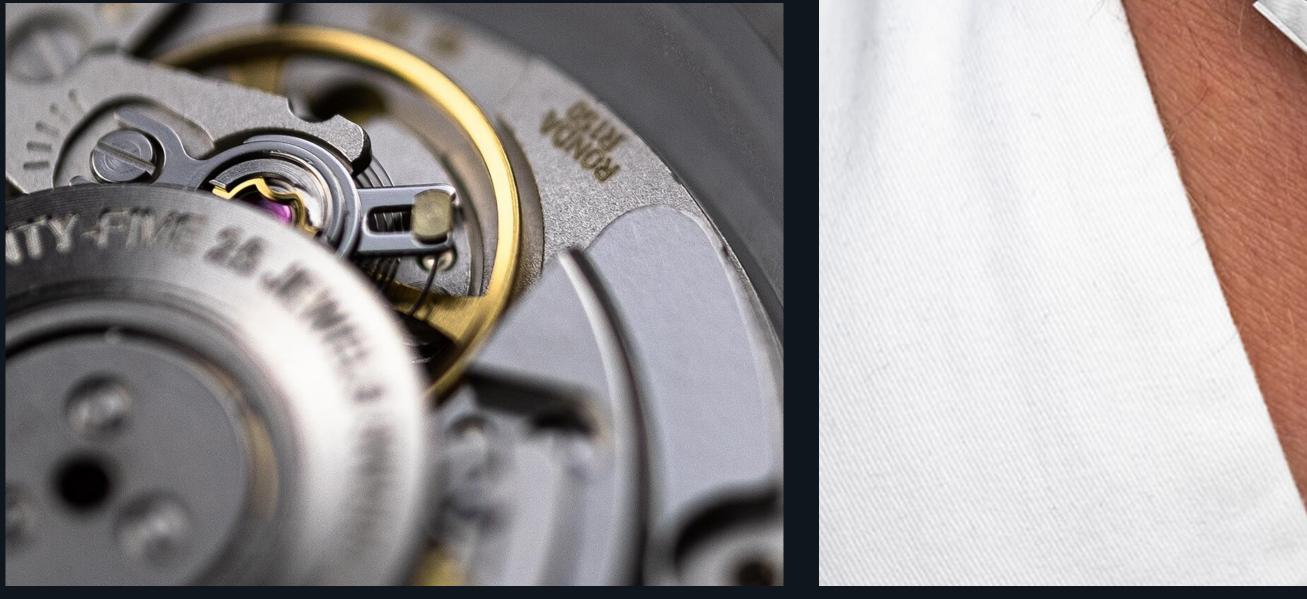



INSTRUCTIONS

Shellback is powered by the Ronda Mecano Calibre R150 movement. Here is an overview of the functions of the movement.


To manually wind your movement, unscrew the crown (position 2) and gently turn the crown clockwise (approx 25 winds) until you feel a resistance. Do not continue winding at this point, this could damage your watch.

To set the time of your watch, simply pull the crown to position 4 and set the time correctly. To set the date push it into position 3.

Make sure to always screw back the crown to position 1 before using the watch. Wearing your watch with the crown not correctly screwed in could damage your watch.

CROWN POSITION

- 1. Screwed in position
- 2. Manual wound position
- 3. Date setting position
- 4. Time setting position

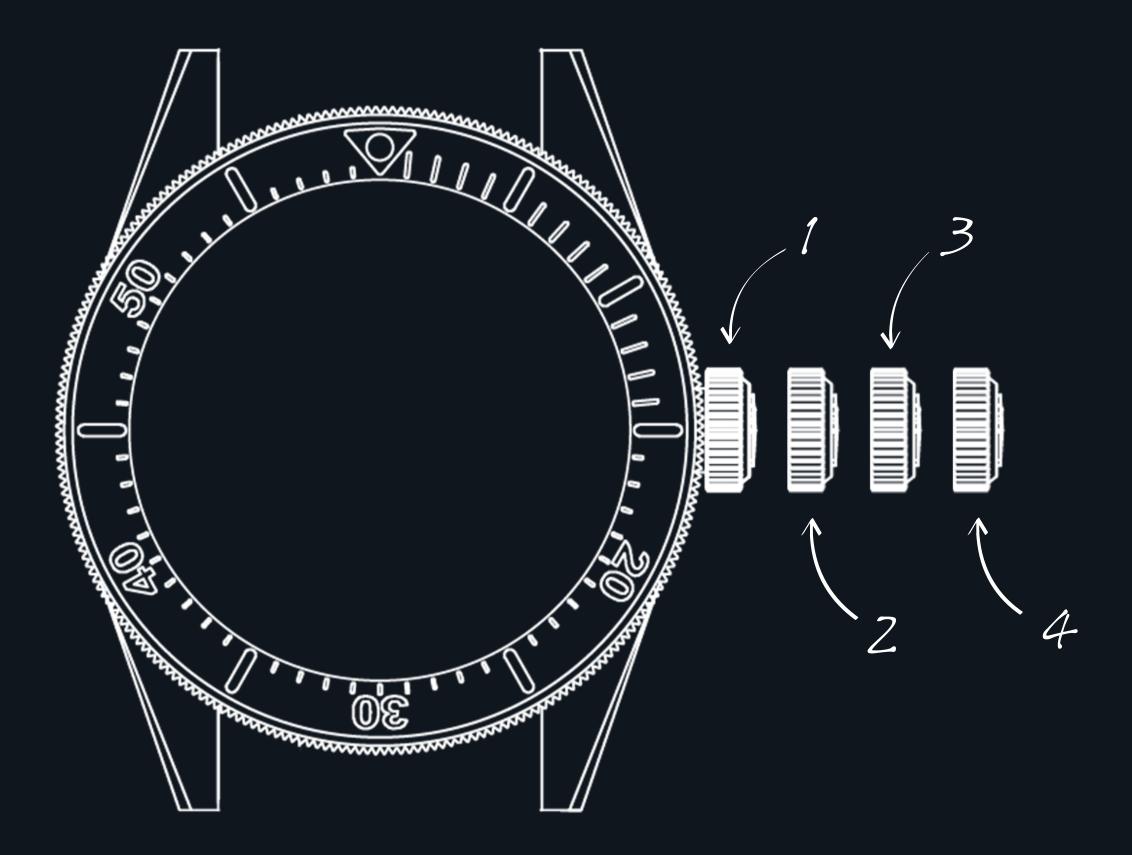



FOR MORE INFORMATION VISIT <u>TUSENO.COM/INFO</u> OR SEND US AN EMAIL – HELLO@TUSENO.COM

TUSENÖ SHOWROOM – RISÅSGATAN 12 – 413 07 GÖTEBORG – SWEDEN

