



BELAY

CAMERA STRAP

Belay Quick-Release +
0.75 / 1.5-Inch Camera Strap

VERSION 1.1



What's Included

Belay Quick-Release Mount Only [BLY-CS-QRS]

Quick-Release Plate | Belay Mount | Hex Key

Belay + Quick-Release 0.75-Inch Camera Strap [BLY-CS-SM]

Quick-Release Plate | Belay Mount

0.75-Inch Camera Strap | Hex Key


Belay + Quick-Release 1.5-Inch Camera Strap [BLY-CS-LG]

Quick-Release Plate | Belay Mount

1.5-Inch Camera Strap | Hex Key

BELAY

CAMERA STRAP

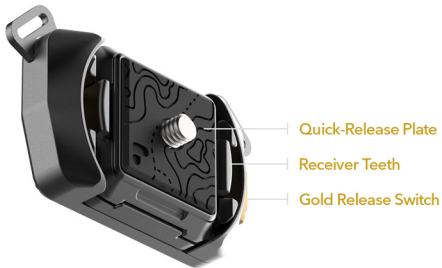

Quick-Release Plate **Installation**

Step 1

Place left hand on the Belay body and right hand on the Quick-Release Plate.

Place right hand thumb and middle finger on the open sides of the Quick-Release Plate, and your index finger on the screw threads.

Step 2

Press and hold Gold Release Switch then rotate Quick-Release Plate counterclockwise while pulling up with your index finger on the screw threads.

Step 3

Using provided Hex Tool or coin, secure the Quick-Release Plate to the camera.

Attach to **Belay**

Step 1

Angle your camera so the Quick-Release Plate is partially engaged with the Reciever Teeth.

Step 2

Push down until fully seated in the Belay, and you hear the plate click into place.

Step 3

Shake the camera to ensure both teeth are secure before releasing your camera.

Remove from **Belay**

Step 1

Press and hold the Gold Release Switch.

Step 2

Twist camera counterclockwise to release from the Belay.

Still unsure about your Belay installation, check out the getting started video located on our YouTube Channel or FAQ page.

GETTING STARTED VIDEO

More **Info**

Tutorials

For additional help be sure to visit our YouTube page:

[youtube.com/polarprofilters](https://www.youtube.com/polarprofilters)

for tutorials and more.

Questions

Contact us at anytime via our website, or shoot us an email. We're happy to help.

polarpro.com | 949.220.9395

support@polarpro.com