



# Instruction Manual Book

Item code: BH186

# Antonov An - 2

Glow and EP

95% PRE BUILT  
**ARF**  
ALMOST READY TO FLY



**ONLY INCLUDING OLEO STRUTS.  
ALL Balsa - PLY WOOD CONSTRUCTION  
COVERED IN A HEAT – SHRINK FILM WITH PRINTED.**

## 95% ALMOST READY TO FLY SPECIFICATION:

- Wingspan: 2,425 mm (95.47 in).
- Length: 1,710 mm (67.32 in).
- Weight: 9.6kg (21.12 lbs).
- Wing area: 130.12 dm<sup>2</sup>.
- Wing loading: 73.78 g/dm<sup>2</sup>.
- Wing type: Naca Airfoil.
- Servo mount: 42mm x 21mm  
37mm x 16mm elevator.
- Spinner: Aluminium 44mm (included).
- Gear type: Oleo struts for main gear (included).
- Tail gear: Oleo struts for tail gear (included).

### **Parts listing required (not included):**

- Radio: 06 channels minimum.
- Servo: 10 standard high torque servos  
(size 39.9 x 20.12 x 37.1)mm  
+ 2 standard high torque servos  
(size 35 x 15)mm elevator
- Engine: 30 – 35cc gas
- Motor: Brushless outrunner 2500 - 3200W, 245KV.
- Propeller: Suit with your engine.

### **Recommended Motor and Battery set up (not included):**

- Motor: Admiral GP26 6330-245KV Brushless.
- Lipo cell: 6-10 cells 4000 – 5500 mAh.
- Receiver battery: 6V-7.4V/ 1200 – 2200 mAh.
- ESC: 80 - 100A.

Made in Vietnam.

# TABLE OF CONTENTS

▶ Introduction.....	2	▶ Horizontal stabilizer installation.....	33
▶ Warranty.....	3	▶ Horizontal stabilizer struts.....	35
▶ Disclaimer.....	3	▶ Installing the rudder.....	36
▶ Safety precaution.....	3	▶ Installing the tail gear .....	38
▶ Important building notes.....	3	▶ Installing the engine.....	43
▶ Suggestion.....	3	▶ Asseembly fuel tank guide.....	46
▶ Flight warnings.....	3	▶ Installing the fuel tank.....	48
▶ Covering tools.....	4	▶ Installing the throttle.....	50
▶ Adhesives and required tools.....	4	▶ Mounting the cowling.....	51
▶ Academy of Model Aeronautics National Model Aircraft Safety Code.....	4	▶ Installing the switch, receiver and battery..	56
▶ Parts listing (not included).....	6	▶ Installing the electric motor (ep version )..	57
▶ Symbols used throughout this instruction manual comprise.....	6	▶ Installing the cockpit.....	59
▶ Installing the ailerons and flaps servos of high wing .....	9	▶ Installing canopy fuselage.....	61
▶ Installing the ailerons and flaps servos of low wing.....	14	▶ Installing the propeller and spinner.....	64
▶ Installing the low wing light.....	19	▶ Balacing.....	66
▶ Installing the main gear.....	20	▶ Control throws.....	67
▶ Installing the fuselage servos.....	26	▶ Pre-fling check.....	67
▶ Installing the wing struts.....	30	▶ For your radio installation basic connection for airplane and adjustment of servos.....	68
▶ Horizontal stabilizer installation.....	31	▶ Main gear dimensional detail.....	69
▶ Elevator control horn and elevator pushrod installation.....	31	▶ Tail gear dimensional detail.....	69
		▶ Decoration.....	70
		▶ Exploded view.....	71

## INTRODUCTION

Thank you for purchasing Black Horse Model products. With over 18 years experience in production and fly testing, Black Horse Model is committed to bring the best quality products and good service to customers. Along with a team of creative engineers and skilled workers, we will always accompany with customers by our great experiences, fully enthusiasm... which will burn our passion!! Joining with us to explore and conquer challenges in the sky ...

Your satisfaction is our success. Please read through this manual before starting construction.

**Academy of Model Aeronautics:** If you are not already a member of the AMA, please join! The AMA is the governing body of model aviation and membership provides liability insurance coverage, protects modelers' rights and interests and is required to fly at most R/C sites.

**Academy of ModelAeronautics**  
5151 East Memorial Drive Muncie IN 47302-9252

Tele. (800) 435-9262  
Fax. (765) 741-0057

Or via the Internet at: <http://www.modelaircraft.org>



## WARRANTY

Black Horse Model guarantees the component parts in this kit to be free from defects in both material and workmanship at the date of purchase by the purchaser.

This warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of or to any part of the Product.

This warranty does not cover damage due to improper installation, operation, maintenance, or attempted repair by anyone other than Black Horse Model.

Further, Black Horse Model reserves the right to change or modify this warranty without notice.

## DISCLAIMER

Read this disclaimer carefully before using this product. Please strictly follow the instruction manual to assemble and use this.

In that Black Horse Model has no control over the final assembly or material used for final assembly, Black Horse Model is not responsible for loss of use, or other incidental or consequential damages.

Furthermore, Black Horse Model cannot be held liable for personal injury or property damage caused by the use or misuse of Black Horse Model products. By the act of using the user-assembled products, the user accepts all resulting liability.

## SAFETY PRECAUTION

- This is not a toy and pilots must be over the age of 14
- Be sure that no other flyers are using your radio frequency.
- Do not smoke near fuel
- Store fuel in a cool, dry place, away from children and pets.
- Wear safety glasses.
- The glow plug clip must be securely attached to the glow plug.
- Do not flip the propeller with your fingers.
- Keep loose clothing and wires away from the propeller.
- Do not start the engine if people are near. Do not stand in line with the side of the propeller.
- Make engine adjustments from behind the propeller only. Do not reach around the spinning propeller.
- Moisture causes damage to electronics. Avoid water exposure to all equipment not specifically designed and protected for this purpose.

## IMPORTANT BUILDING NOTES

- Please trial fit all the parts. Make sure you have the correct parts and that they fit and are aligned properly before gluing! This will assure proper assembly. This kit is hand made from natural materials, every plane is unique and minor adjustments may have to be made. However, you should find the fit superior and assembly simple.
- The painted and plastic parts used in this kit are fuel proof. However, they are not tolerant of many harsh chemicals including the following: paint thinner, C/A glue accelerator, C/A glue debonder and acetone. Do not let these chemicals come in contact with the colors on the covering and the plastic parts.
- Some parts included in this kit such as the cowl or wheel pants are made of fiberglass, the fibers of which may cause eye, skin and respiratory tract irritation. Never blow into a part to remove fiberglass dust, as the dust will blow back into your eyes. Always wear safety goggles, a particle mask and rubber gloves when grinding, drilling and sanding fiberglass parts. Vacuum the parts and the work area thoroughly after working with fiberglass parts.

## SUGGESTION

To avoid scratching your new airplane, do not unwrap the pieces until they are needed for assembly. Cover your workbench with an old towel or brown paper, both to protect the aircraft and to protect the table. Keep a couple of jars or bowls handy to hold the small parts after you open the bag.

## FLIGHT WARNINGS

- Always operate in open areas, away from factories, hospitals, schools, buildings and houses etc.
- NEVER fly your aircraft close to people or built up areas.
- NEVER fly near power lines, aerials or other dangerous areas including airports, motorways etc.
- NEVER fly in wet conditions or on windy or stormy days.
- ALWAYS adjust the engine from behind the propeller, and do not allow any part of your body to be in line with the propeller.
- THE PROPELLER IS DANGEROUS Keep fingers, clothing (ties, shirt sleeves, scarves) or any other loose objects that could be caught or drawn in, away from the propeller. Take care at ALL times.
- NEVER use damaged or deformed propellers or spinners.
- Keep all onlookers (especially small children and animals) well back from the area of operation. This is a flying aircraft, which will cause serious injury in case of impact with a person or animal.
- DO NOT dispose of empty fuel containers on a fire, this can lead to an explosion.

## FLIGHT WARNINGS

- When ready to fly, first extend the transmitter aerial.
- Switch on the transmitter.
- Switch on the receiver.
- Check that the wings are correctly fitted to the fuselage.
- Operate the control sticks on the transmitter and check that the control surfaces move freely and in the CORRECT directions.
- Check that the transmitter batteries have adequate power.
- ALWAYS take off into the wind.
- If the model does not respond correctly to the controls, land it as soon as possible and correct the fault.
- ALWAYS land the model INTO the wind, this ensures that the model lands at the slowest possible speed.
- Switch off the receiver.
- Switch off the transmitter.
- Empty the fuel tank after flying, fuel left in the tank can cause corrosion and lead to engine problems.

## COVERING TOOLS

- Top Flite® MonoKote® Sealing Iron
- Top Flite Hot Sock Iron Cover
- Top Flite MonoKote Trim Seal Iron
- Top Flite MonoKote Heat Gun

## ADHESIVES AND REQUIRED TOOLS

- Thin CA
- 30-minute epoxy
- 6-minute epoxy
- Threadlocker thread locking cement
- Mixing sticks
- Mixing cups (GPMR8056)
- Epoxy brushes
- Denatured alcohol
- Canopy Glue
- Felt-tipped pen or pencil
- Flat screwdriver
- Adjustable wrench
- Drill
- Hobby knife
- Masking tape
- Phillips screwdriver (large)
- Phillips screwdriver (small)
- Ruler
- Sandpaper
- Soldering iron
- Solder
- Hex wrench
- Drill bit: 1/16-inch (1.5mm), 5/64-inch (2mm), 1/8-inch (3,2mm), 3/16-inch (4,8mm), 11/64-inch (4.5mm), 13/64-inch (5,2mm), 1/4-inch (6,4mm)

## Academy of Model Aeronautics National Model Aircraft Safety Code

**Effective January 1, 2018**

A. GENERAL: A model aircraft is a non-human-carrying device capable of sustained flight within visual line of sight of the pilot or spotter(s). It may not exceed limitations of this code and is intended exclusively for sport, recreation, education and/or competition. All model flights must be conducted in accordance with this safety code and related AMA guidelines, any additional rules specific to the flying site, as well as all applicable laws and regulations.

As an AMA member I agree:


- I will not fly a model aircraft in a careless or reckless manner.
- I will not interfere with and will yield the right of way to all human-carrying aircraft using AMA's See and Avoid Guidance and a spotter when appropriate.
- I will not operate any model aircraft while I am under the influence of alcohol or any drug that could adversely affect my ability to safely control the model.
- I will avoid flying directly over unprotected people, moving vehicles, and occupied structures.
- I will fly Free Flight (FF) and Control Line (CL) models in compliance with AMA's safety programming.
- I will maintain visual contact of an RC model aircraft without enhancement other than corrective lenses prescribed to me. When using an advanced flight system, such as an autopilot, or flying First-Person View (FPV), I will comply with AMA's Advanced Flight System programming.
- I will only fly models weighing more than 55 pounds, including fuel, if certified through AMA's Large Model Airplane Program.
- I will only fly a turbine-powered model aircraft in compliance with AMA's Gas Turbine Program.
- I will not fly a powered model outdoors closer than 25 feet to any individual, except for myself or my helper(s) located at the flightline, unless I am taking off and landing, or as otherwise provided in AMA's Competition Regulation.
- I will use an established safety line to separate all model aircraft operations from spectators and bystanders.



- Officially designated AMA Air Show Teams (AST) are authorized to use devices and practices as defined within the Team AMA Program Document. (AMA Document #718.)
- (j) Not operate a turbine-powered aircraft, unless in compliance with the AMA turbine regulations. (AMA Document #510-A.)
- 3. Model aircraft will not be flown in AMA sanctioned events, air shows or model demonstrations unless:
  - (a) The aircraft, control system and pilot skills have successfully demonstrated all maneuvers intended or anticipated prior to the specific event.
  - (b) An inexperienced pilot is assisted by an experienced pilot.
- 4. When and where required by rule, helmets must be properly worn and fastened. They must be OSHA, DOT, ANSI, SNELL or NOCSAE approved or comply with comparable standards.
- B. RADIO CONTROL (RC)
  1. All pilots shall avoid flying directly over unprotected people, vessels, vehicles or structures and shall avoid endangerment of life and property of others.
  2. A successful radio equipment ground-range check in accordance with manufacturer's recommendations will be completed before the first flight of a new or repaired model aircraft.
  3. At all flying sites a safety line(s) must be established in front of which all flying takes place. (AMA Document #706.)
    - (a) Only personnel associated with flying the model aircraft are allowed at or in front of the safety line.
    - (b) At air shows or demonstrations, a straight safety line must be established.
    - (c) An area away from the safety line must be maintained for spectators.
    - (d) Intentional flying behind the safety line is prohibited.
  4. RC model aircraft must use the radio-control frequencies currently allowed by the Federal Communications Commission (FCC). Only individuals properly licensed by the FCC are authorized to operate equipment on Amateur Band frequencies.
  5. RC model aircraft will not knowingly operate within three (3) miles of any pre-existing flying site without a frequency-management agreement. (AMA Documents #922 and #923.)
  6. With the exception of events flown under official AMA Competition Regulations, excluding takeoff and landing, no powered model may be flown outdoors closer than 25 feet to any individual, except for the pilot and the pilot's helper(s) located at the flightline.
  7. Under no circumstances may a pilot or other person touch an outdoor model aircraft in flight while it is still under power, except to divert it from striking an individual.
  8. RC night flying requires a lighting system providing the pilot with a clear view of the model's attitude and orientation at all times. Hand-held illumination systems are inadequate for night flying operations.
  9. The pilot of an RC model aircraft shall:
    - (a) Maintain control during the entire flight, maintaining visual contact without enhancement other than by corrective lenses prescribed for the pilot.
    - (b) Fly using the assistance of a camera or First-Person View (FPV) only in accordance with the procedures outlined in AMA Document #550.
    - (c) Fly using the assistance of autopilot or stabilization system only in accordance with the procedures outlined in AMA Document #560.
- C. FREE FLIGHT
  1. Must be at least 100 feet downwind of spectators and automobile parking when the model aircraft is launched.
  2. Launch area must be clear of all individuals except mechanics, officials, and other fliers.
  3. An effective device will be used to extinguish any fuse on the model aircraft after the fuse has completed its function.
- D. CONTROL LINE
  1. The complete control system (including the safety thong where applicable) must have an inspection and pull test prior to flying.
  2. The pull test will be in accordance with the current Competition Regulations for the applicable model aircraft category.
  3. Model aircraft not fitting a specific category shall use those pull-test requirements as indicated for Control Line Precision Aerobatics.
  4. The flying area must be clear of all utility wires or poles and a model aircraft will not be flown closer than 50 feet to any above-ground electric utility lines.
  5. The flying area must be clear of all nonessential participants and spectators before the engine is started.


**PARTS LISTING (NOT INCLUDED).**

**Servo extension leads.**

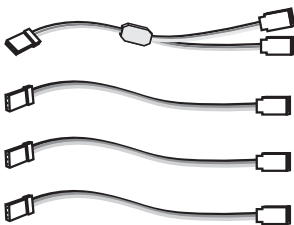


.....4pcs.  
 920mm ..... 2 pcs.  
 430mm ..... 8 pcs.  
 220mm ..... 4pcs.


LiPo. 6S - 22.2V- 4,000 - 5,500mAh.

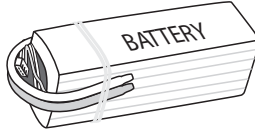

2 Packs

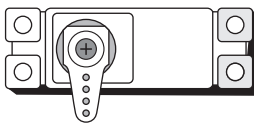
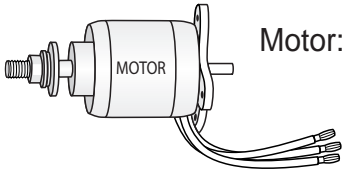


Servos size: (39.9 x 20.1 x 38.1)mm.  
 Torque servos: 4.8V(7.92kg/cm), 6V(9.43kg/cm) .... pcs

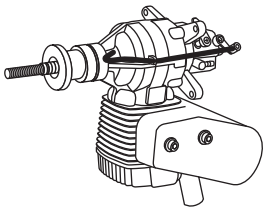


Engine: 33 - 35 cc gas

Propeller. Suit with your engine.


















Motor: RIMFIRE.1.60






ESC: 100 A ..... pcs

**Symbols used throughout this instruction manual, comprise:**



 Cut off excess.	 Apply threadlocker (screw cement).	 Must be purchased separately!
 Cut off shaded portion carefully.	 Apply instant glue (C.A glue, super glue).	 Ensure smooth, non-binding movement when assembling.
 Pay close attention here.	 Apply epoxy glue.	 Drill holes using the stated (in this case 1.5mm ø).
 Take particular care here.	 Assemble left and right sides the same way	 The number of times the same way Assembly (in this case twice).
 <b>Warning!</b> Set all screws securely . If they come off during flight you will lose control of your aircraft!		 Use a pencil to mark


- ① : Fuselage(1a: Engin mount, 2b: Motor mount).
- ② : Wing ( 2a, 2b, 2c, 2d ).
- ③ : Cockpit fuselage ( 3a: Pilot doll, 3b: Cockpit, 3c: Panel, 3d1: Right window, 3d2: Left window, 3e: Canopy, 3g: Centre Stick, 3f: Wind Screen)
- ④ : Horizontal stabilizer( 4a,4b ).
- ⑤ : Cowling.
- ⑥ : Aluminium wing tube.
- ⑦ : Aluminium main landing gear.
- ⑧ : Electric motor spare part.
- ⑨ : Aluminium Landing gear struts (9a, 9b)
- ⑩ : Aluminium fuselage strut attachment
- ⑪ : Wheels.
- ⑫ : Engine spare part.
- ⑬ : Tail gear spare part.
- ⑭ : Fuel Tank.
- ⑮ : High wing spare part.
- ⑯ : Low wing spare part.
- ⑰ : Horizontal stabilizer spare part.
- ⑱ : Vertical stabilizer spare part.
- ⑲ : Wing struts spare part.
- ⑳ : Spinner spare part.
- ㉑ : CG spare part.

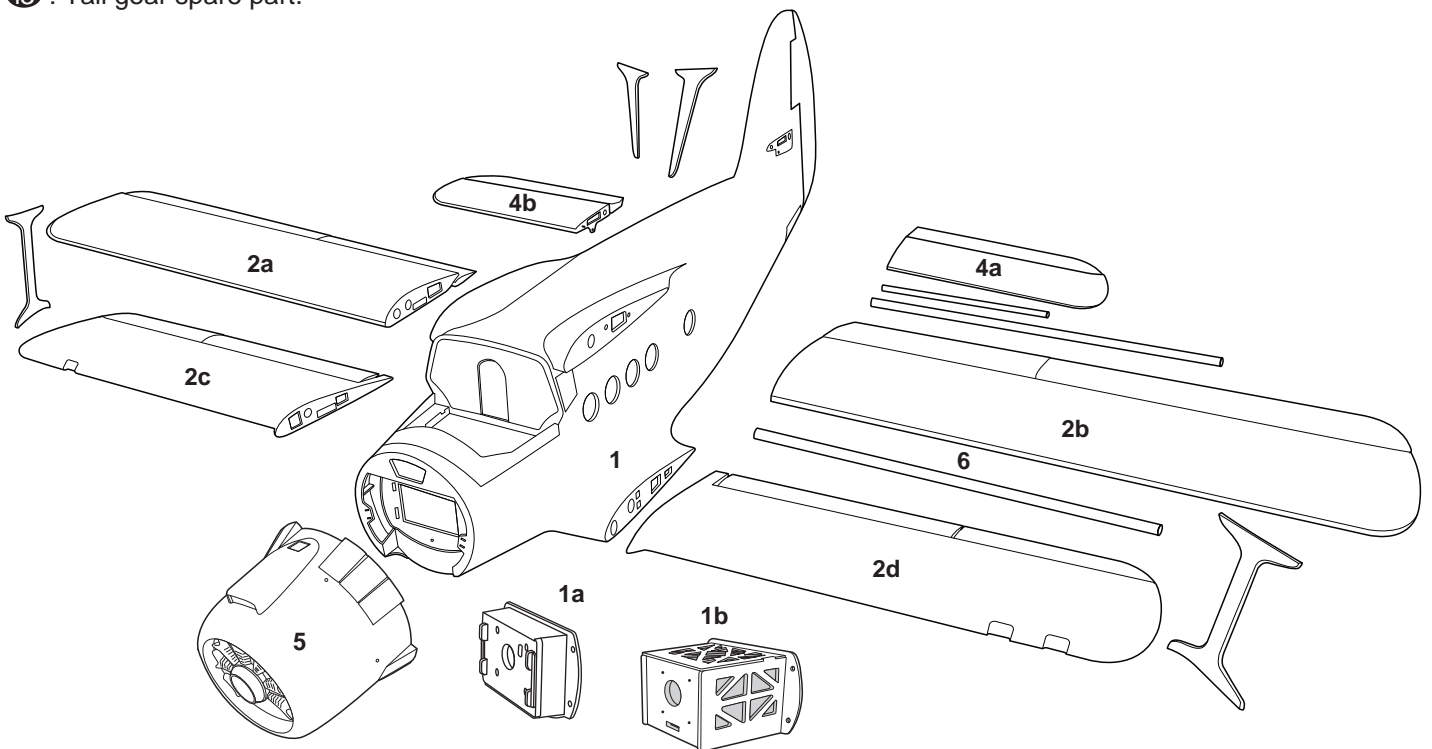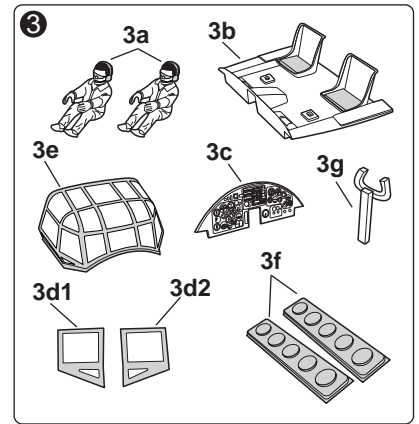




5x90mm Socket Head Cap Screw ----- 4	5x25mm Button Head Cap Screw ----- 5
12x60mm Aluminium ----- 4	5mm Flat Washer ----- 4
5mm Spring Washer ----- 9	5mm Lock Nut ----- 9
5mm Flat Washer ----- 4	Connector (use in page 50) ----- 1
16x5mm Flat Washer ----- 14	500mm Pushrod wire ----- 1
5mm Glass Fiber Washer ----- 4	Engin mount 


**⑫**


6x25mm Plastic Screw ----- 3	4mm Flat Washer ----- 4	<b>⑧</b> Motor mount 
Battery Tray 	4mm Spring Washer ----- 4	
4x20mm Button Head Cap Screw ----- 4	M4 Blind Nut ----- 4	

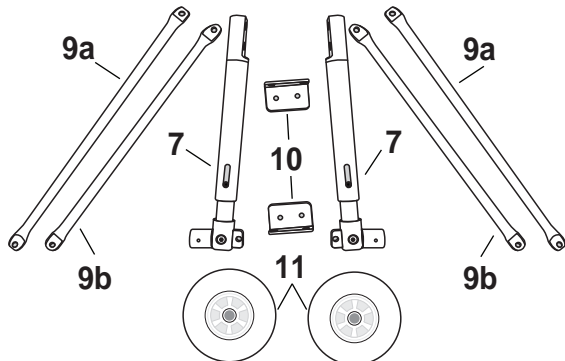

5x55mm Socket Head Cap Screw ----- 2	5x16mm Flat Washer ----- 2	
4x25mm Socket Head Cap Screw ----- 4	4x15mm Button Head Cap Screw ----- 6	
4x10mm Socket Head Cap Screw ----- 4	4mm Spring Washer ----- 8	
4mm Spring Washer ----- 8	4mm Flat Washer ----- 4	
	4mm Lock Nut ----- 4	


<p>Cab link ..... 2</p> <p>M3 Metal Clevis ..... 2</p> <p>1200mm Cable ..... 2</p> <p>Locknut ..... 4</p>	<p>3x15mm Button Head Cap Screw ..... 4</p> <p>3mm Flat Washer ..... 4</p> <p>3mm Spring Washer ..... 4</p>	<p>3mm Hex Nut ..... 2</p>  <p>13</p>	<p>Magnetic Anodized Fuel Dot ..... 1</p> <p>Alu. Anodized Fuel Vent Line Plug ..... 1</p>	<p>Fuel Tank ..... 1</p> 	<p>14</p>
---	---	--	--	--	-----------

<p>Pinned Hinge ..... 14</p> <p>Ball link ..... 8</p> <p>2.6x85mm Push rod ..... 2</p> <p>2.6x80mm Push rod ..... 2</p>	<p>Horn ..... 4</p> <p>3x12mm Button Head Cap Screw ..... 8</p> <p>3mm Flat washer ..... 4</p>	<p>3mm Lock Nut ..... 8</p> <p>2x10mm Tp Screw ..... 44</p> <p>6X50 Aluminium ..... 2</p> <p>Plastic ..... 2</p>	<p>Aluminium tube. Ø19mm 700mm</p> 	<p>15</p>
---	--	--	--	-----------

<p>Pinned Hinge ..... 12</p> <p>Ball link ..... 8</p> <p>2.6x85mm Push rod ..... 2</p> <p>2.6x80mm Push rod ..... 2</p>	<p>Horn ..... 4</p> <p>3x12mm Button Head Cap Screw ..... 8</p> <p>3mm Flat washer ..... 4</p> <p>3mm Lock Nut ..... 8</p>	<p>2x10mm Tp Screw ..... 40</p> <p>6X50 Aluminium ..... 2</p> <p>Plastic ..... 2</p> <p>Plastic Light Right wing light ..... 1</p> <p>Plastic Light cover Left wing light ..... 2</p>	<p>Aluminium tube. Ø19mm 687mm</p> 	<p>16</p>
---	--	---	---	-----------


<p>Pinned Hinge ..... 6</p> <p>Horn ..... 2</p> <p>Ball link ..... 4</p>	<p>2.6x40mm Pushrod ..... 2</p> <p>3x12mm Button Head Cap Screw ..... 4</p> <p>3mm Flat Washer ..... 4</p>	<p>3mm Lock Nut ..... 4</p> <p>4x15mm Button Head Cap Screw ..... 2</p> <p>4mm Flat Washer ..... 2</p> <p>Stabilizer struts ..... 2</p>	<p>Aluminium tube. Ø12mm 355mm</p> 	<p>17</p>
--	--	---	--	-----------

<p>Pinned Hinge ..... 4</p> <p>Ball link ..... 2</p> <p>2.6x1.100mm Pushrod ..... 1</p>	<p>Horn ..... 1</p> <p>3x12mm Button Head Cap Screw ..... 2</p> <p>3mm Flat Washer ..... 2</p>	<p>3mm Lock Nut ..... 2</p>	<p>Wing Struts ..... 8</p> 	<p>19</p>
<p>4</p> 			<p>4</p>	

<p>20</p> <p>3x6mm Button Head Cap Screw ..... 4</p> <p>44mm ..... 1</p> 	<p>6x25mm Plastic Screw ..... 2</p> <p>Plate of plywood ..... 2</p>	<p>Aluminium Ø12mm ..... 1</p> <p>100mm</p> <p>2000mm Wire ..... 1</p> <p>21</p>
--	---	--








**INSTALLING THE AILERONS AND FLAPS SERVOS OF HIGH WING**

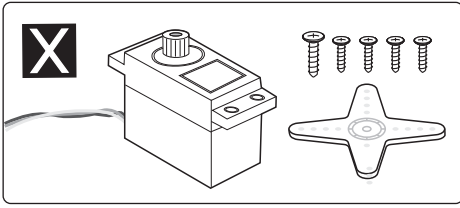

1. Install the rubber grommets and brass eyelets onto the aileron servos.
2. Using a modeling knife, remove the covering from over the pre-cut servo arm exit hole on the aileron servo tray / hatch. This hole will allow the servo arm to pass through when installing the aileron pushrods.
3. Place the servo into the servo tray. Center the servo within the tray and drill 1.5mm pilot holes through the block of wood for each of the four mounting screws provided with the servo.

5. Place the servo into the servo tray/ hatch into the servo box on the bottom of the wing and drill 1.5mm pilot holes through the tray and servo box for each of the four mounting screws. Secure the servo tray in place using the mounting screws provided.
4. Using the thread as a guide and using masking tape, tape the servo lead to the end of the thread: carefully pull the thread out. When you have pulled the servo lead out, remove the masking tape and the servo lead from the thread.
6. Repeat step # 2 - # 5 to install the second aileron servo in the opposite wing half.

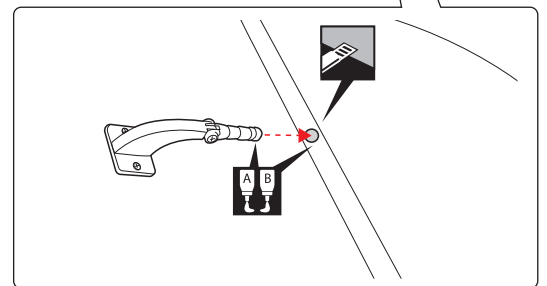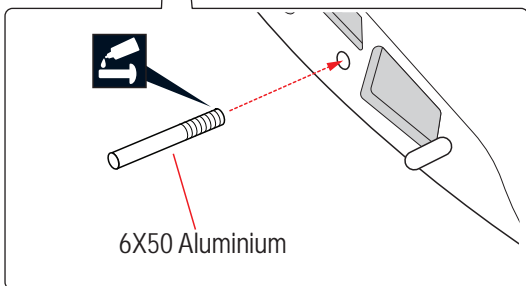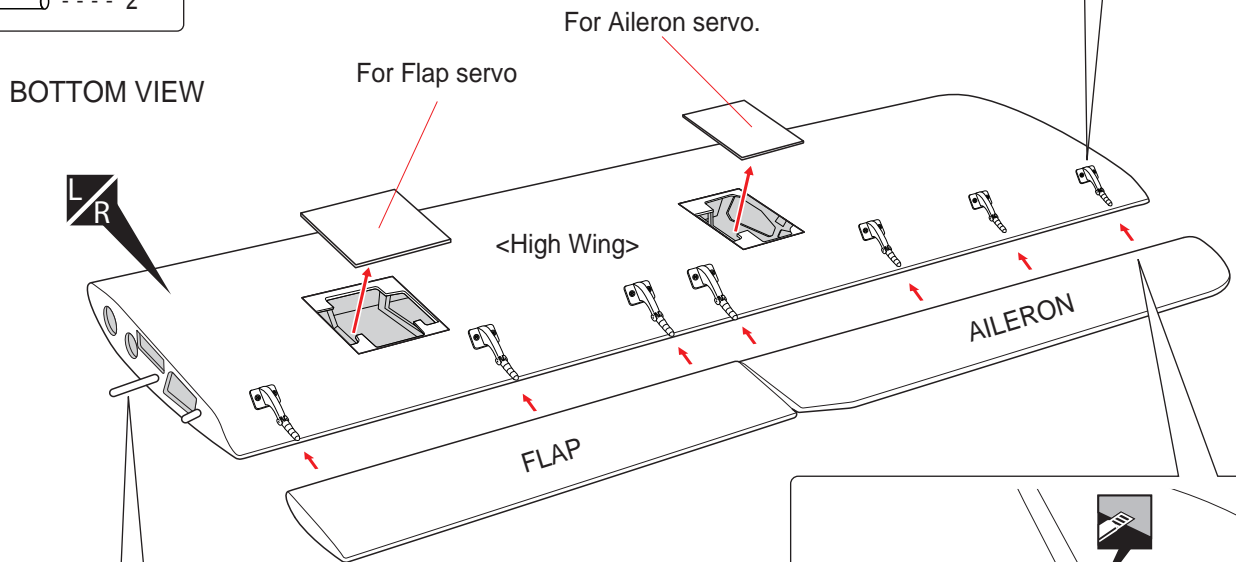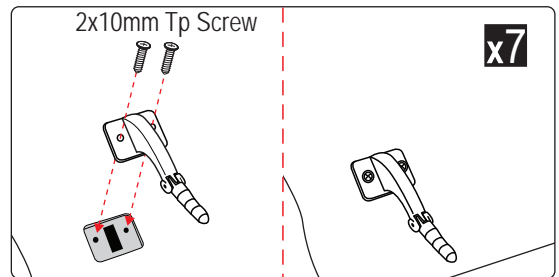


**x7** The number of times the same way Assembly (in this case seven times).

Assemble left and right sides the same way.

Cut off shaded portion carefully.

Apply epoxy glue.

Apply threadlocker (screw cement).

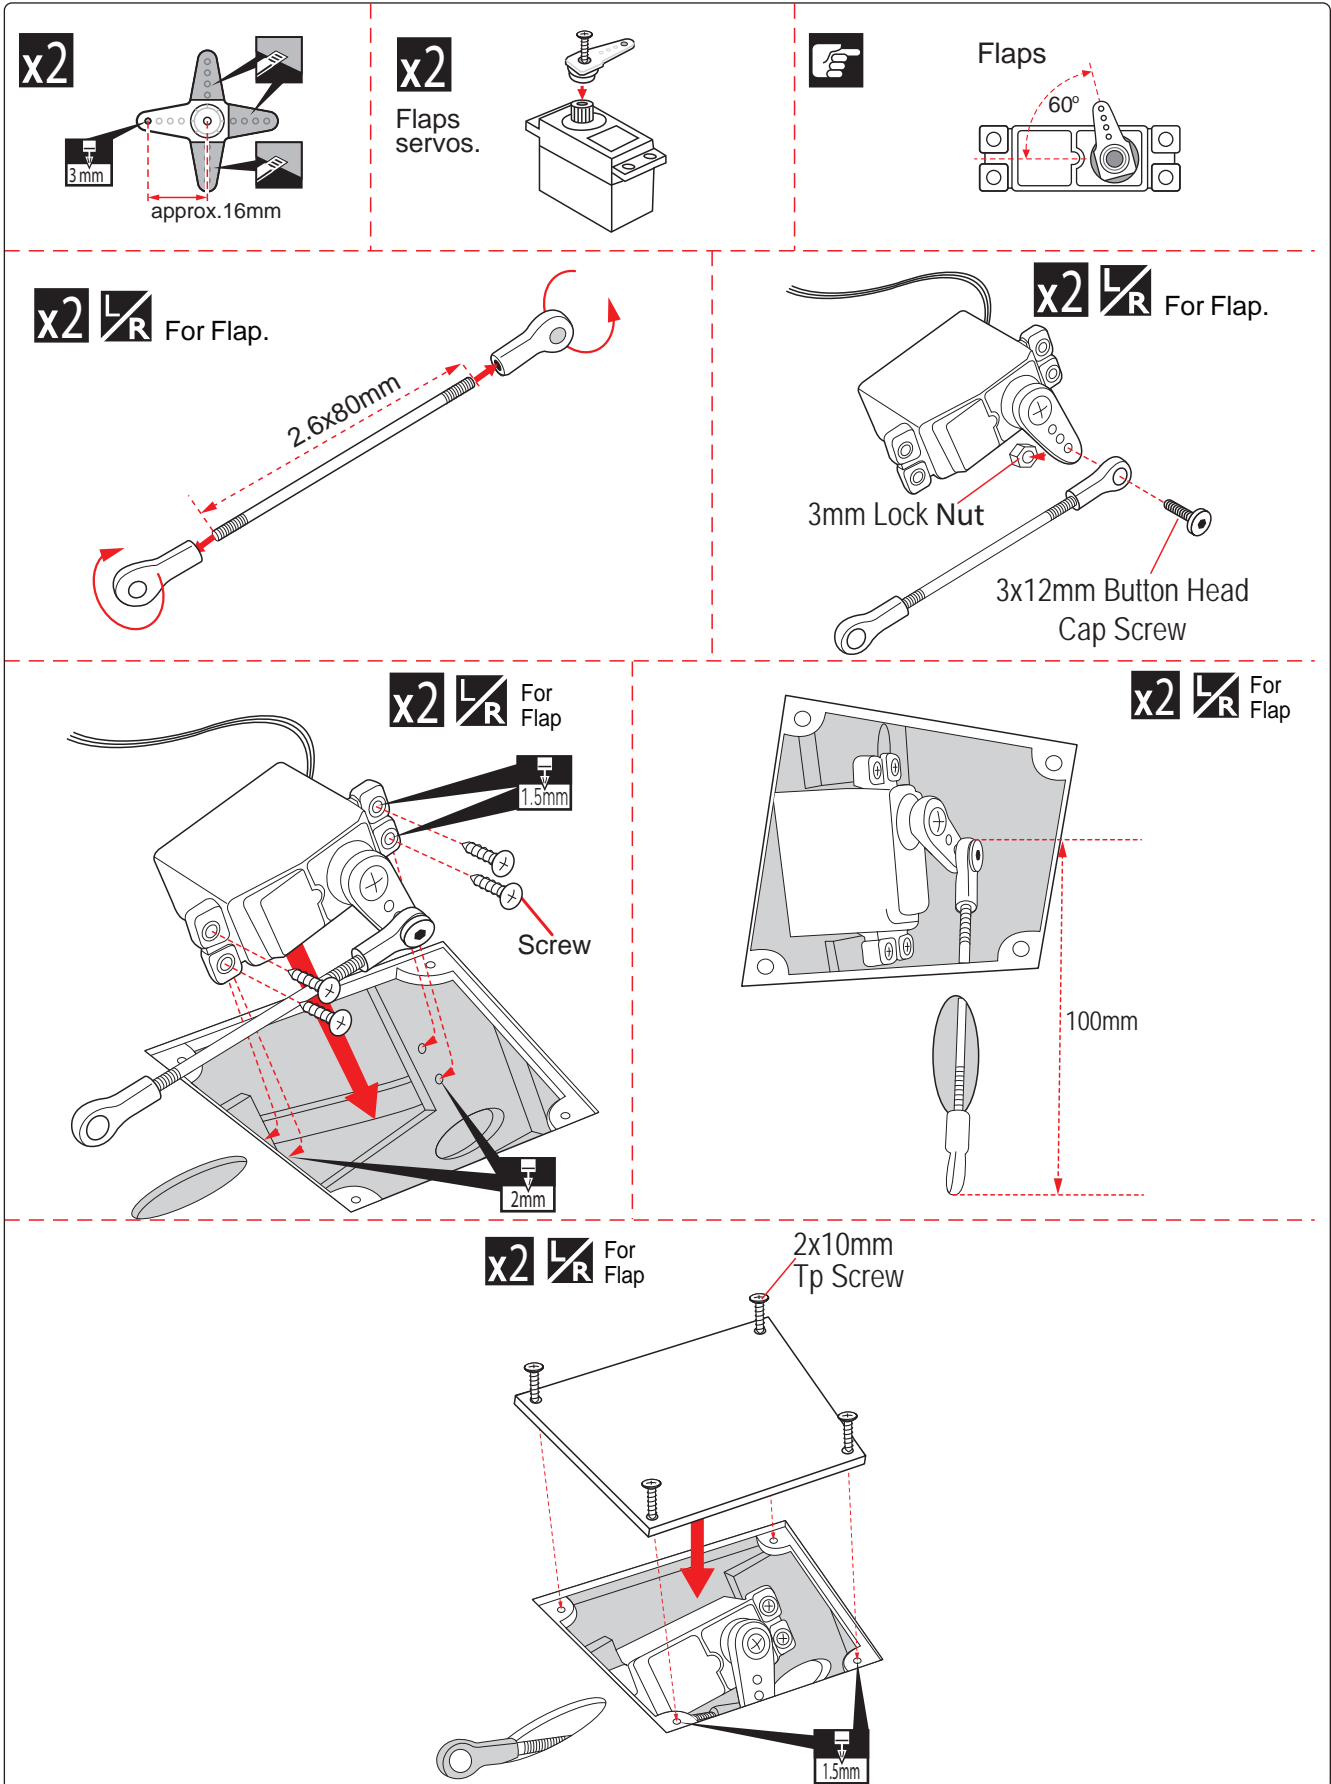

Cut off shaded portion carefully.

Drill holes using the stated. (in this case 3mmØ, 2mmØ, 1.5mmØ).

Pay close attention here.

**x2** The number of times the same way Assembly (in this case twice).

Assemble left and right sides the same way.

**x2** 3mm approx. 16mm

**x2** Aileron servos.

Aileron 90°

**x2** **L/R** Aileron 2.6x85mm

**x2** **L/R** Aileron 3mm Lock Nut 3x12mm Button Head Cap Screw

**x2** **L/R** Aileron 1.5mm Screw 2mm

**x2** **L/R** Aileron 100mm

**x2** **L/R** Aileron 2x10mm Tp Screw 1.5mm









Cut off shaded portion carefully.

Drill holes using the stated. (in this case 3mmØ, 2mmØ, 1.5mmØ).

Pay close attention here.

**x2** The number of times the same way Assembly (in this case twice).

**L/R** Assemble left and right sides the same way.


Ball link  ----- 8	2.6x80mm Push rod  ----- 2	3x12mm Button Head Cap Screw  ----- 8	3mm Lock Nut  ----- 8
2.6x85mm Push rod  ----- 2	Horn  ----- 4	3mm Flat washer  ----- 4	2x10mm Tp Screw  ----- 16



Warning!


▶ Set all screws securely. If they come off during flight you will lose control of your aircraft!

BOTTOM VIEW

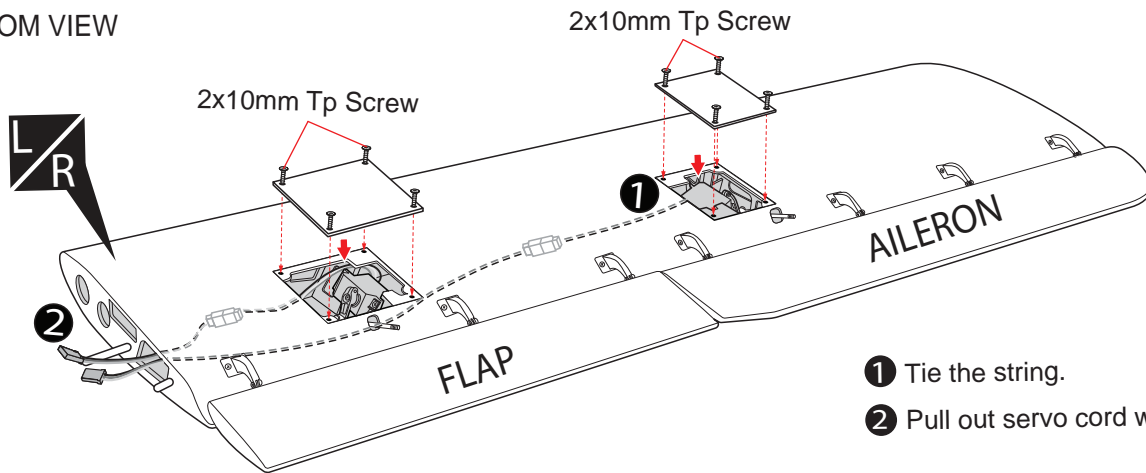


- 1 Tie the string.
- 2 Pull out servo cord with string.



BOTTOM VIEW

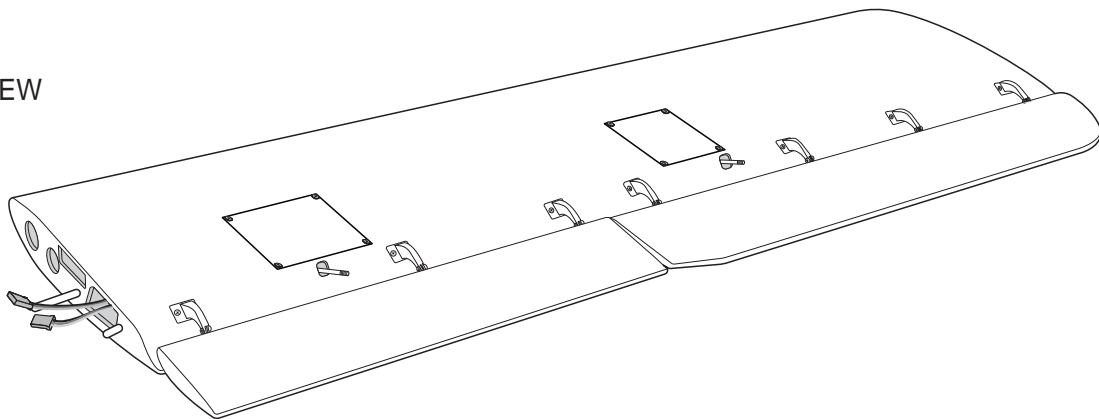

BOTTOM VIEW

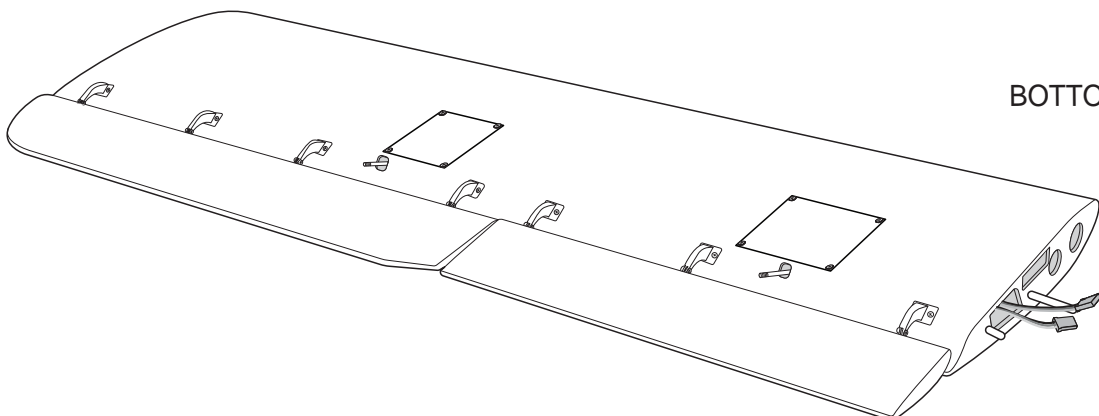



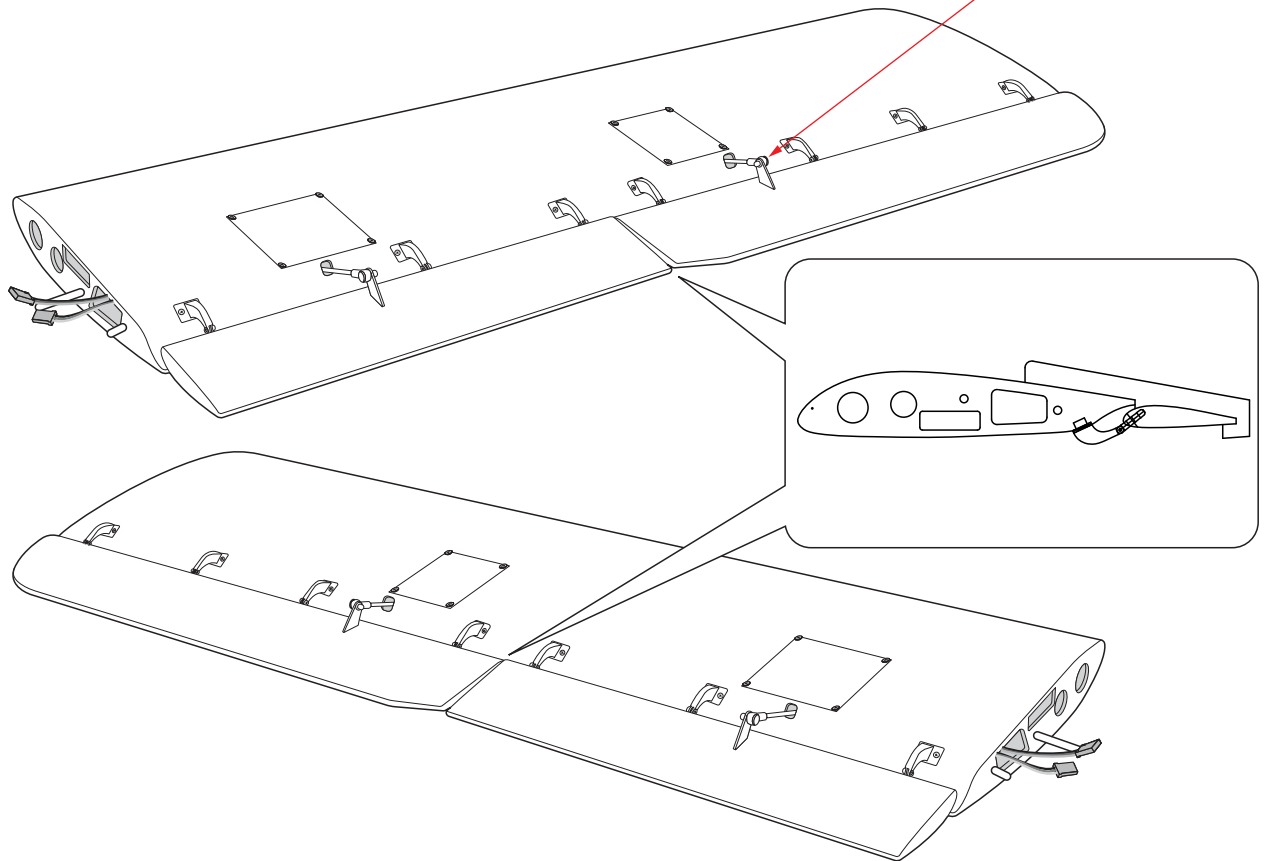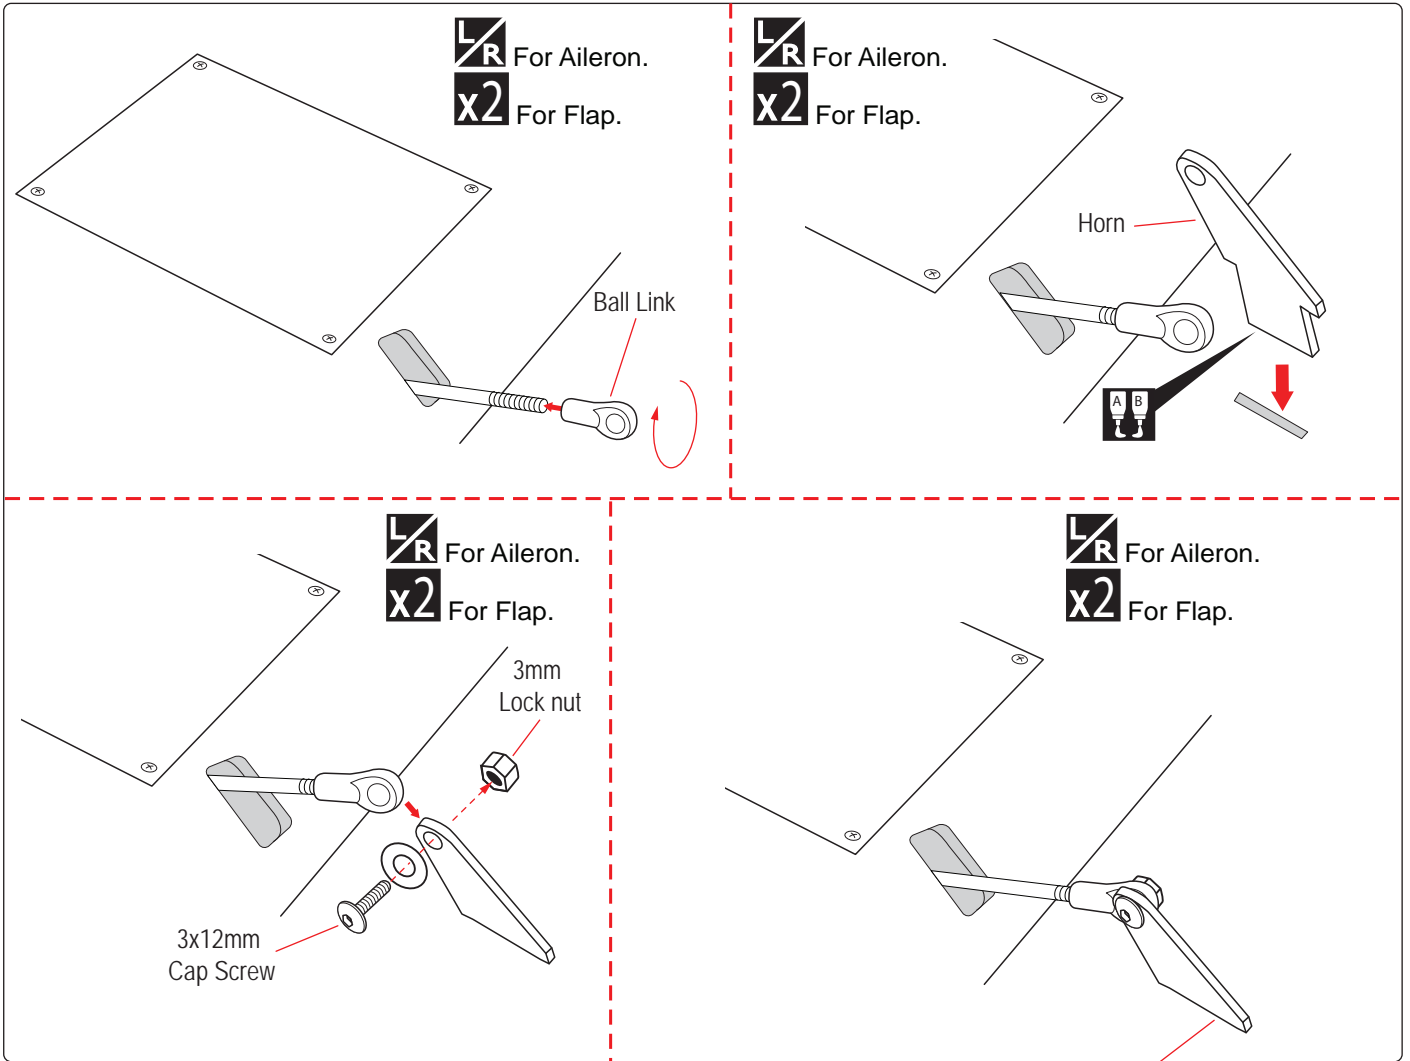


**A B** Apply epoxy glue.


**L/R** Assemble left and right sides the same way.

**x2** The number of times the same way Assembly (in this case twice).


**INSTALLING THE AILERONS AND FLAPS SERVOS OF LOW WING**

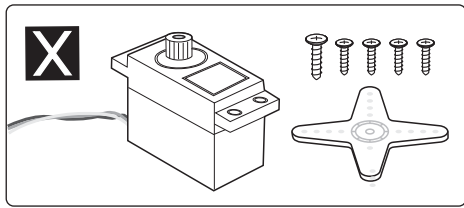



1. Install the rubber grommets and brass eyelets onto the aileron servos.
2. Using a modeling knife, remove the covering from over the pre-cut servo arm exit hole on the aileron servo tray / hatch. This hole will allow the servo arm to pass through when installing the aileron pushrods.
3. Place the servo into the servo tray. Center the servo within the tray and drill 1.5mm pilot holes through the block of wood for each of the four mounting screws provided with the servo.



BOTTOM VIEW

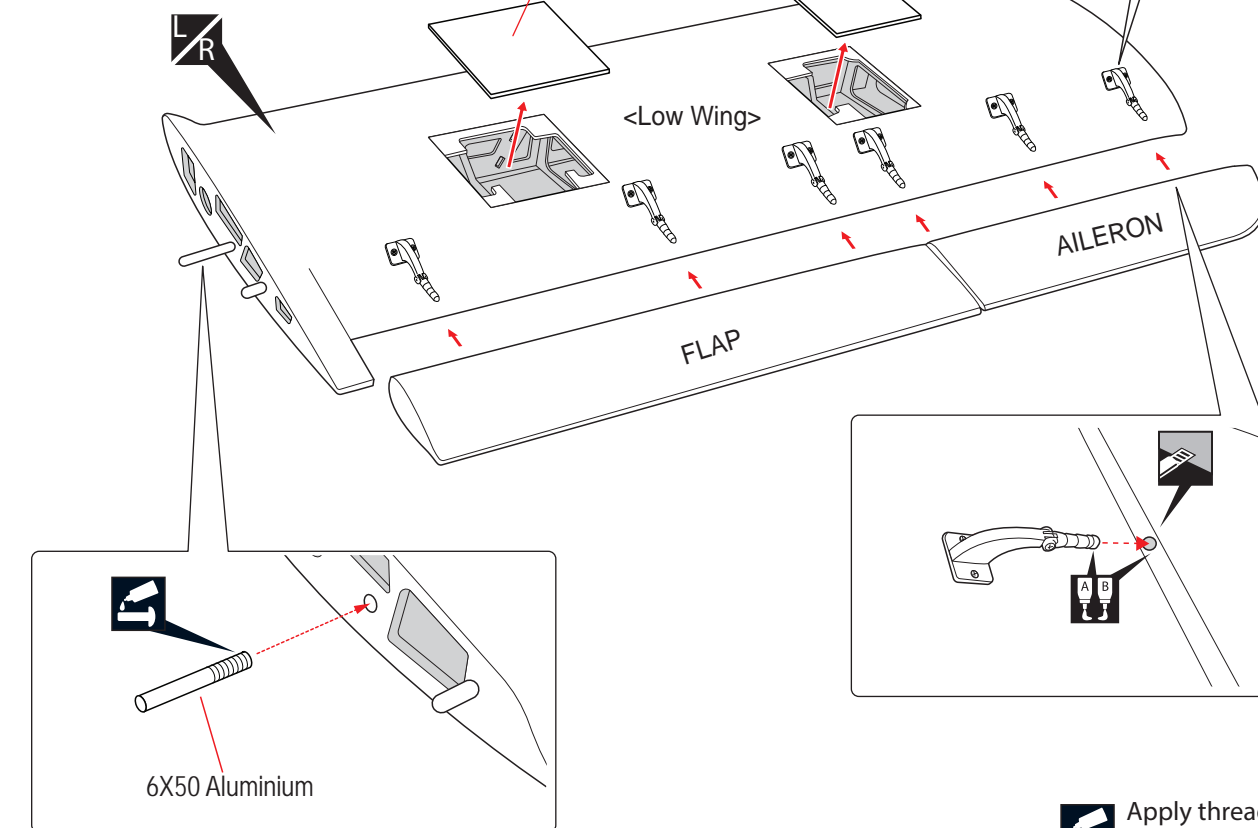


5. Place the servo into the servo tray/ hatch into the servo box on the bottom of the wing and drill 1.5mm pilot holes through the tray and servo box for each of the four mounting screws. Secure the servo tray in place using the mounting screws provided.
4. Using the thread as a guide and using masking tape, tape the servo lead to the end of the thread: carefully pull the thread out. When you have pulled the servo lead out, remove the masking tape and the servo lead from the thread.
6. Repeat step # 2 - # 5 to install the second aileron servo in the opposite wing half.

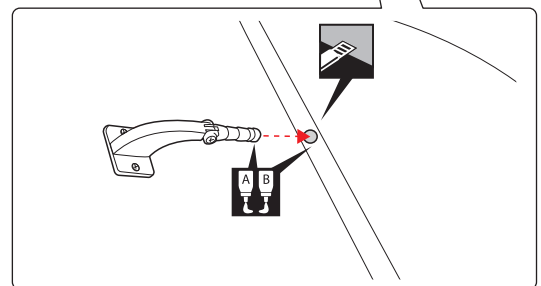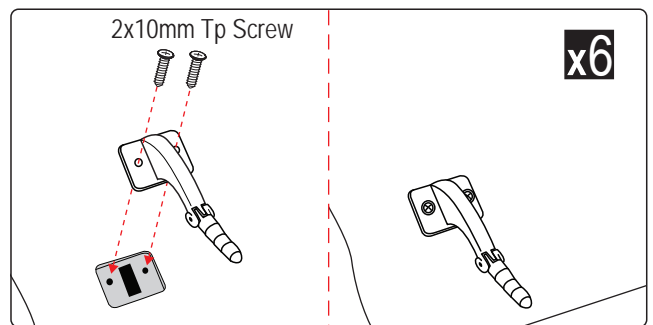

Apply threadlocker (screw cement).

The number of times the same way Assembly (in this case six times).

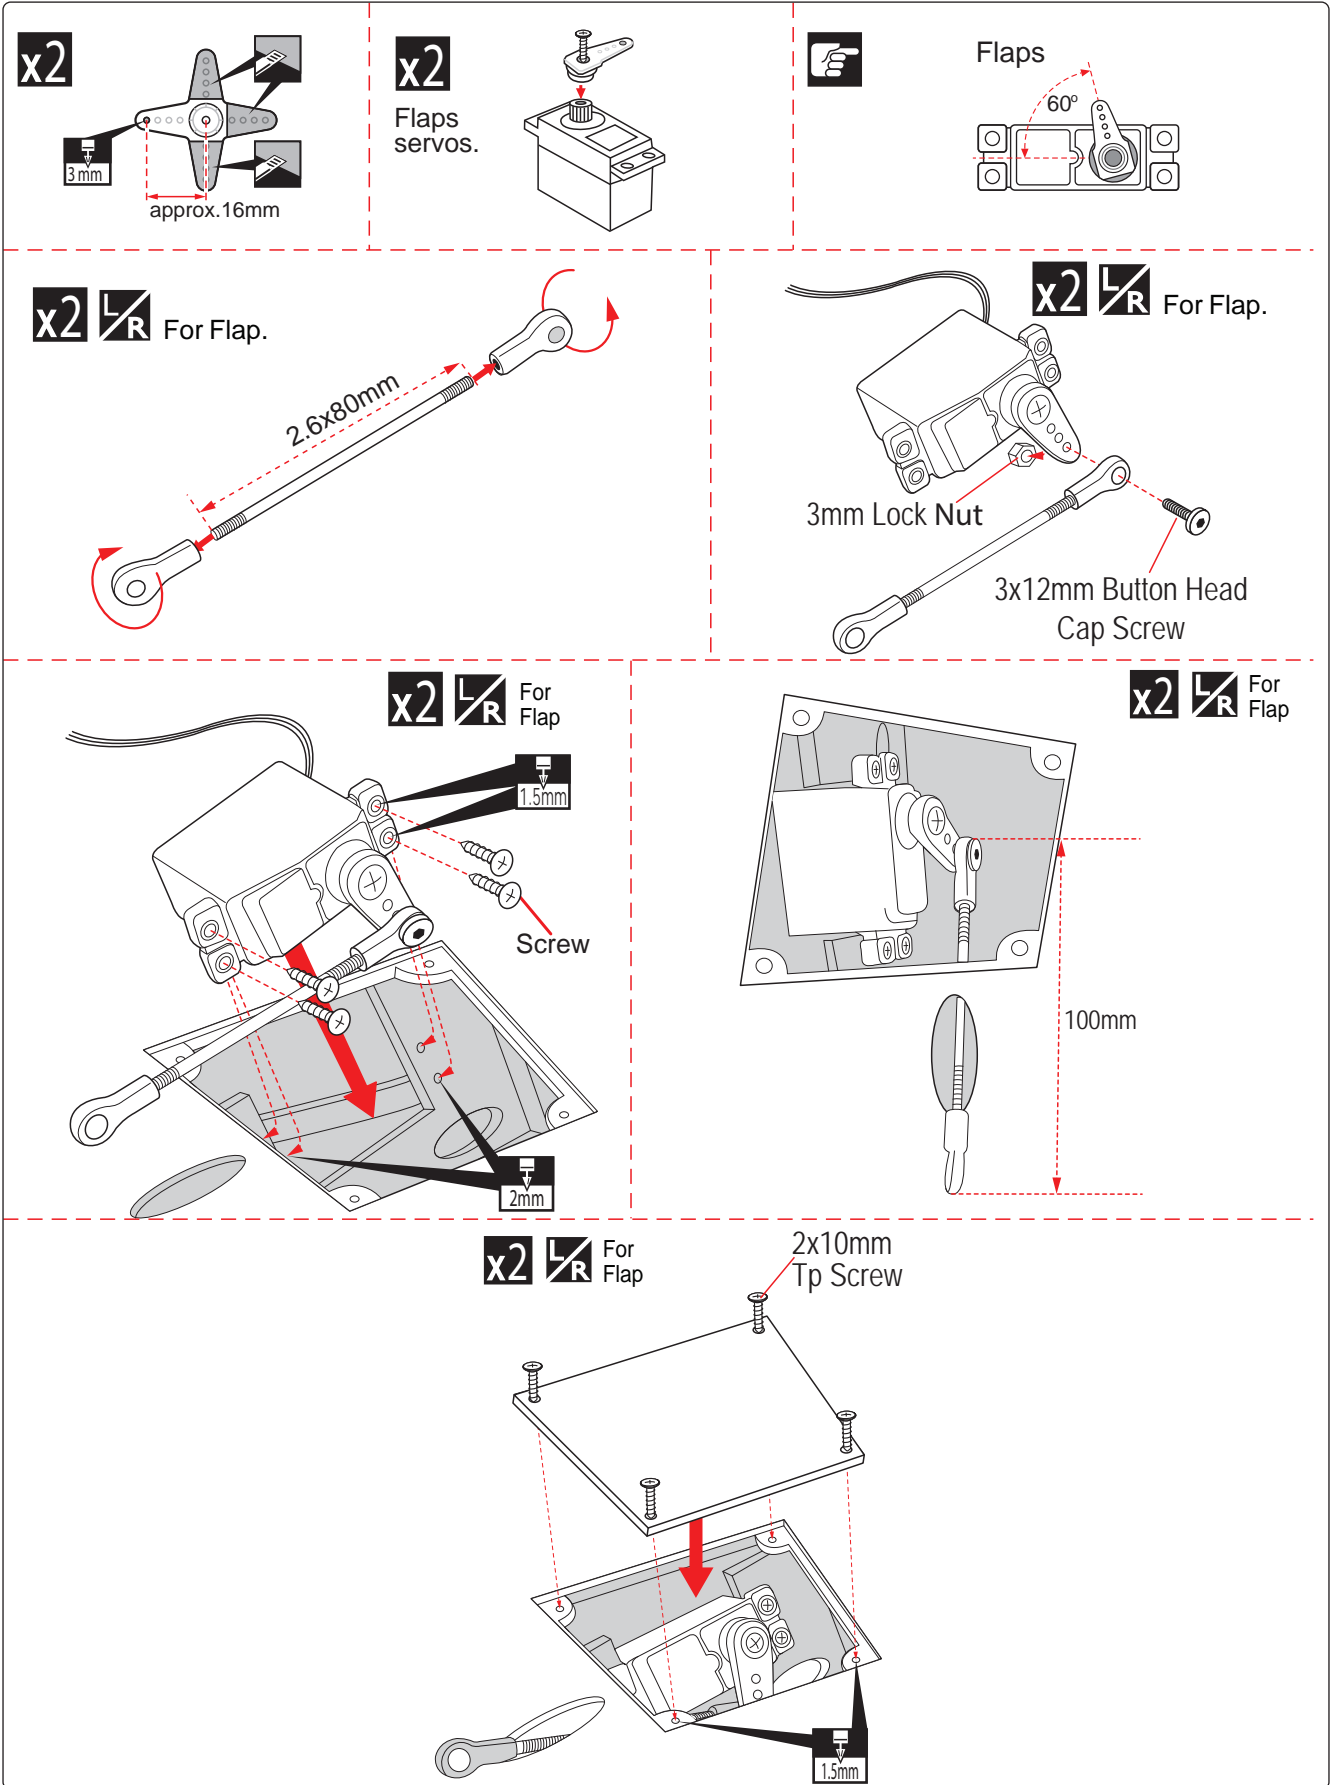


Cut off shaded portion carefully.

Drill holes using the stated. (in this case 3mmØ, 2mmØ, 1.5mmØ).

Pay close attention here.

**x2** The number of times the same way Assembly (in this case twice).

Assemble left and right sides the same way.

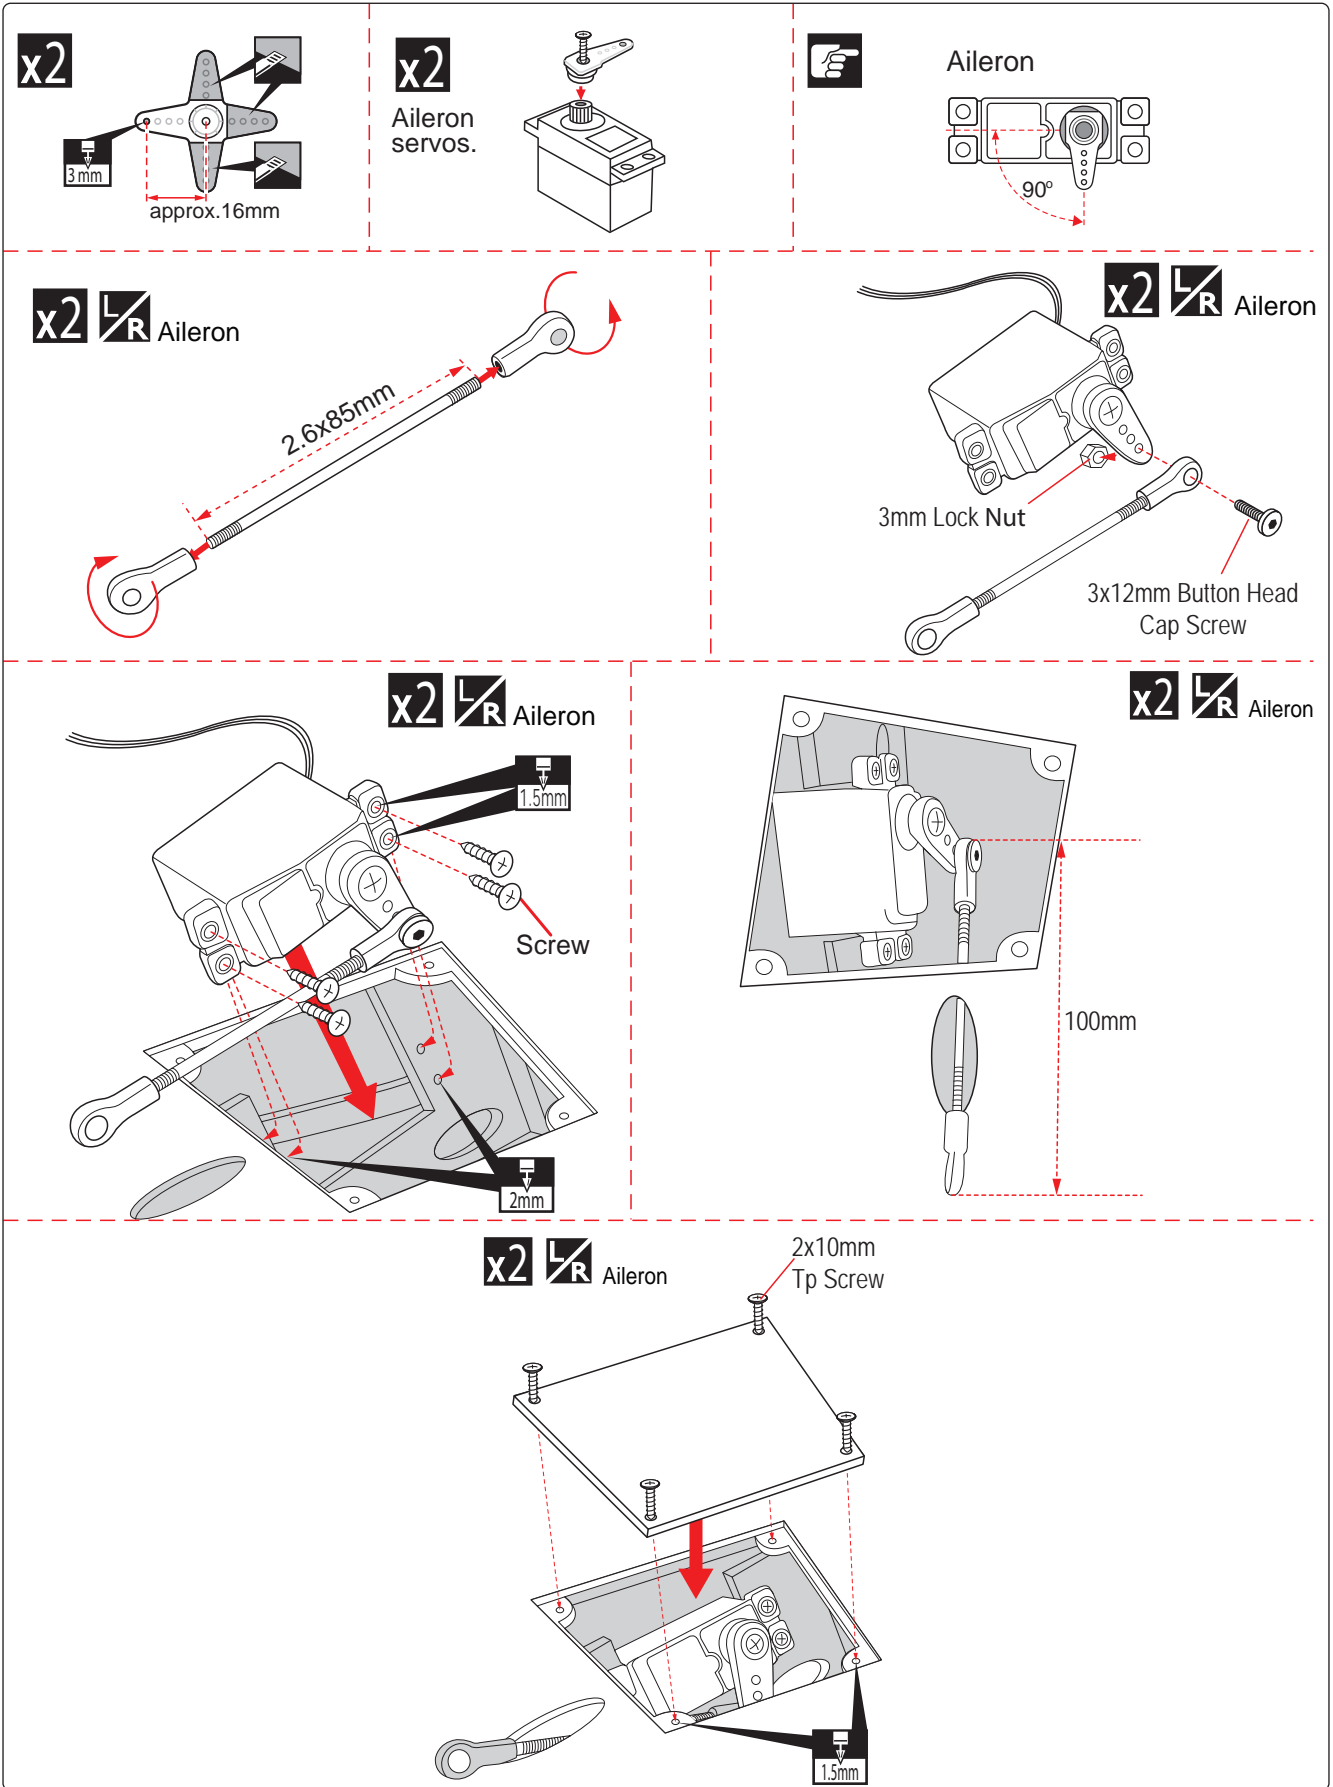

Cut off shaded portion carefully.









Drill holes using the stated. (in this case 3mmØ, 2mmØ, 1.5mmØ).

Pay close attention here.

**x2** The number of times the same way Assembly (in this case twice).

**L/R** Assemble left and right sides the same way.




Ball link  ----- 8	2.6x80mm Push rod  ----- 2	3x12mm Button Head Cap Screw  ----- 8	3mm Lock Nut  ----- 8
2.6x85mm Push rod  ----- 2	Horn  ----- 4	3mm Flat washer  ----- 4	2x10mm Tp Screw  ----- 16



Warning!


▶ Set all screws securely. If they come off during flight you will lose control of your aircraft!

BOTTOM VIEW

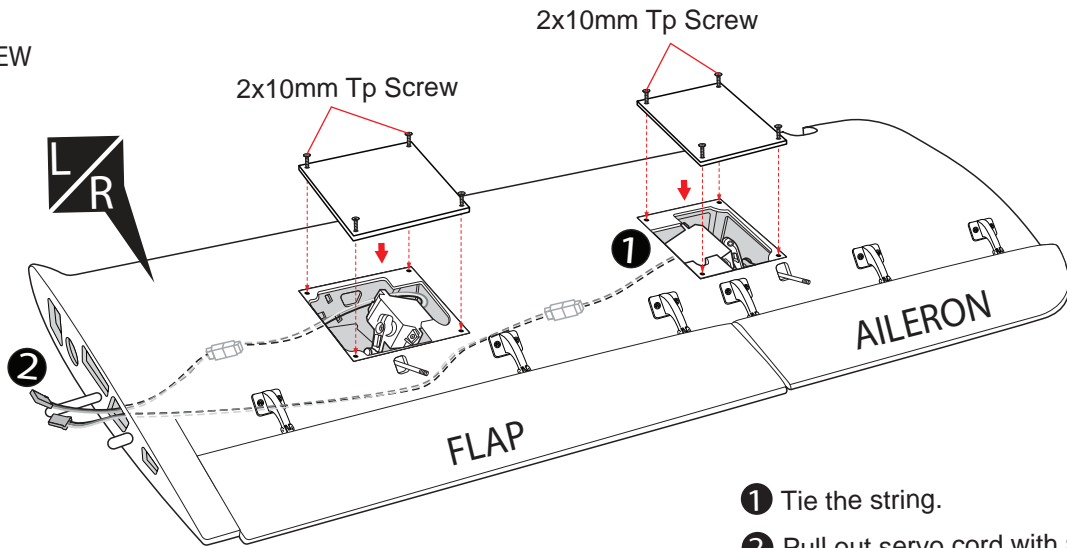



- ① Tie the string.
- ② Pull out servo cord with string.



BOTTOM VIEW

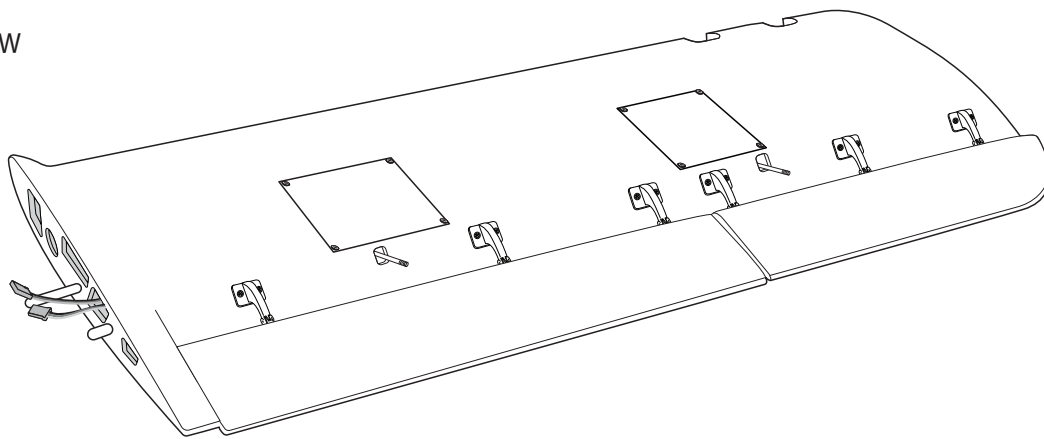

BOTTOM VIEW

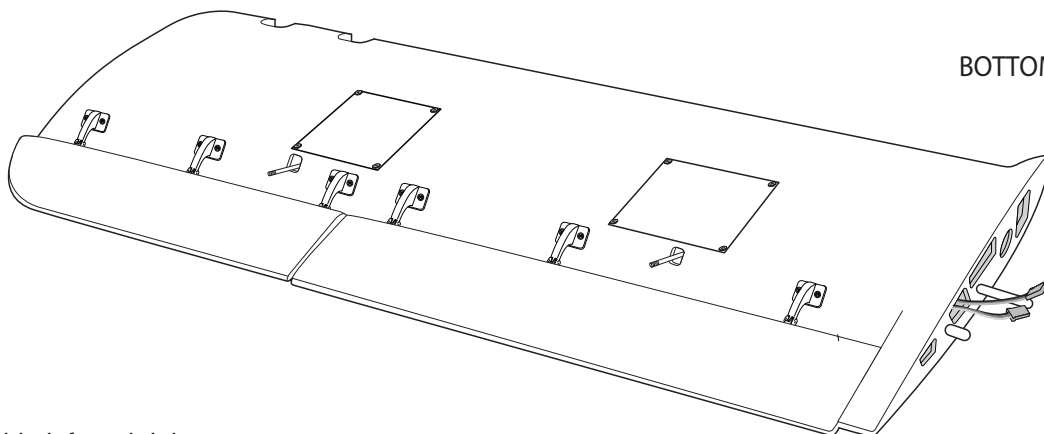

 Assemble left and right sides the same way.

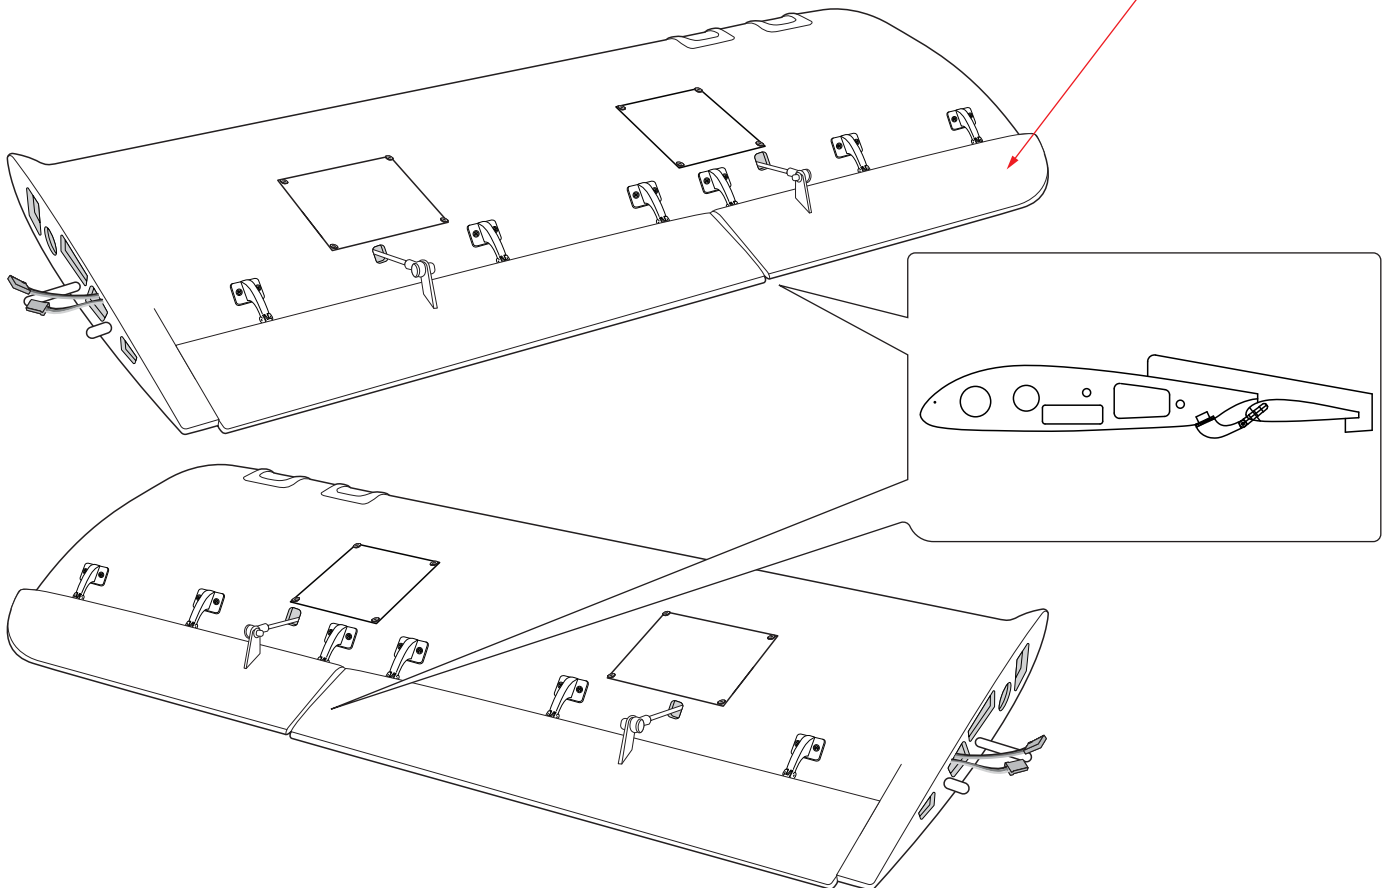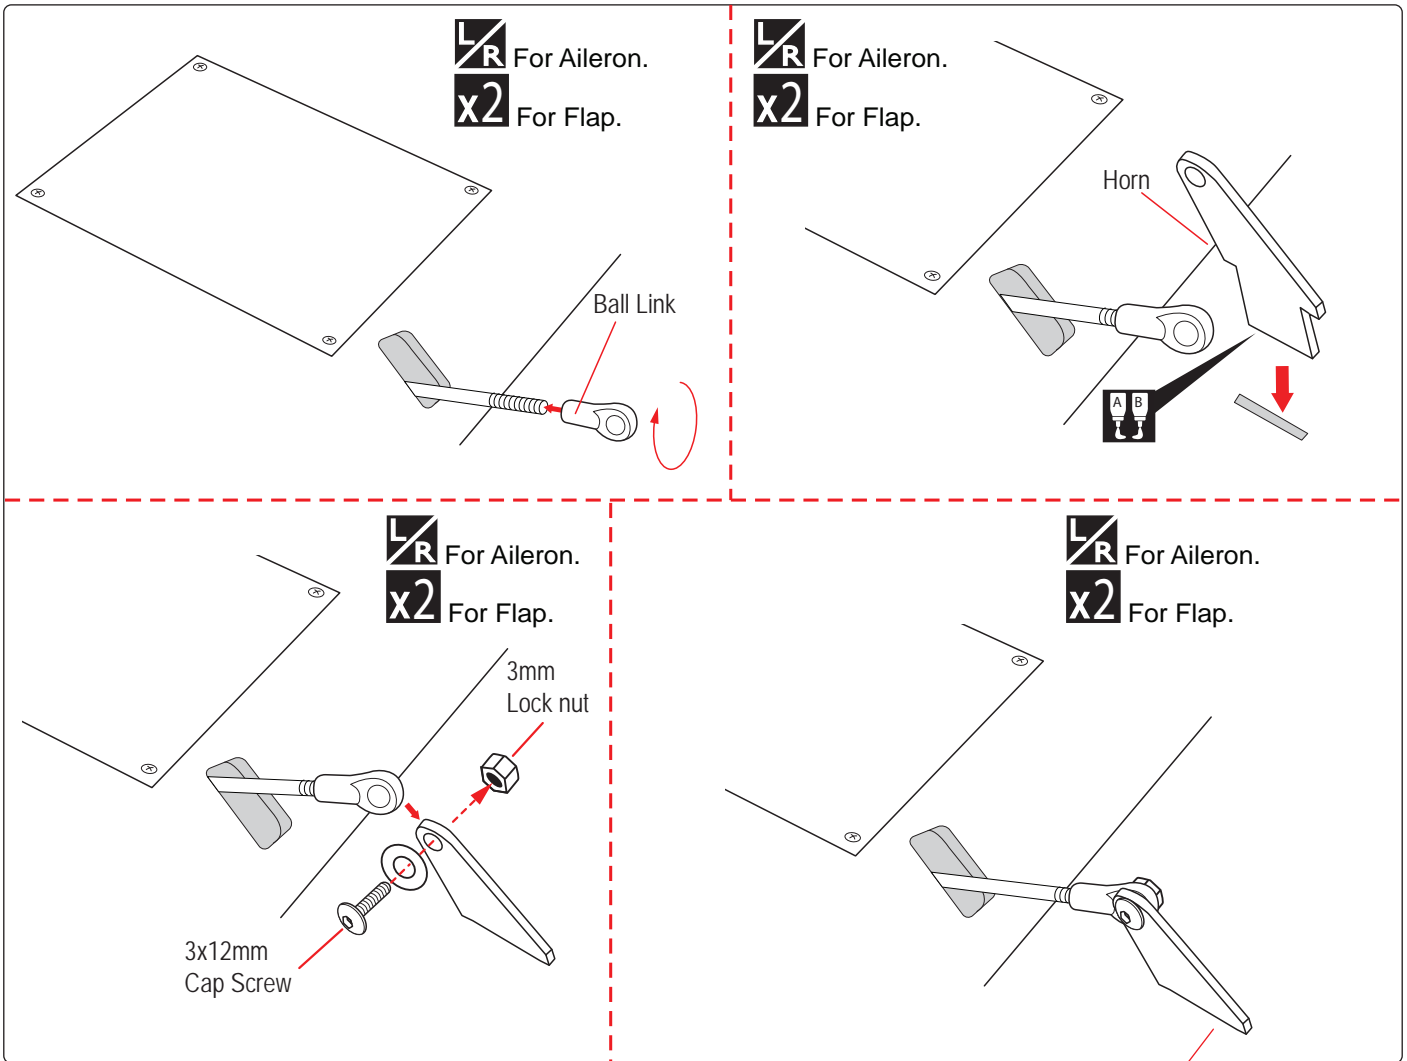

Apply epoxy glue.









Assemble left and right sides the same way.










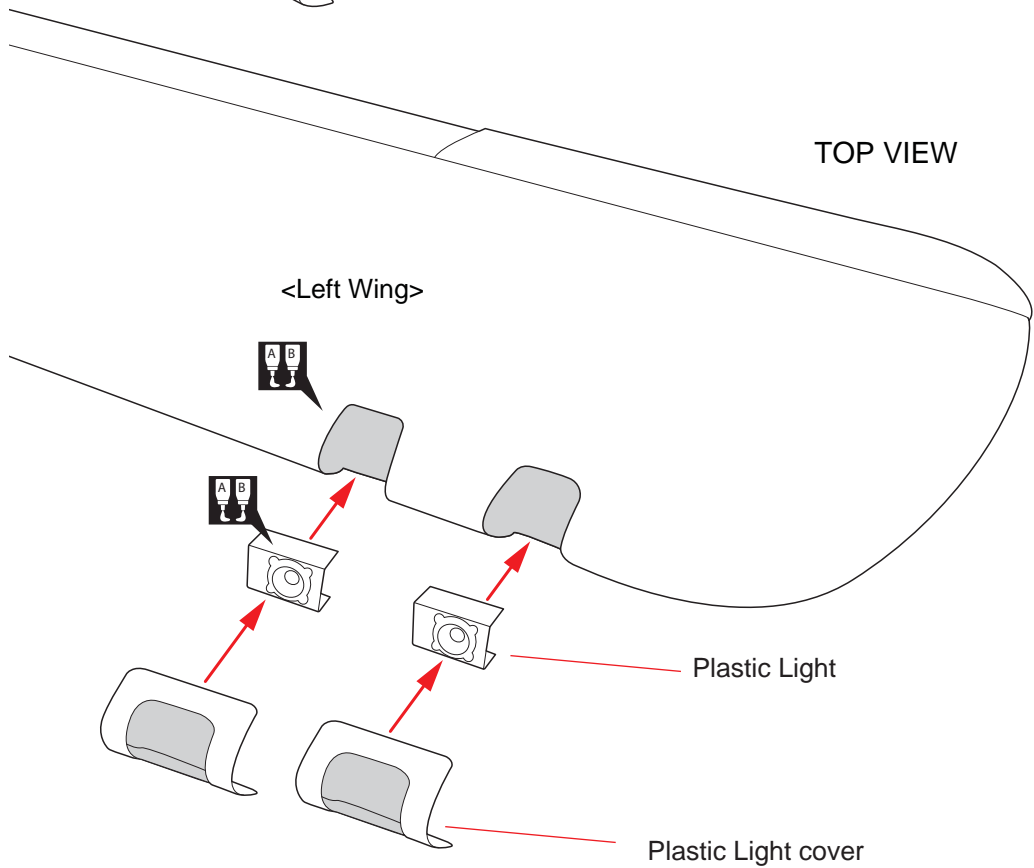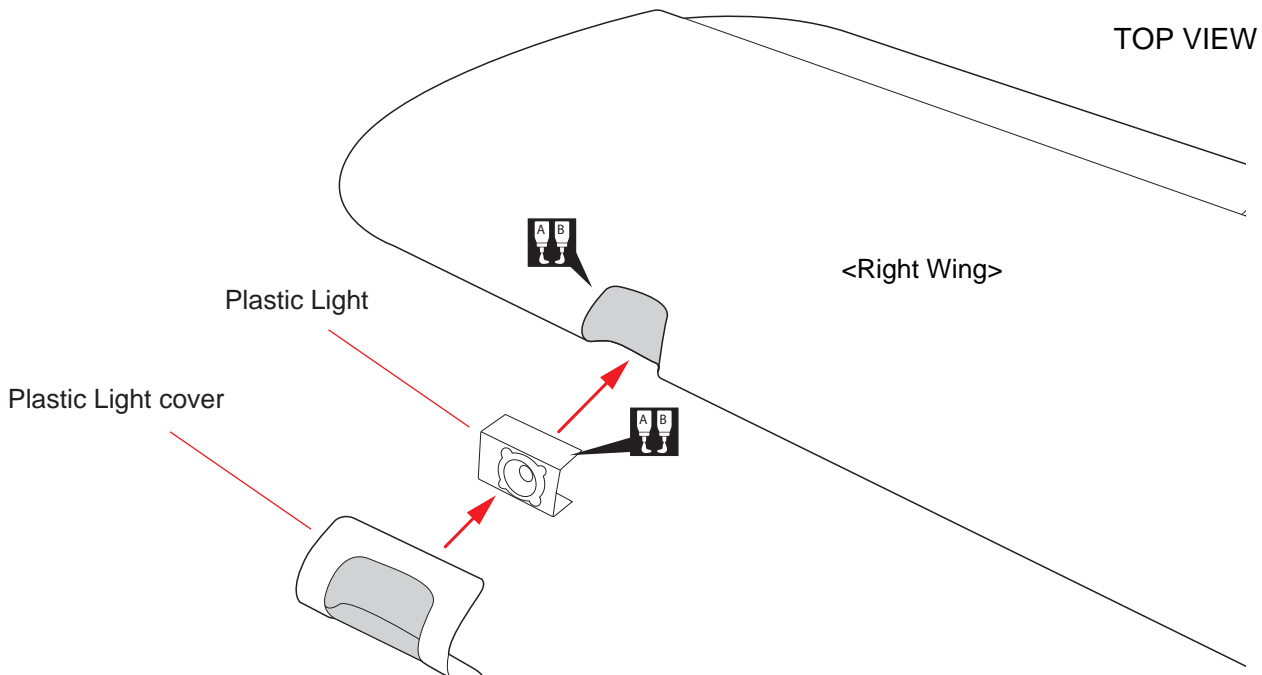

The number of times the same way Assembly (in this case twice).

**INSTALLING THE LOW WING PLASTIC LIGHT**



Right Wing	Left Wing
Plastic Light  ..... 1	Plastic Light  ..... 2
Plastic Light cover  ..... 1	Plastic Light cover  ..... 2




**INSTALLING THE MAIN GEAR**

- |   |  |
|---|--|
| 5x55mm Socket Head Cap Screw<br> ----- 2 | 4x15mm Button Head Cap Screw<br> ----- 6        |
| 5X16mm Flat Washer<br> ----- 2           | 4mm Flat Washer<br> ----- 4                     |
| 4x25mm Socket Head Cap Screw<br> ----- 4 | 4mm Lock Nut<br> ----- 6                        |
| 4mm Spring Washer<br> ----- 8            | Aluminium Fuselage Strut Attachment<br> ----- 2 |
| 4x10mm Socket Head Cap Screw<br> ----- 4 |  |


Aluminium main landing gear

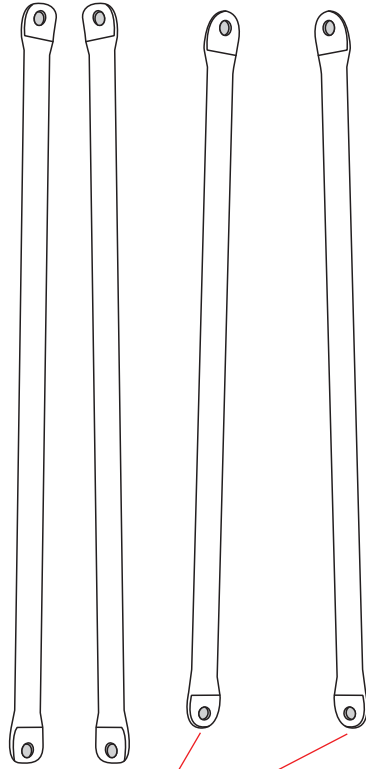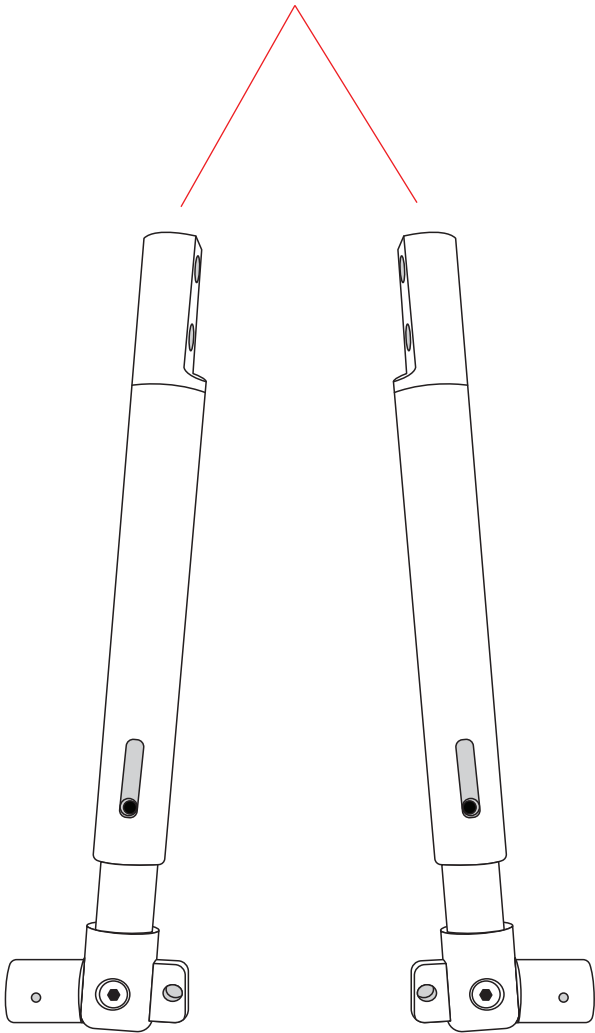

Aluminium Landing gear struts

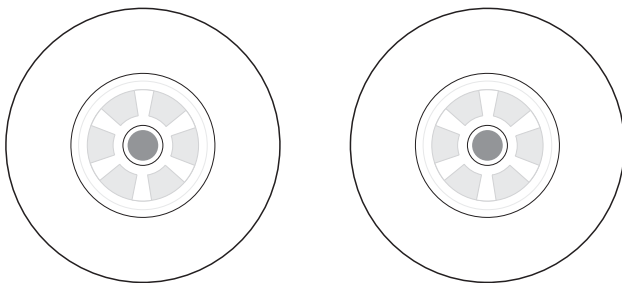


127mm Wheels

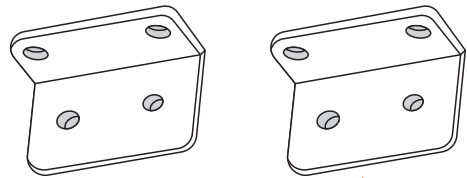


Aluminium Fuselage Strut Attachment


BOTTOM VIEW

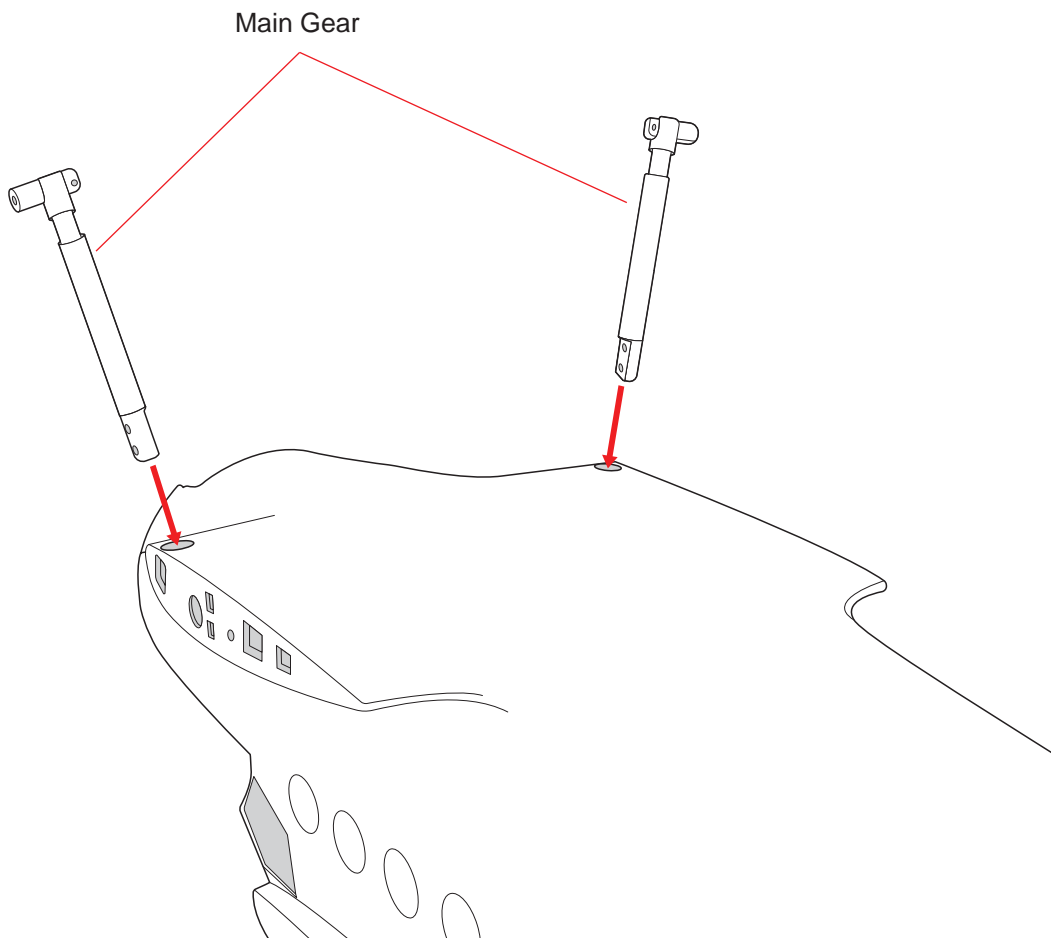


BOTTOM VIEW

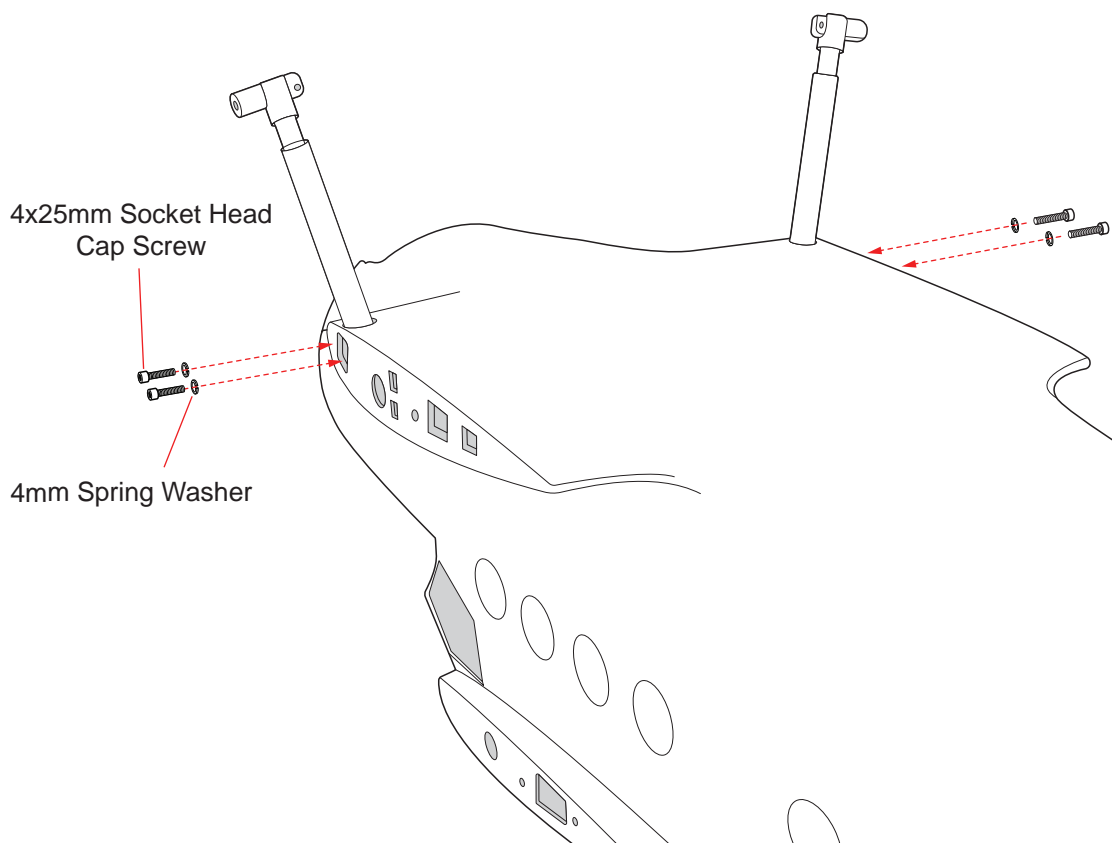

BOTTOM VIEW

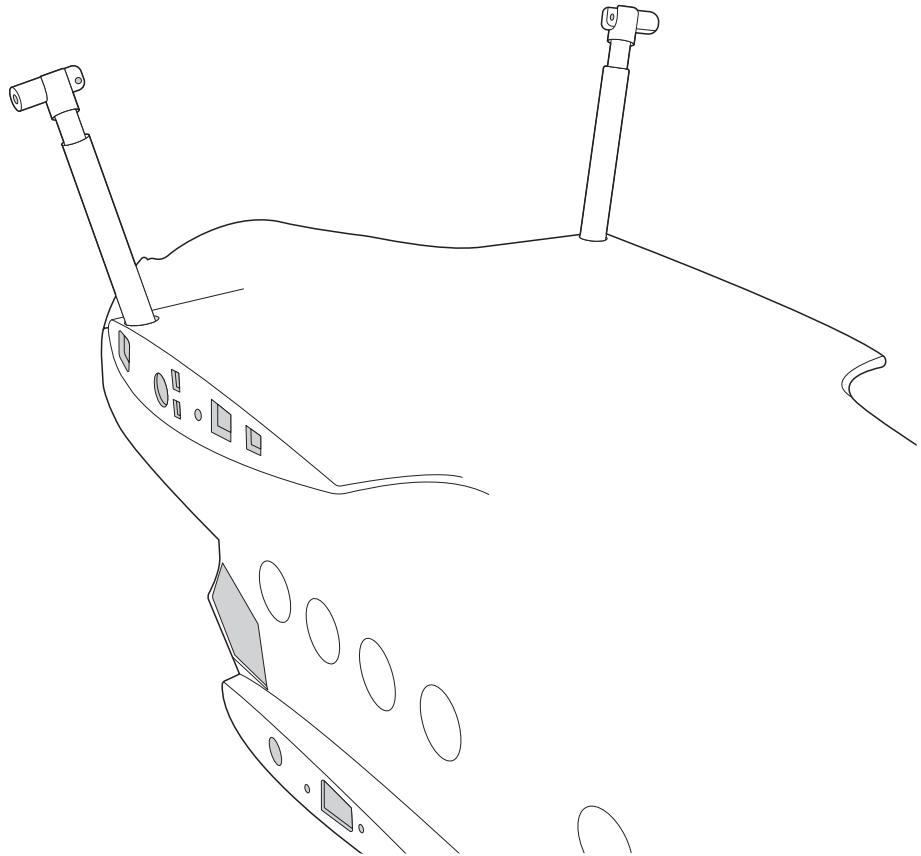


BOTTOM VIEW

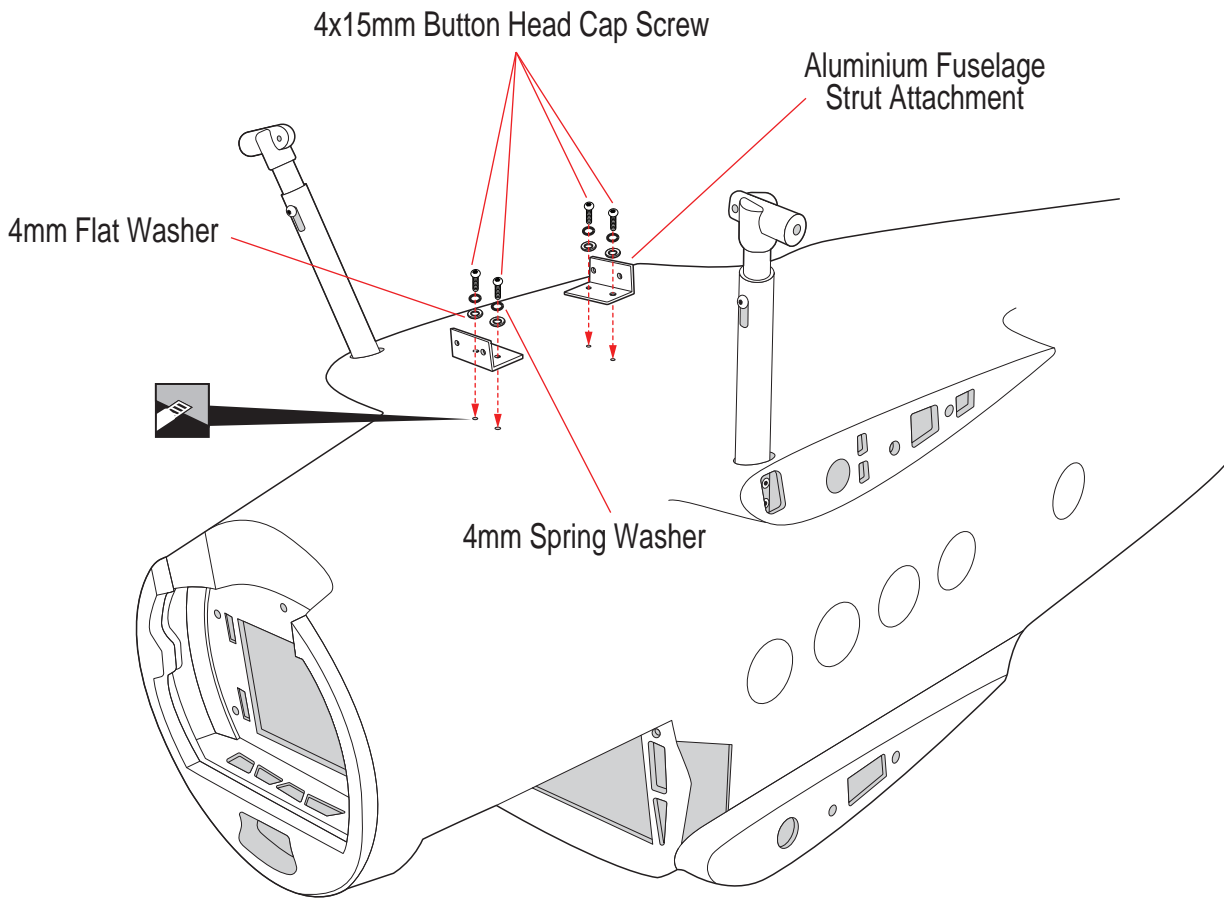





BOTTOM VIEW

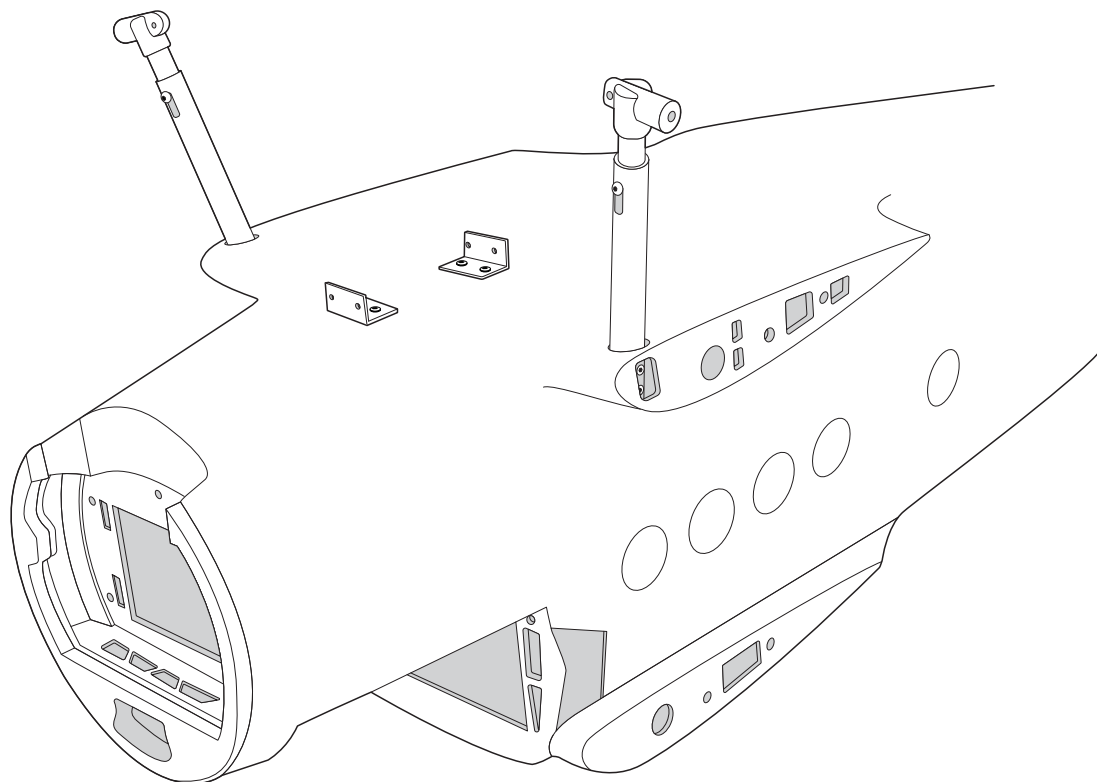


BOTTOM VIEW

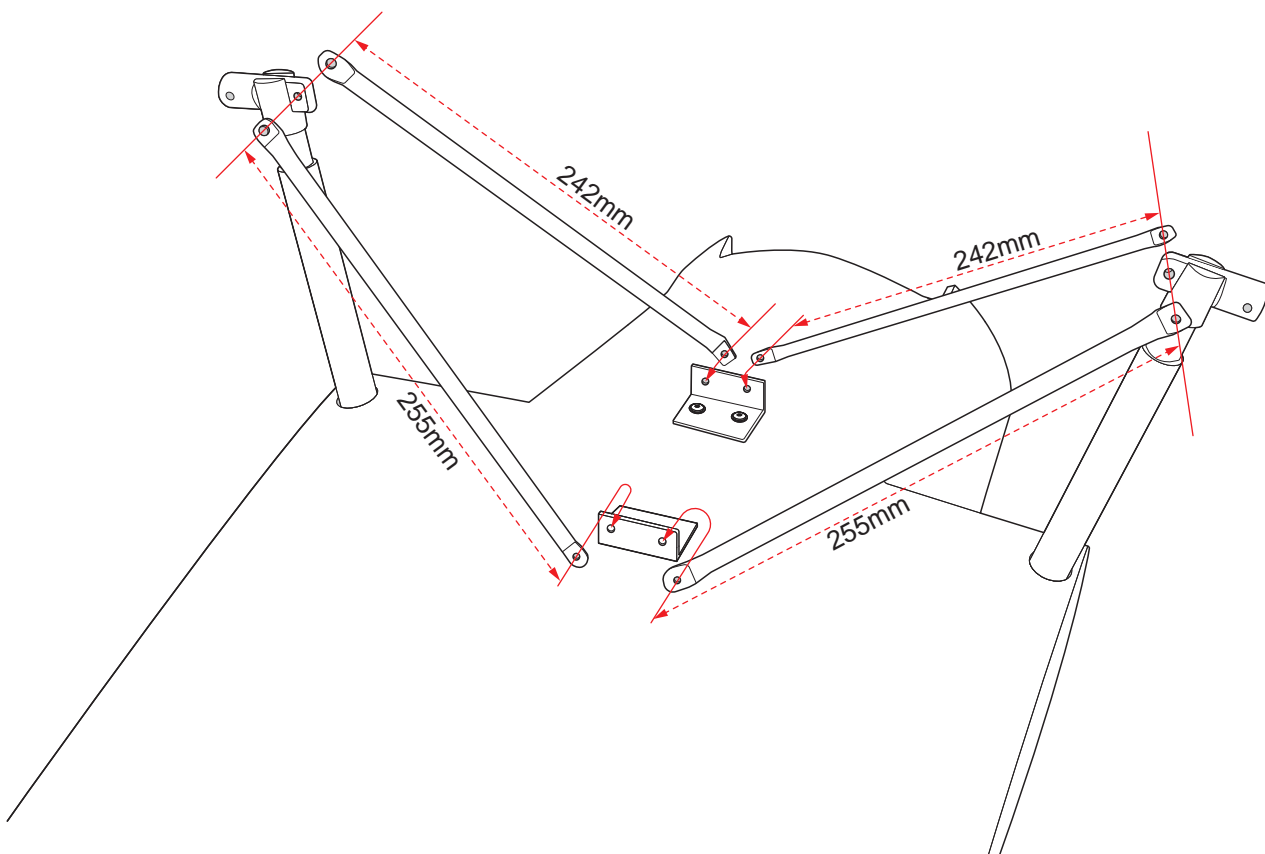


BOTTOM VIEW

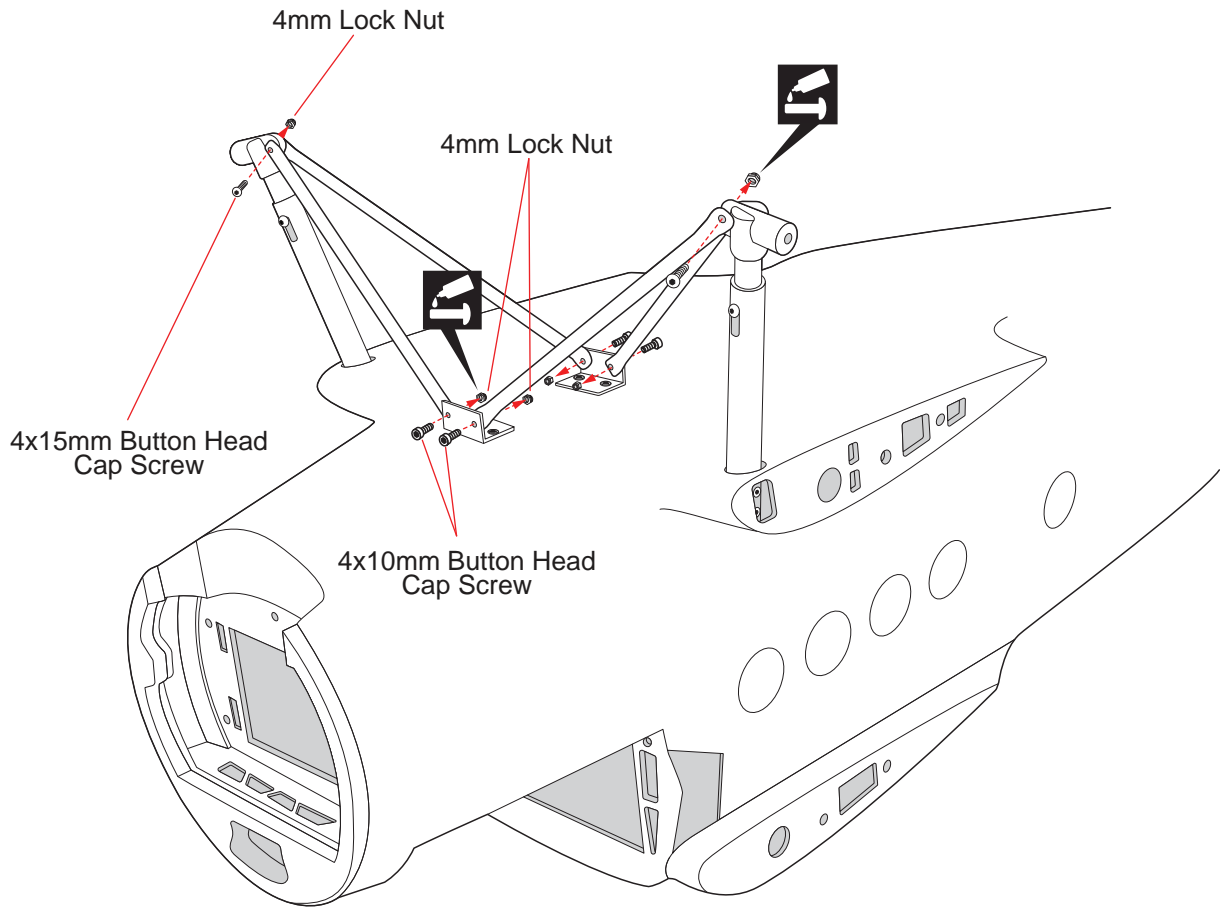


BOTTOM VIEW

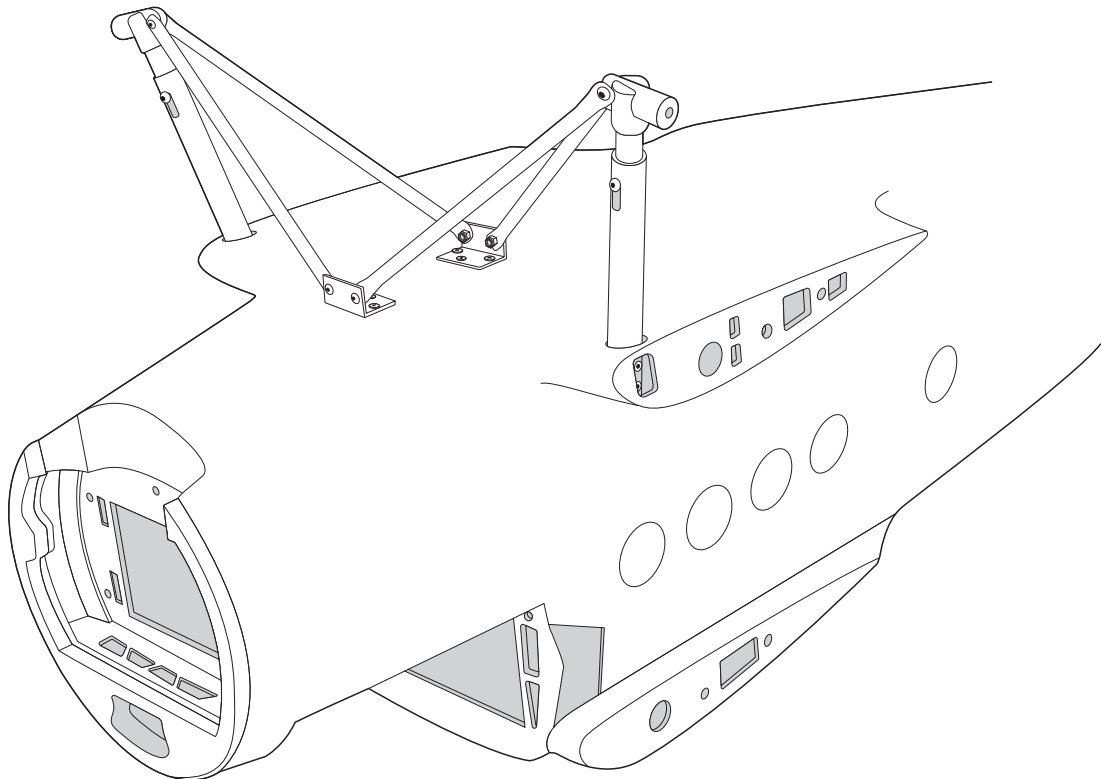


BOTTOM VIEW

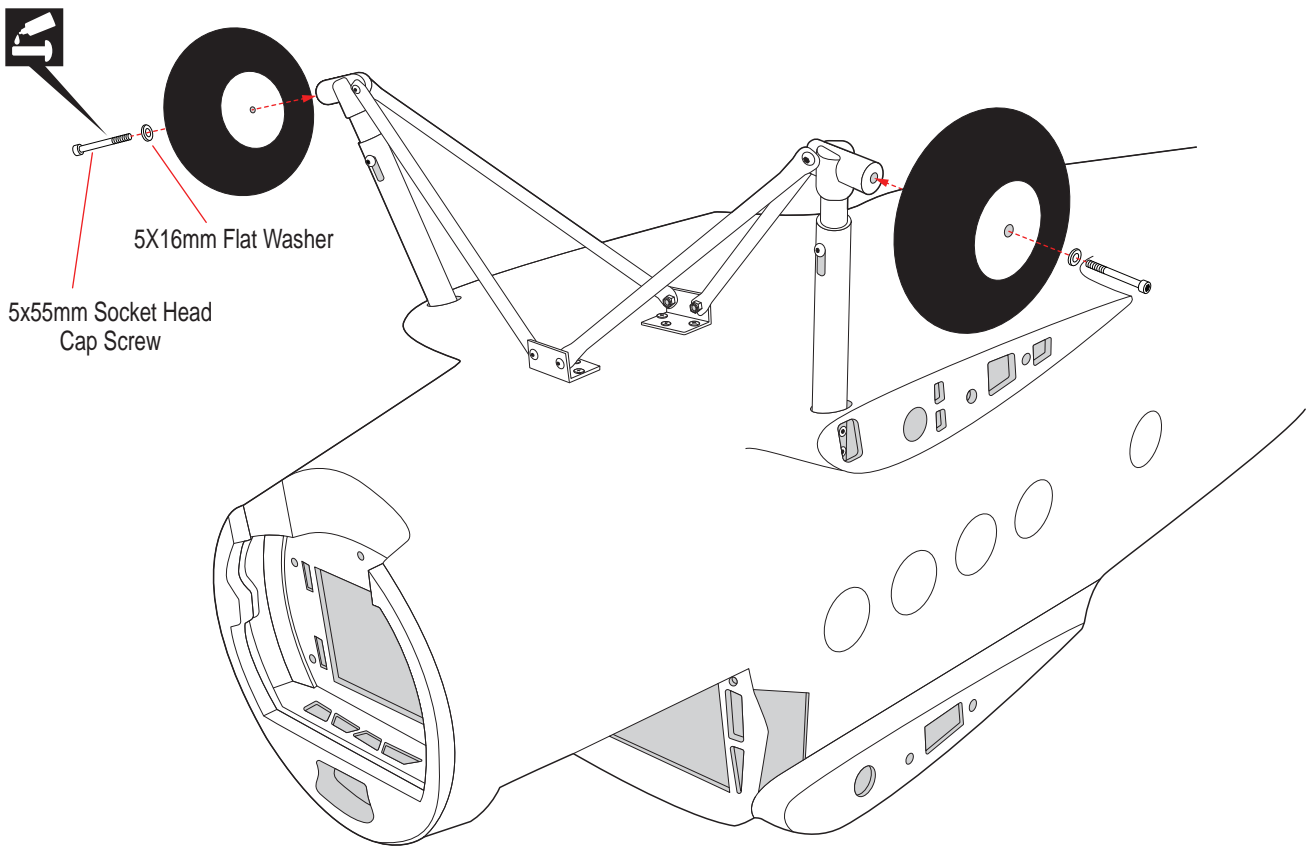


BOTTOM VIEW

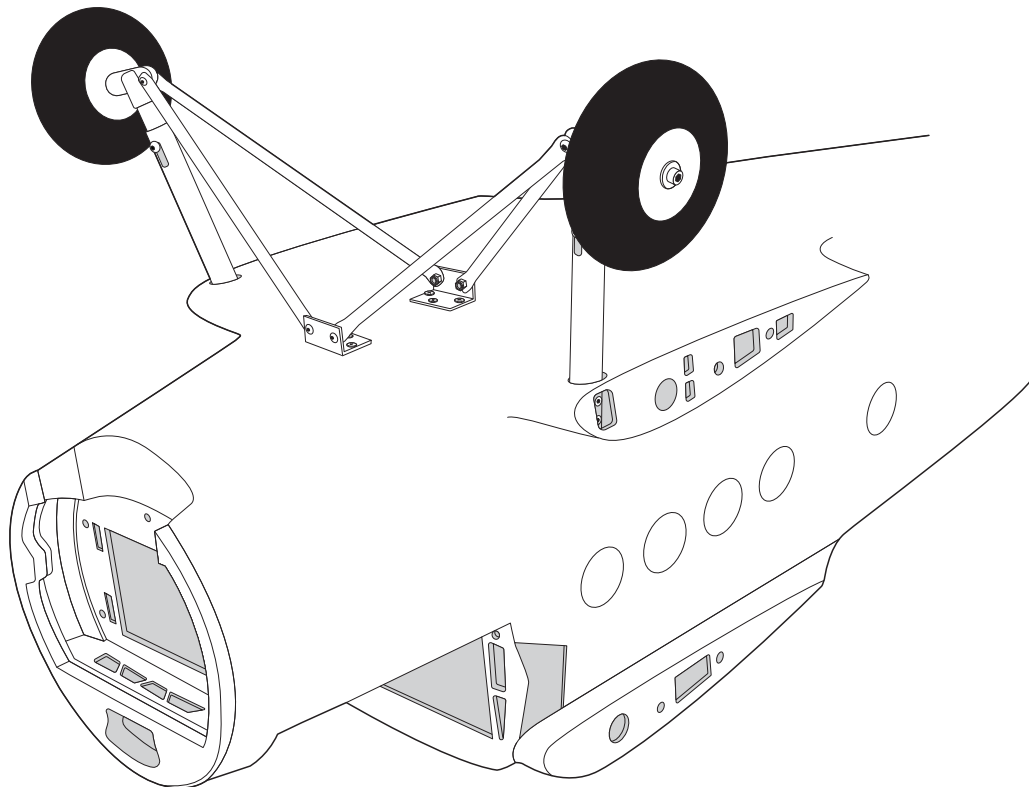

TOP VIEW

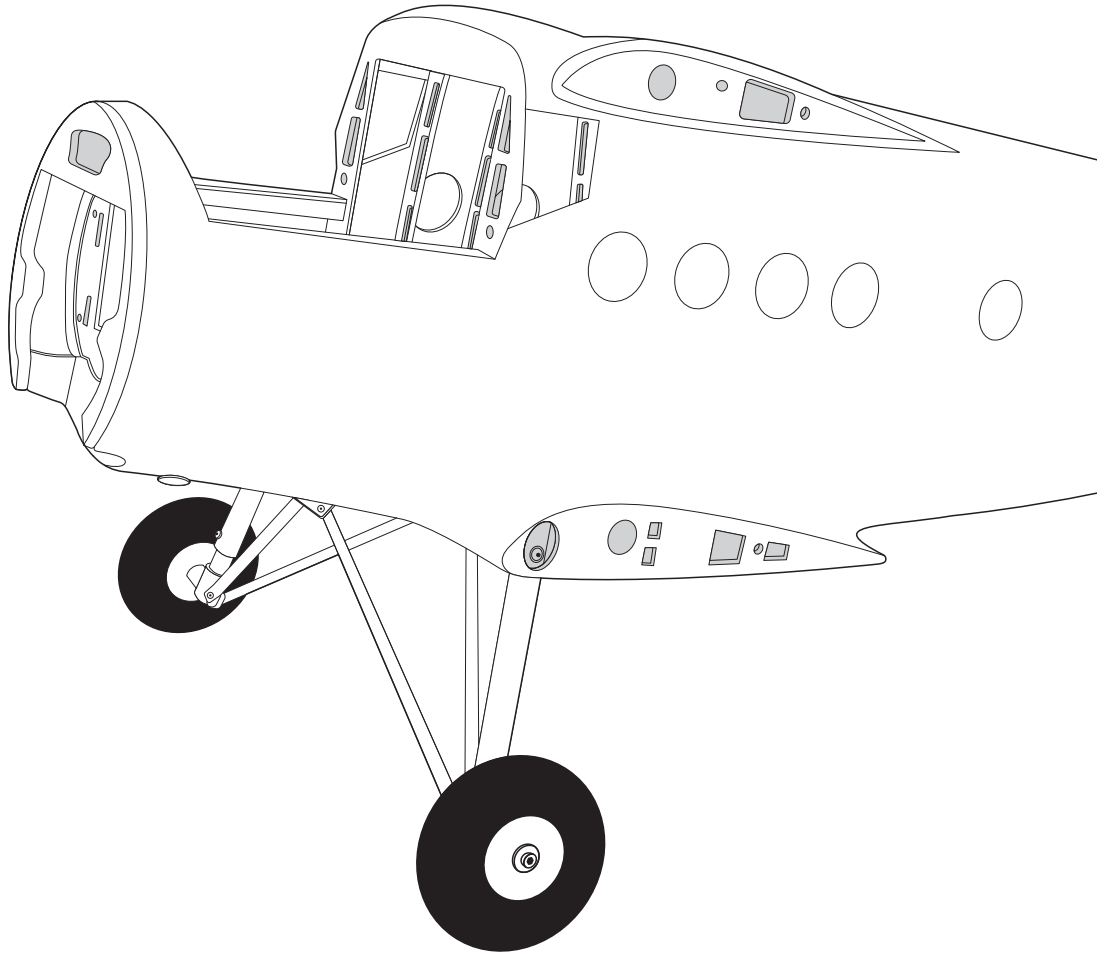


### INSTALLING THE FUSELAGE SERVOS

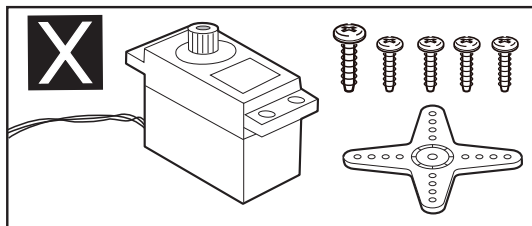


1) Install the rubber grommets and brass collets into the elevator, rudder and throttle servo. Test fit the servos into the servo tray. Trim the tray if necessary to fit your servos.

2) Mount the servo to the tray using the mounting screws provided with your radio system.

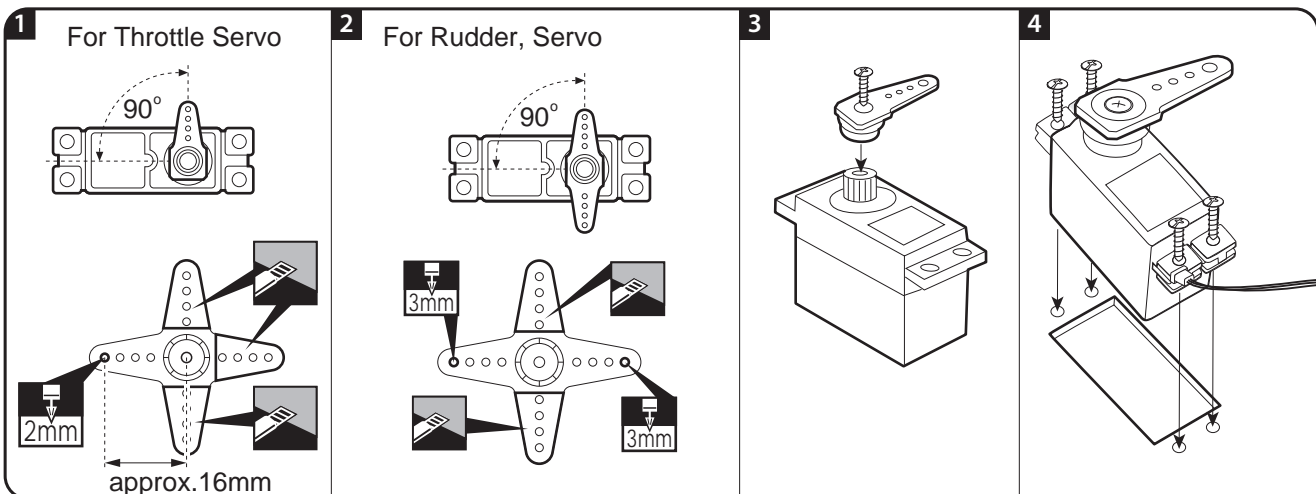


Top view

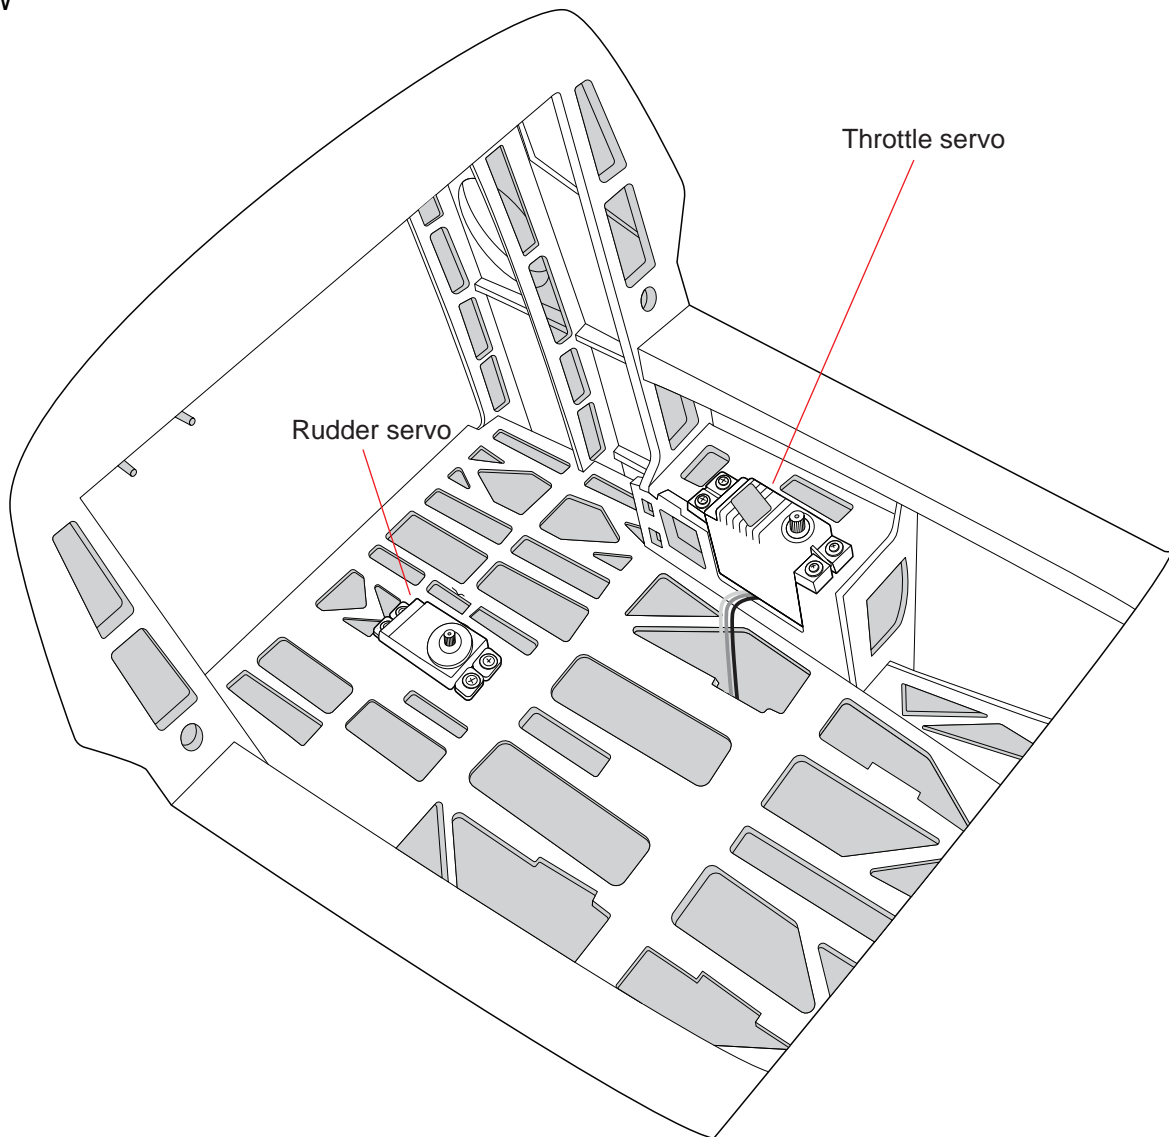

## WING ATTACHMENT


Locate the aluminium wing dihedral brace.

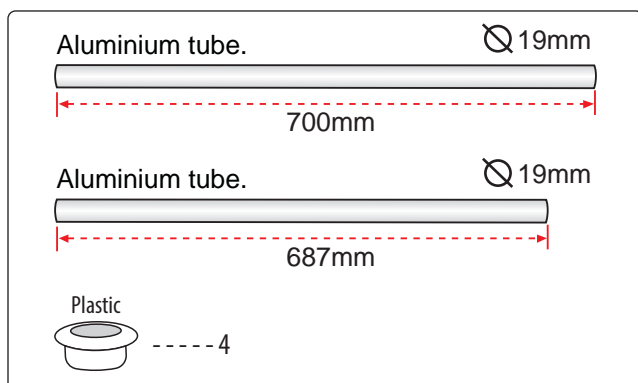


\*\*\* Test fit the aluminium tube dihedral brace into each wing haft. The brace should slide in easily. If not, use 220 grit sand around the edges and ends of the brace until it fits properly.

Attach the aluminium tube into the fuselage.

Top view

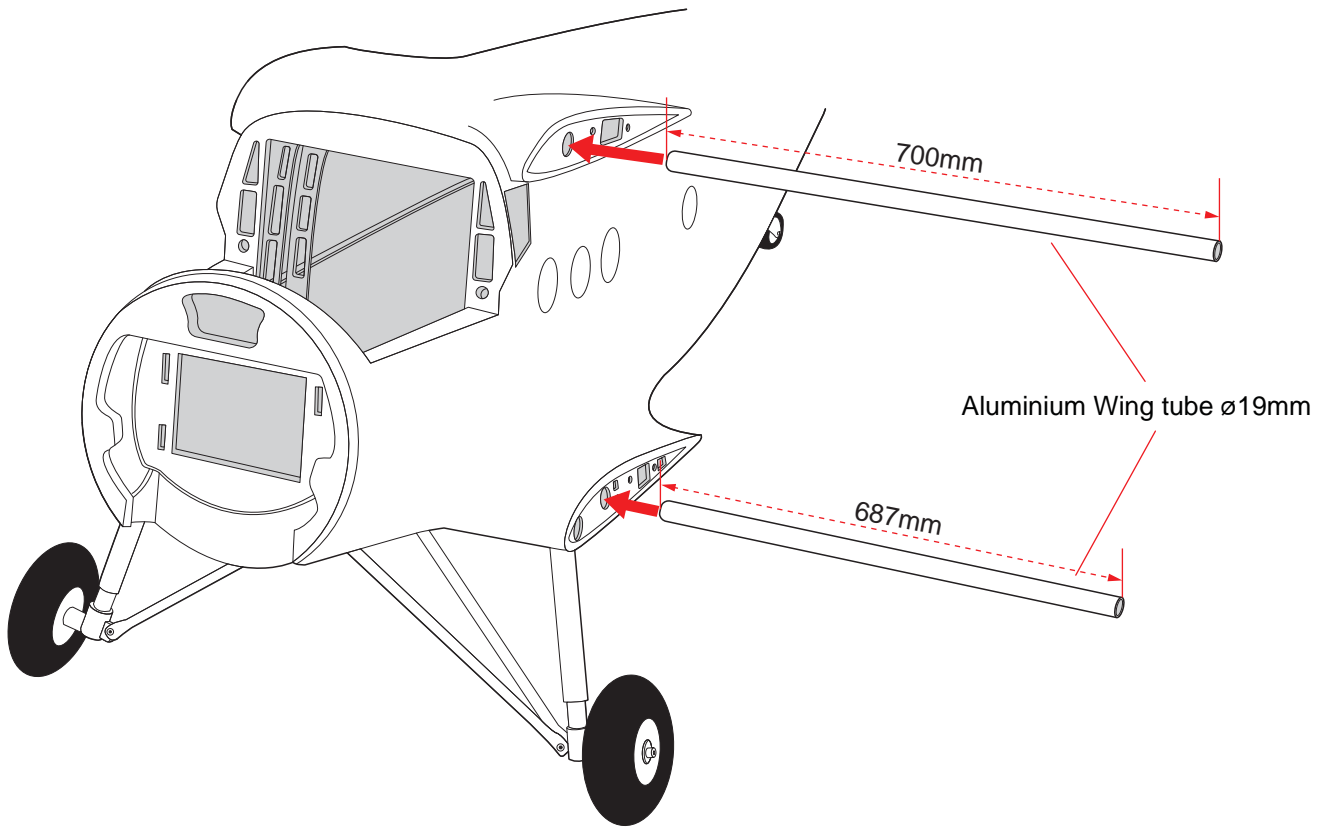

Top view

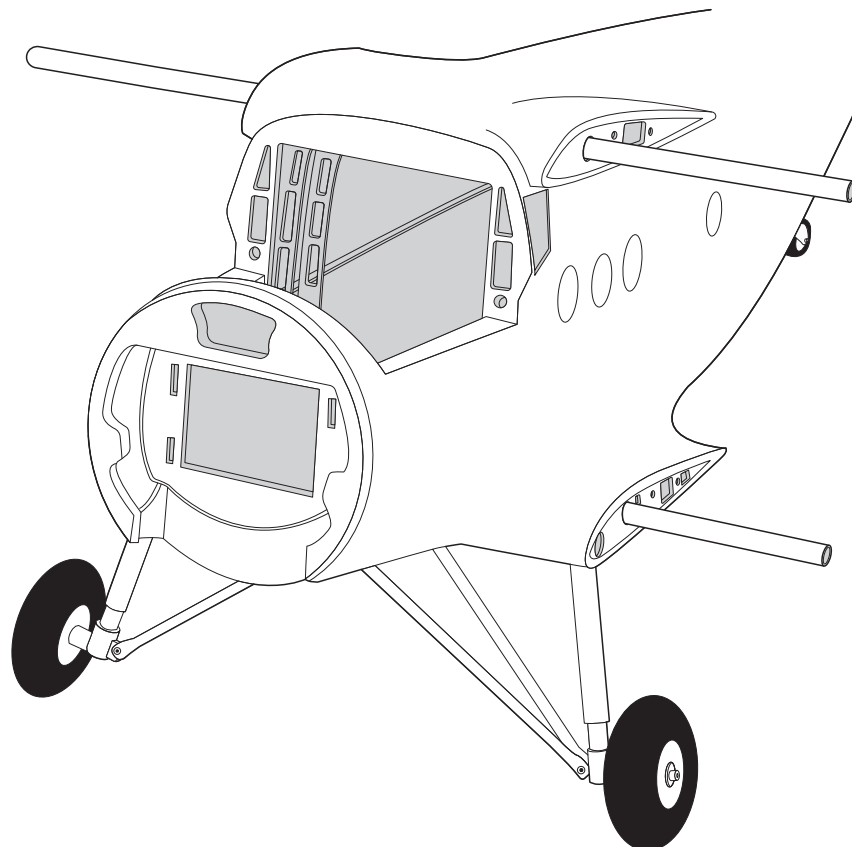




Top view

High Wing




Low wing

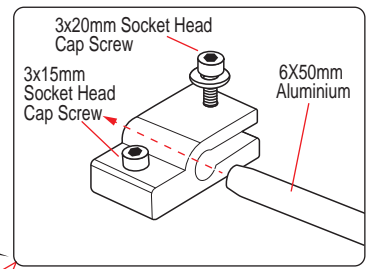

Top view


2.5mm Hex wrench

Cap screw for main wing fixture

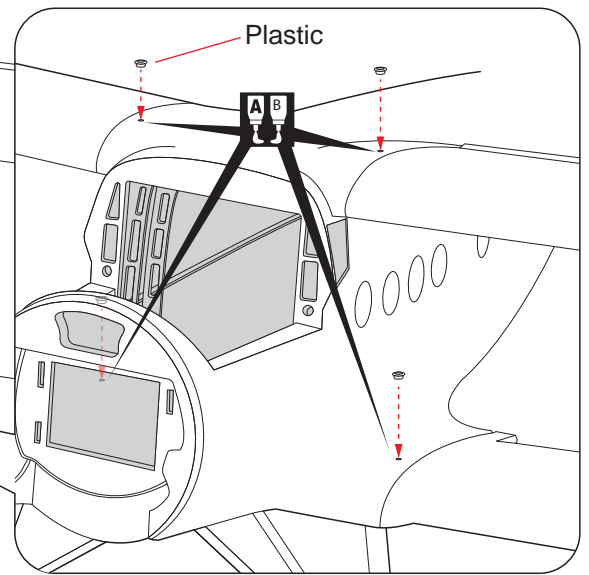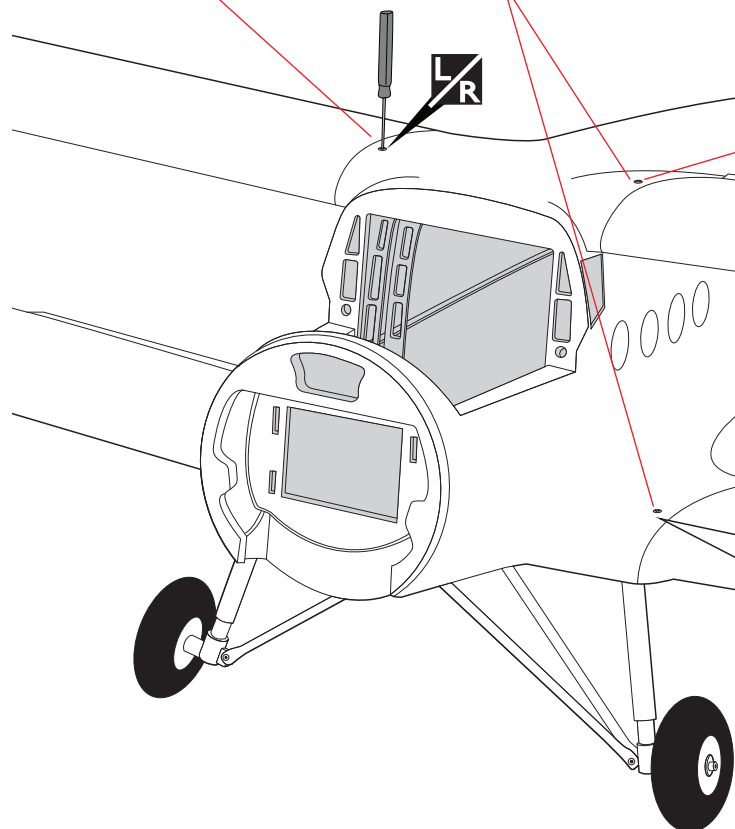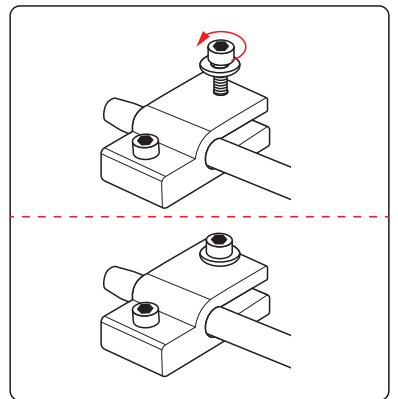
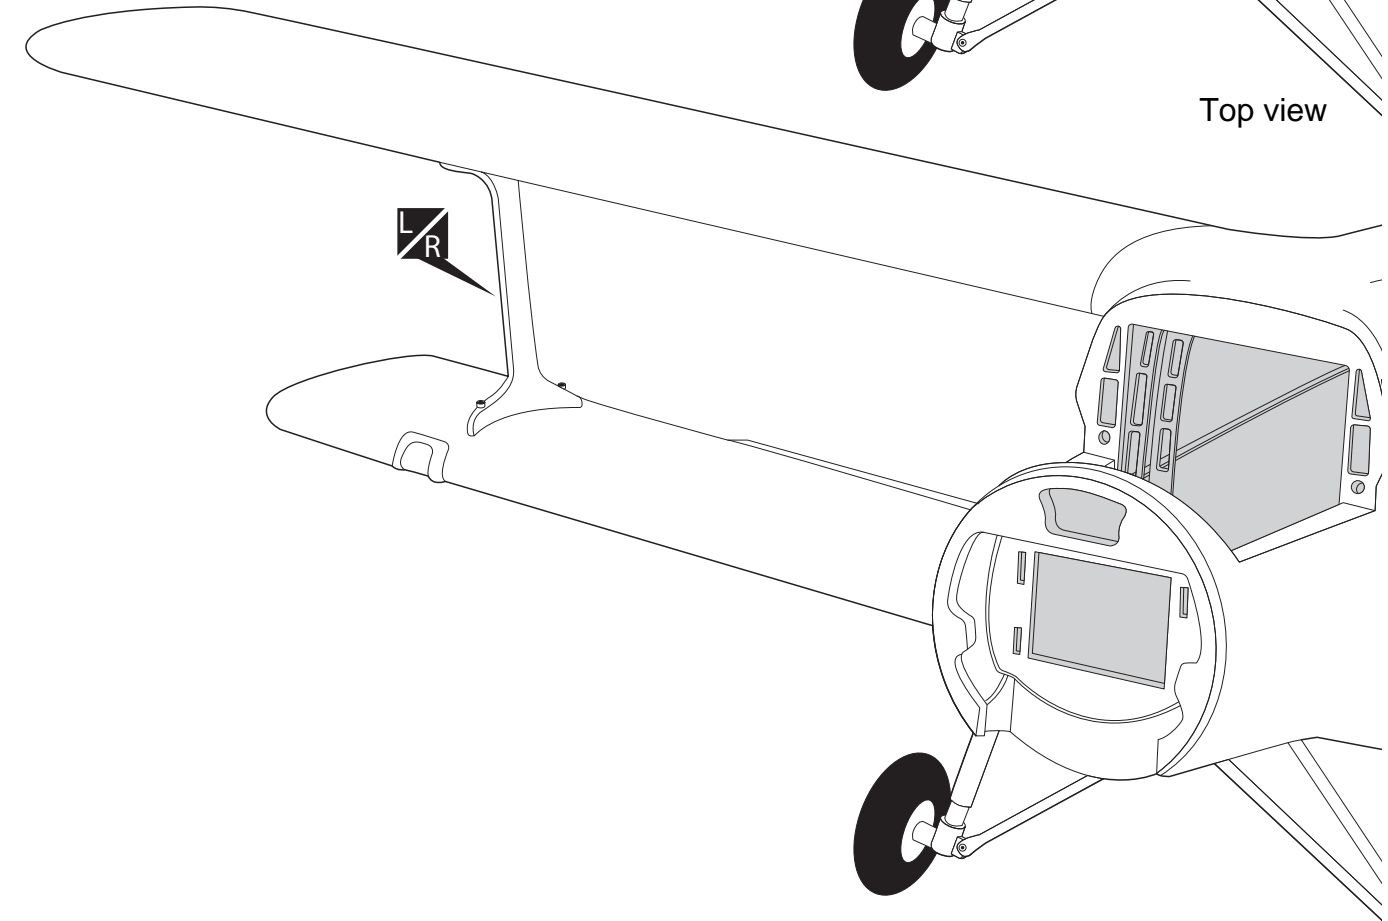
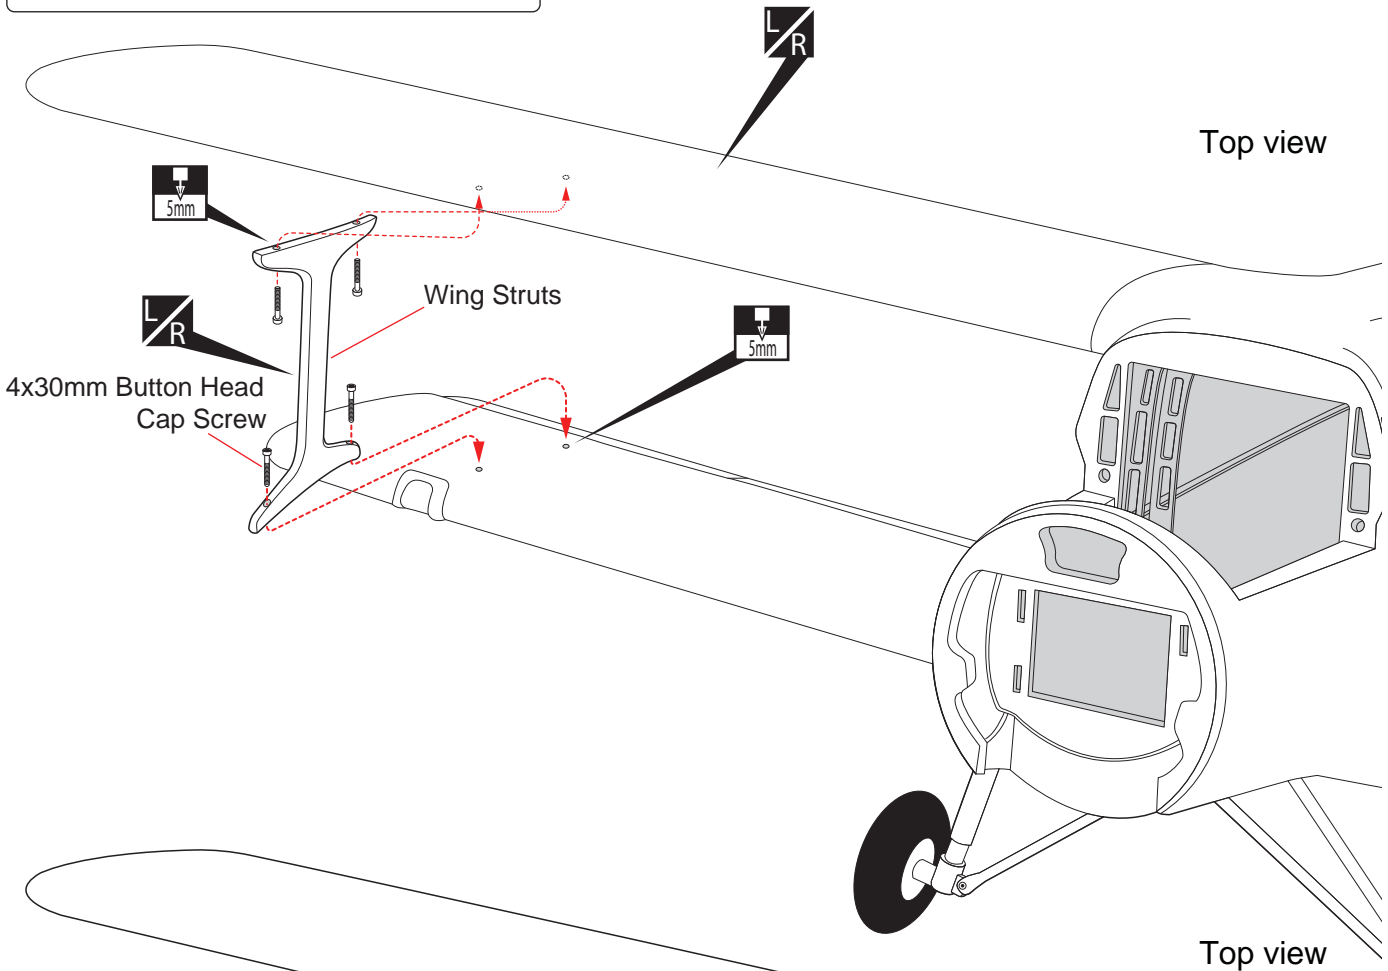


**INSTALLING THE WING STRUTS**

Wing Struts



4x30mm Socket Head Cap Screw

 8




**HORIZONTAL STABILIZER INSTALLATION**

Pinned Hinge



**Warning!**


► Make certain the hinges are adequately secured with glue. If they come loose in flight accidents may result.

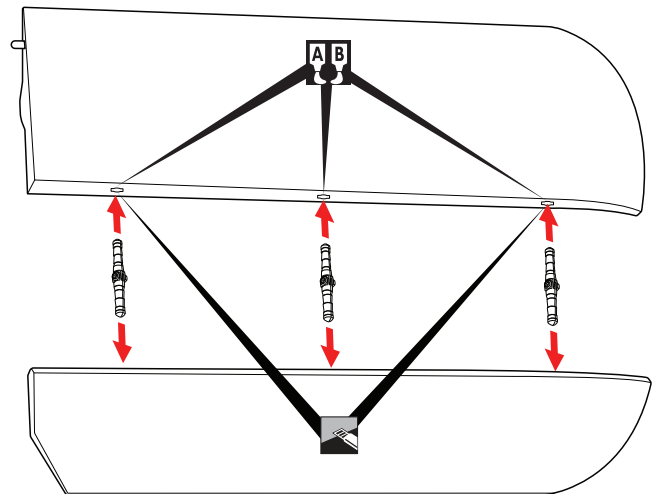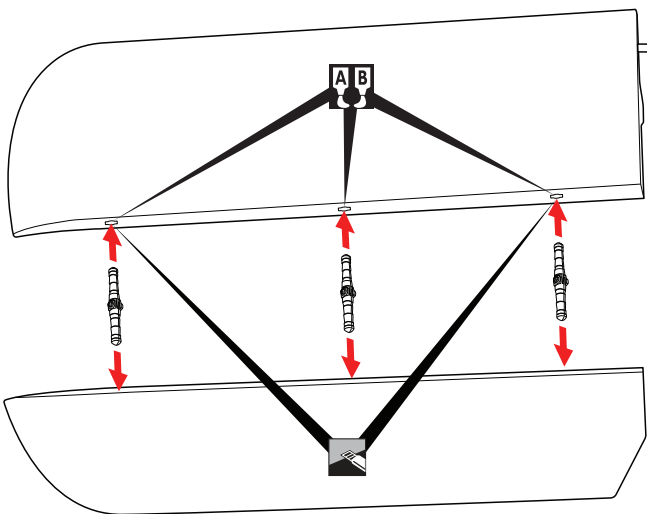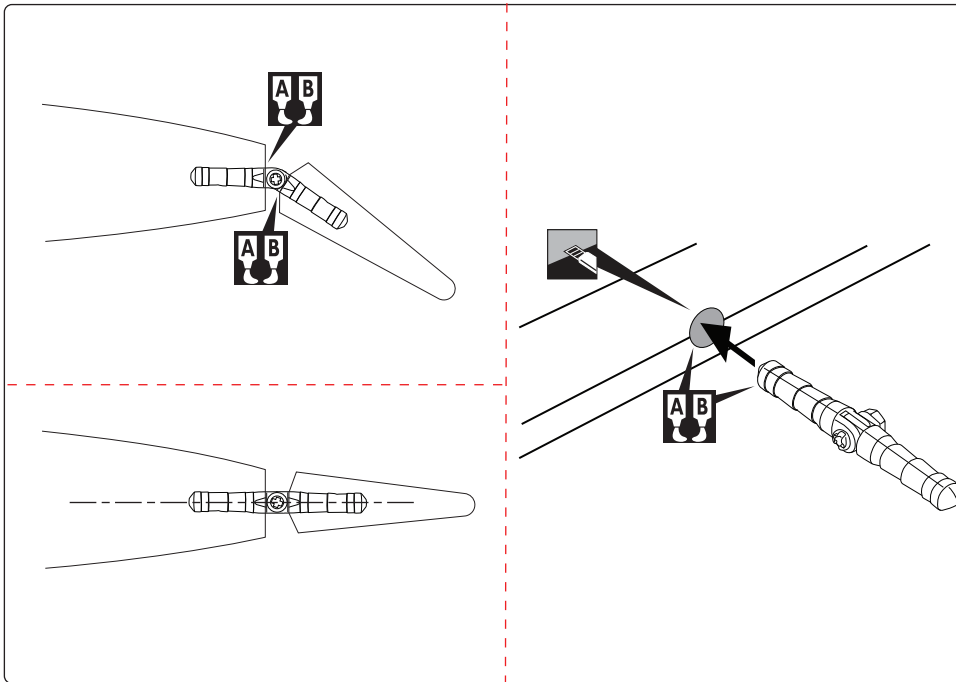


**ELEVATOR CONTROL HORN AND ELEVATOR PUSHROD INSTALLATION**




3x12mm Button Head Cap Screw



3mm Flat Washer






3mm Lock Nut





Apply epoxy glue.

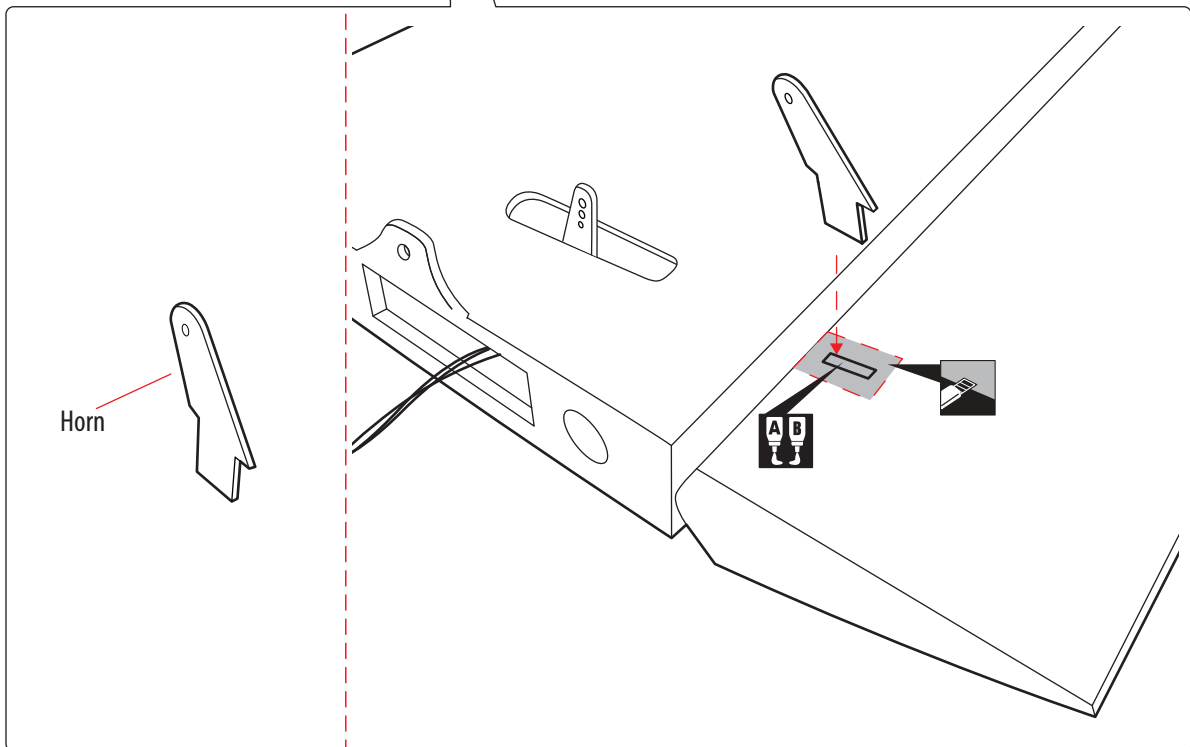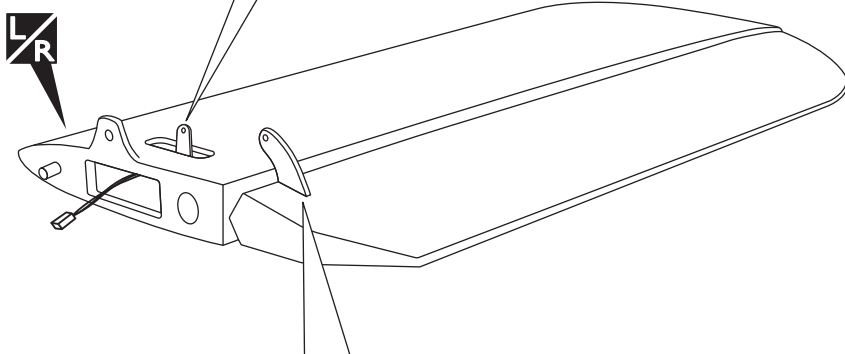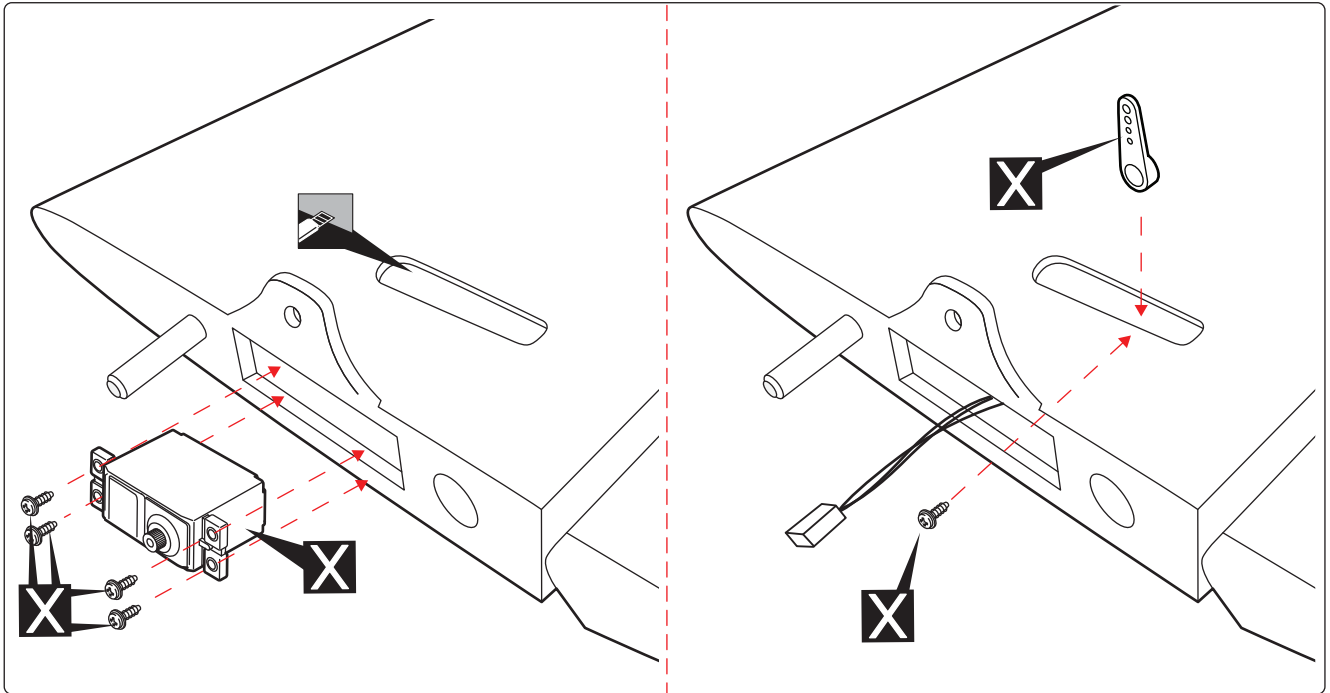


Cut off shaded portion carefully.





 Assemble left and right sides the same way.




 Apply epoxy glue.

 Cut off shaded portion carefully.


 Must be purchased separately!

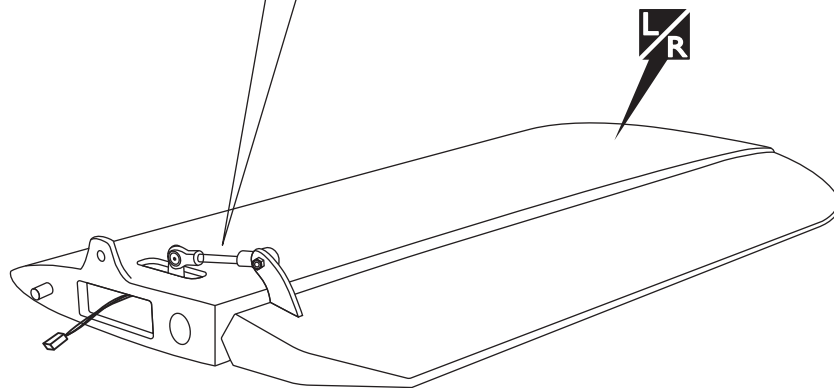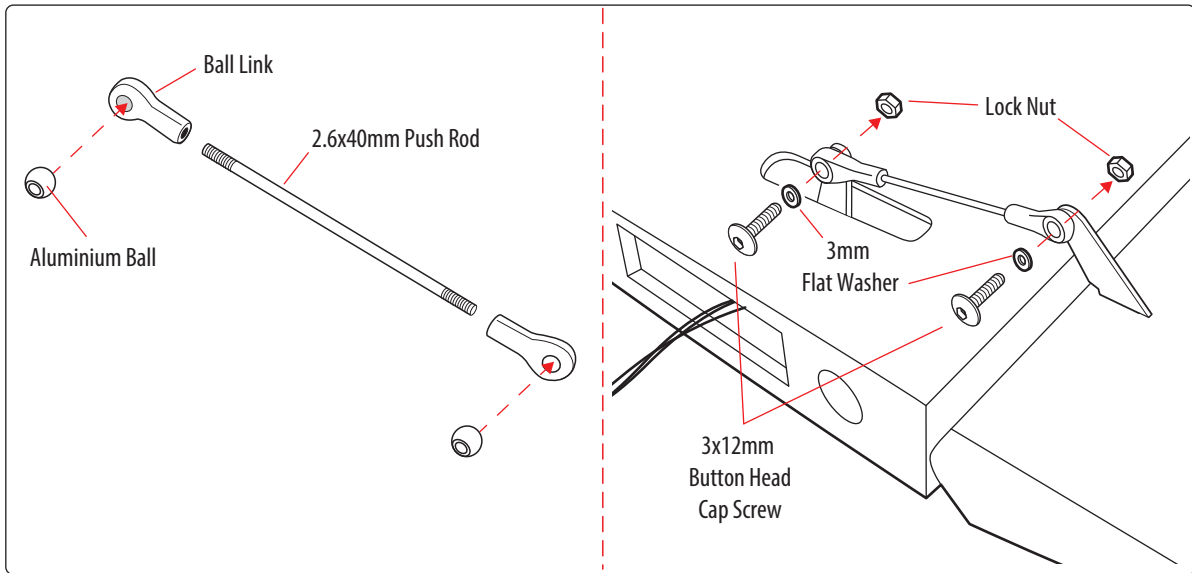


### HORIZONTAL STABILIZER INSTALLATION

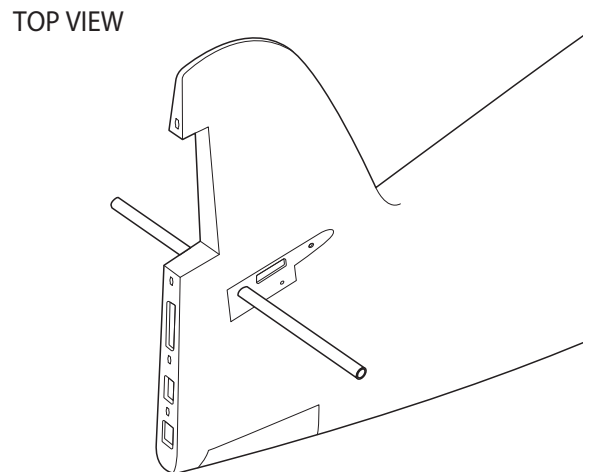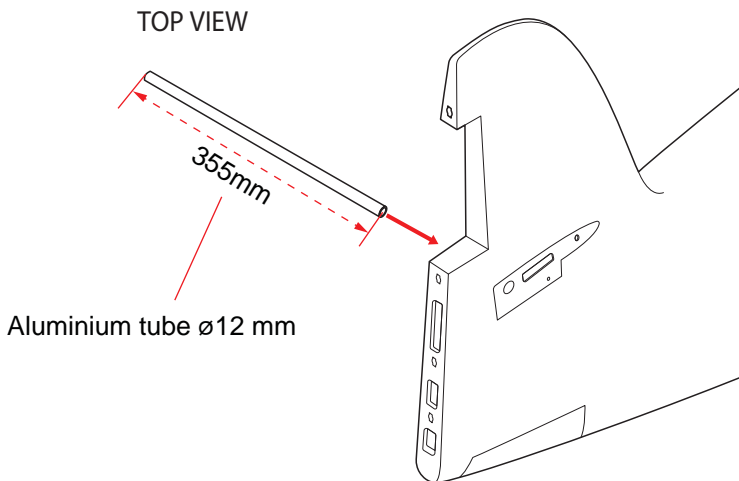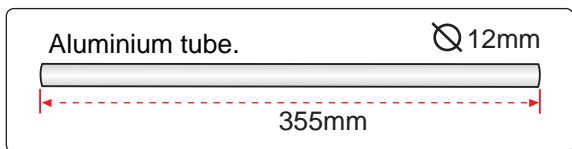



TOP VIEW

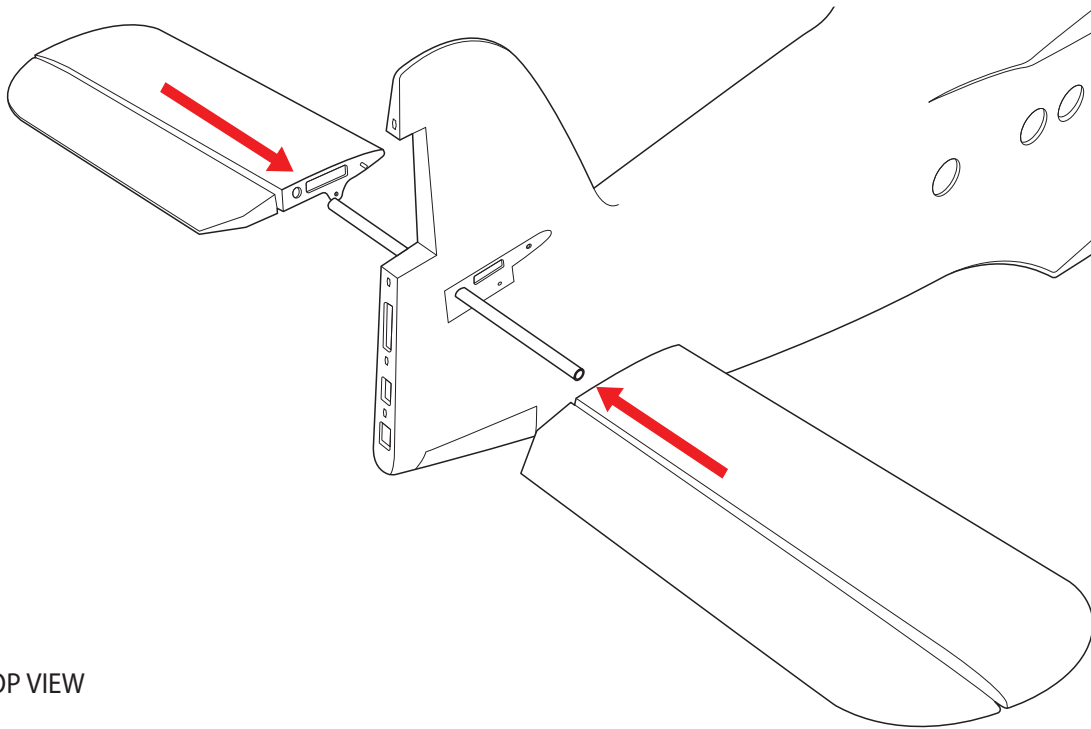


TOP VIEW

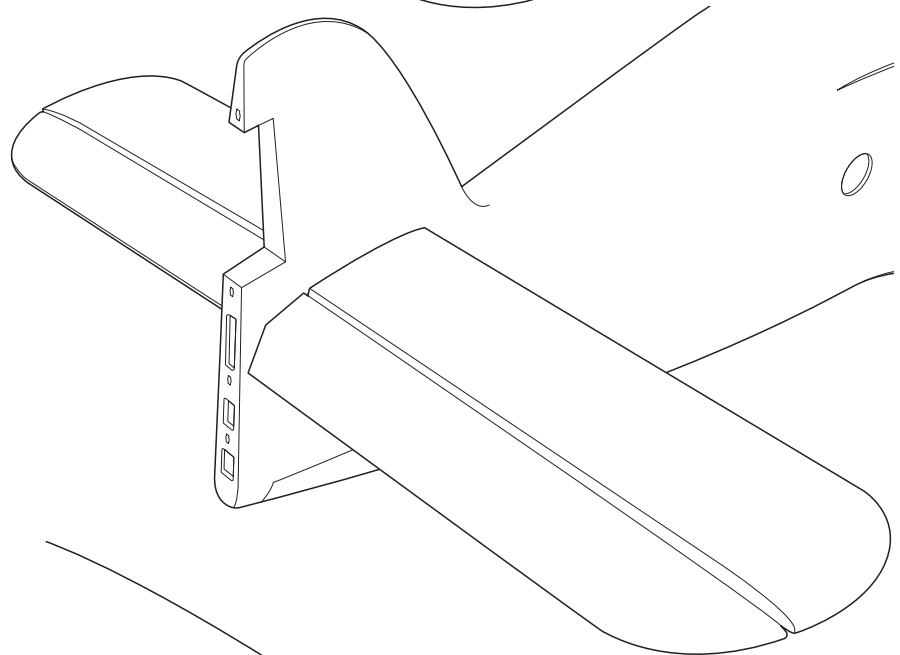



- 4x15mm Button Head Cap Screw  
 ----- 2
- 4mm Aluminium Washer  
 ----- 2

BOTTOM VIEW

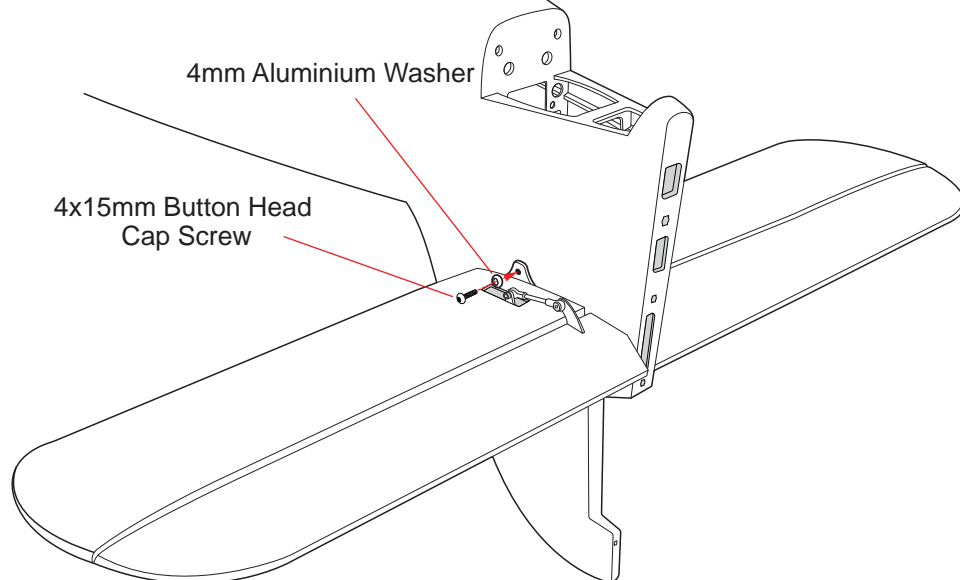





**HORIZONTAL STABILIZER STRUTS**

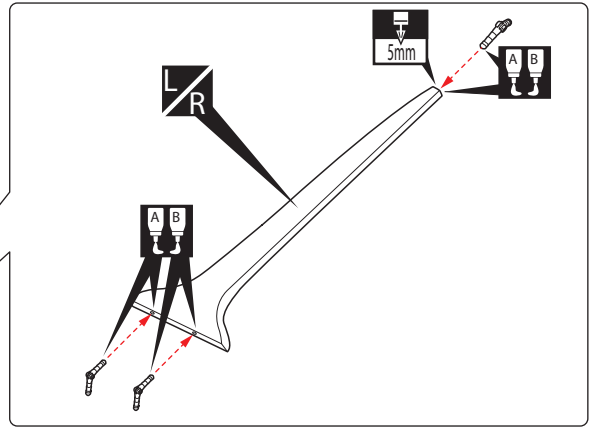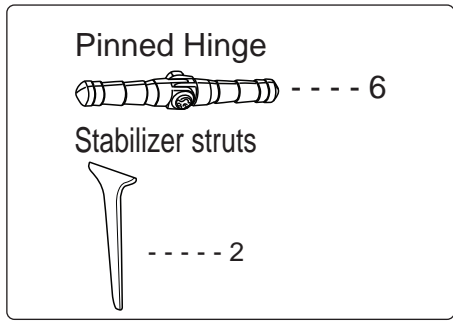

BOTTOM VIEW

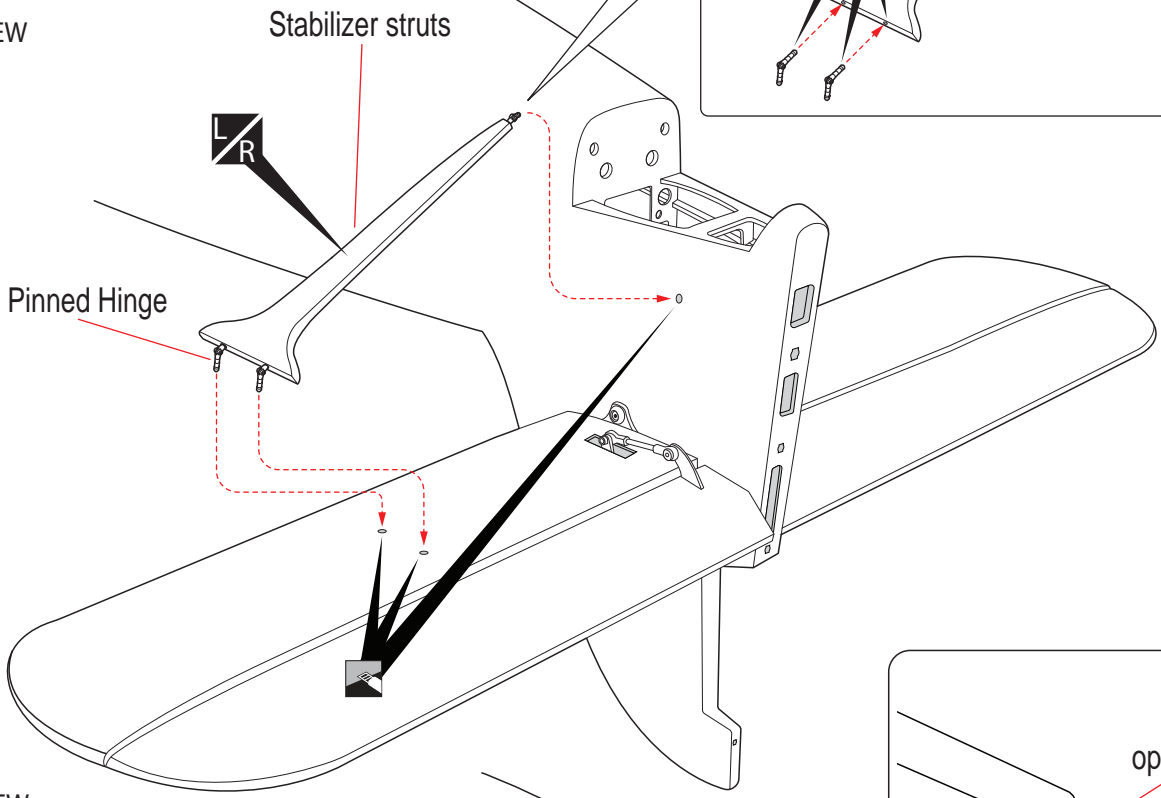

BOTTOM VIEW

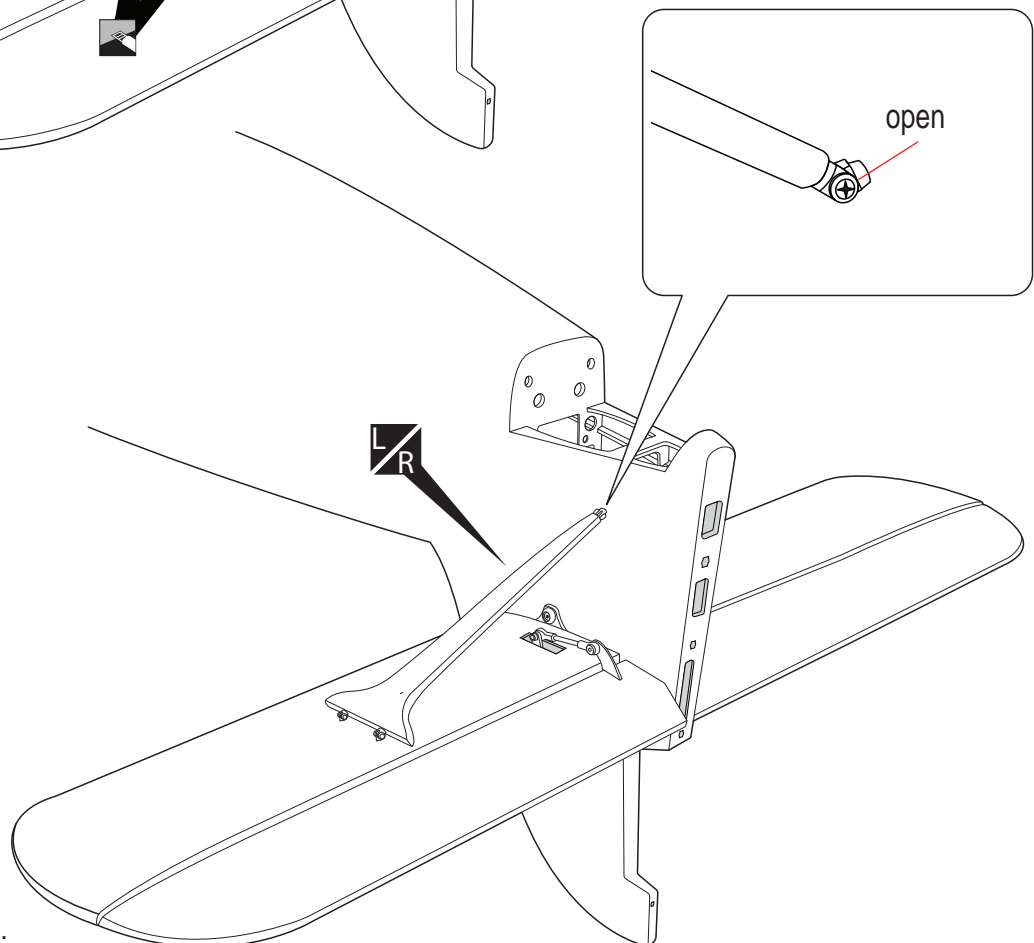

Drill holes using the stated. (in this case 5mm Ø).








Cut off shaded portion carefully.

Apply epoxy glue.


Assemble left and right sides the same way.

**INSTALLING THE RUDDER**


- 1) Rudder are installed the same way as the aileron before.
- 2) Control horn, linkages for rudder are installed the same way as the elevator before.

Pinned Hinge  - - - - 4	3x12mm Cap Screw  - - - - 2
2.6x1.100mm Pushrod  - - - - 1	3mm Flat Washer  - - - - 2
Horn  - - - - 1	3mm Lock Nut  - - - - 2
Ball link  - - - - 2	

TOP VIEW

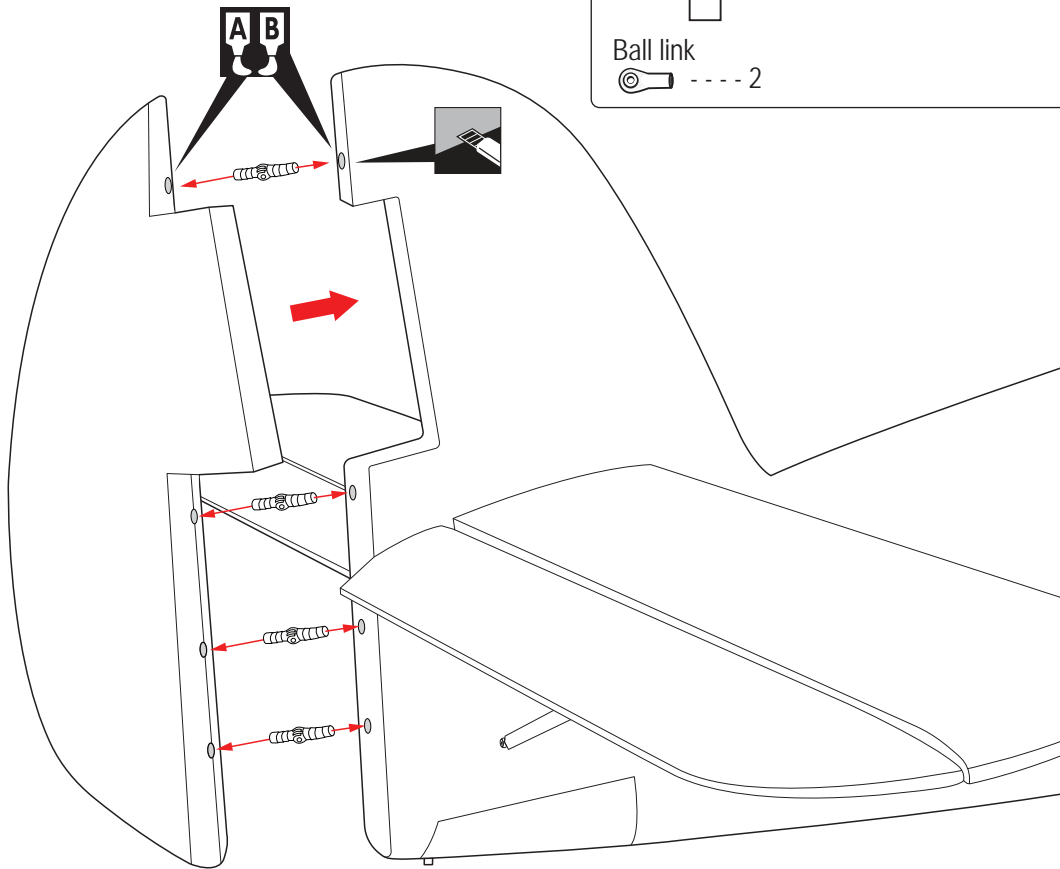





TOP VIEW


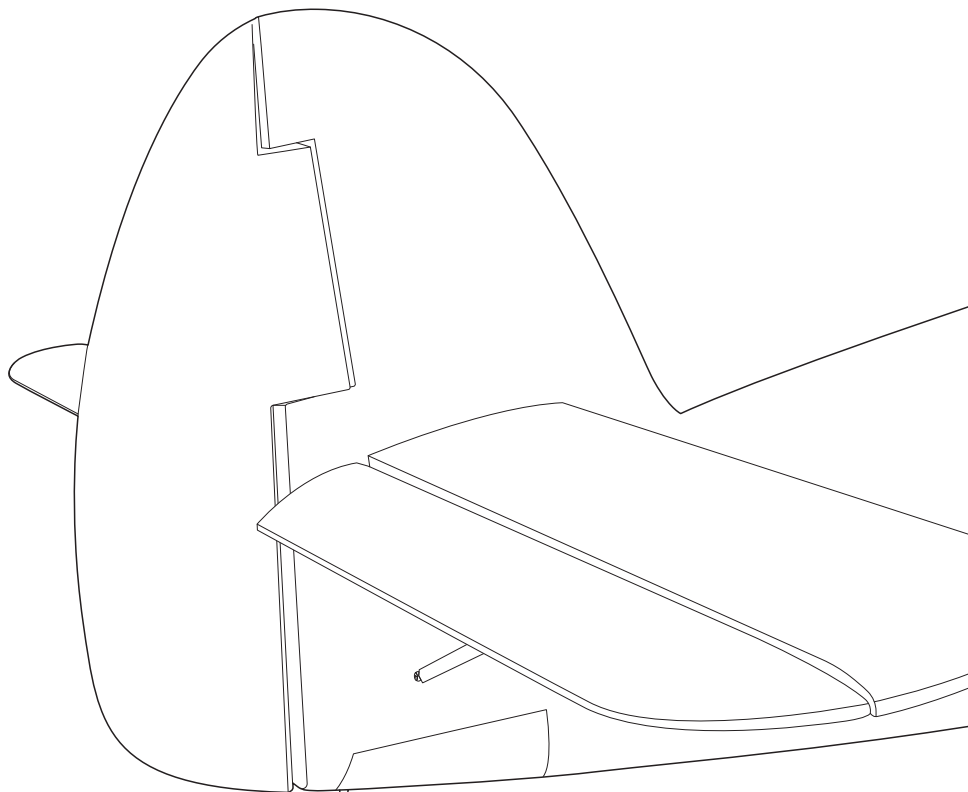


Cut off shaded portion carefully.




Apply epoxy glue.

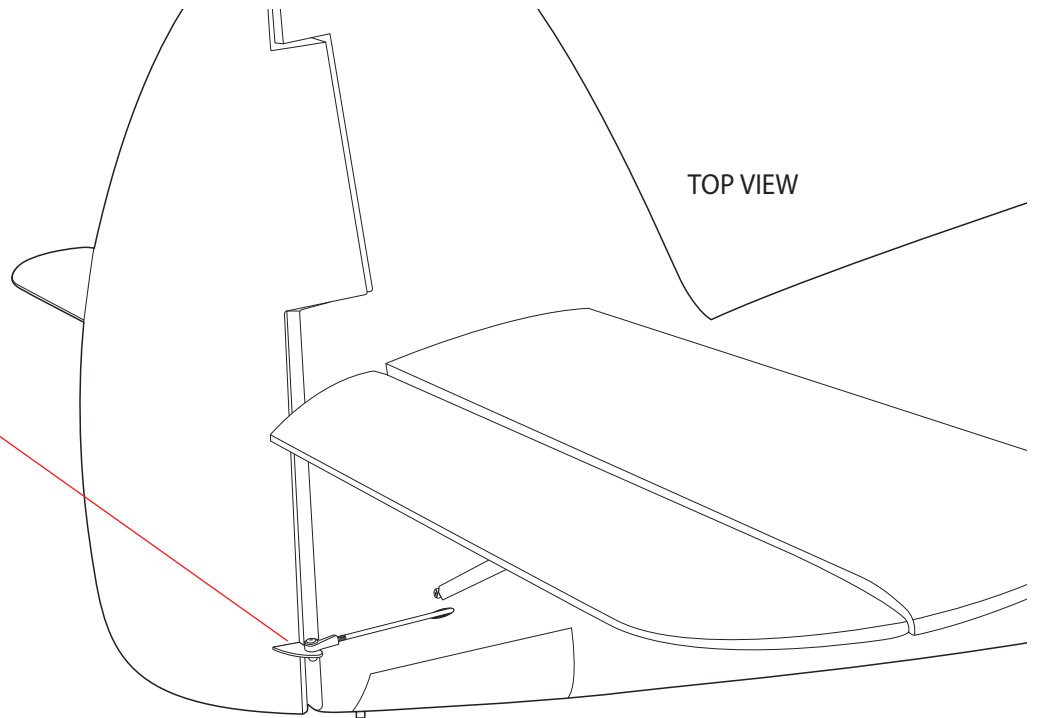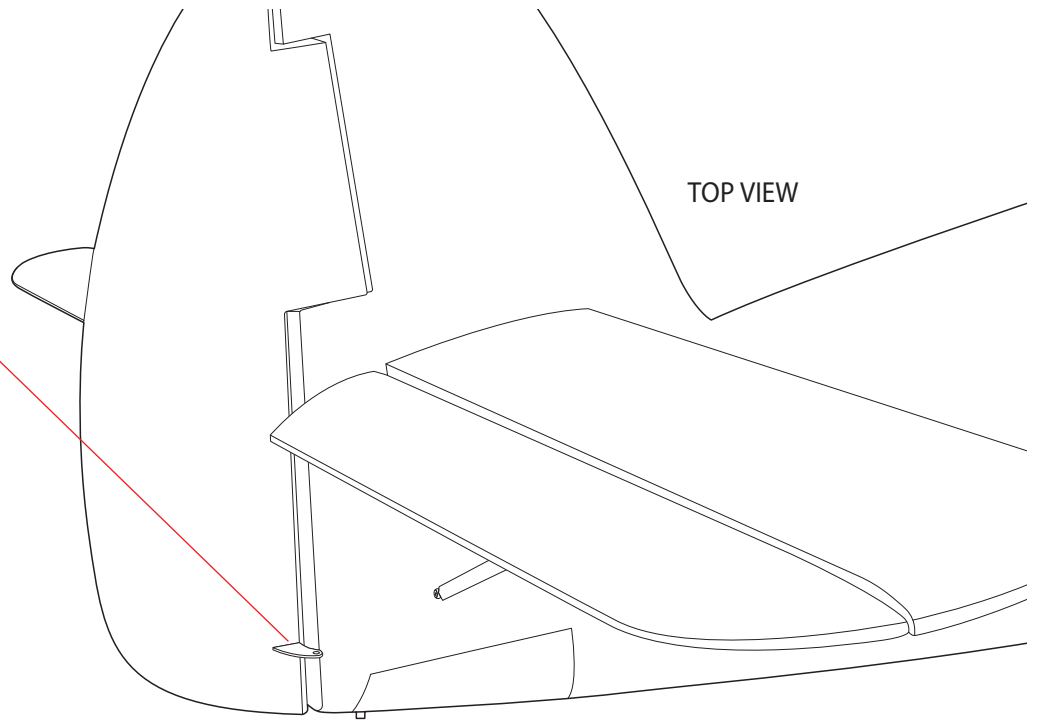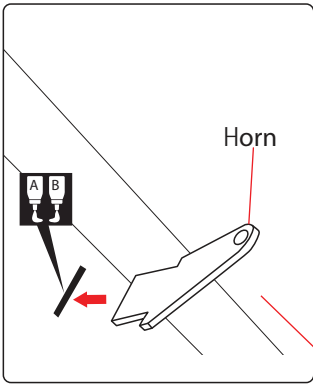

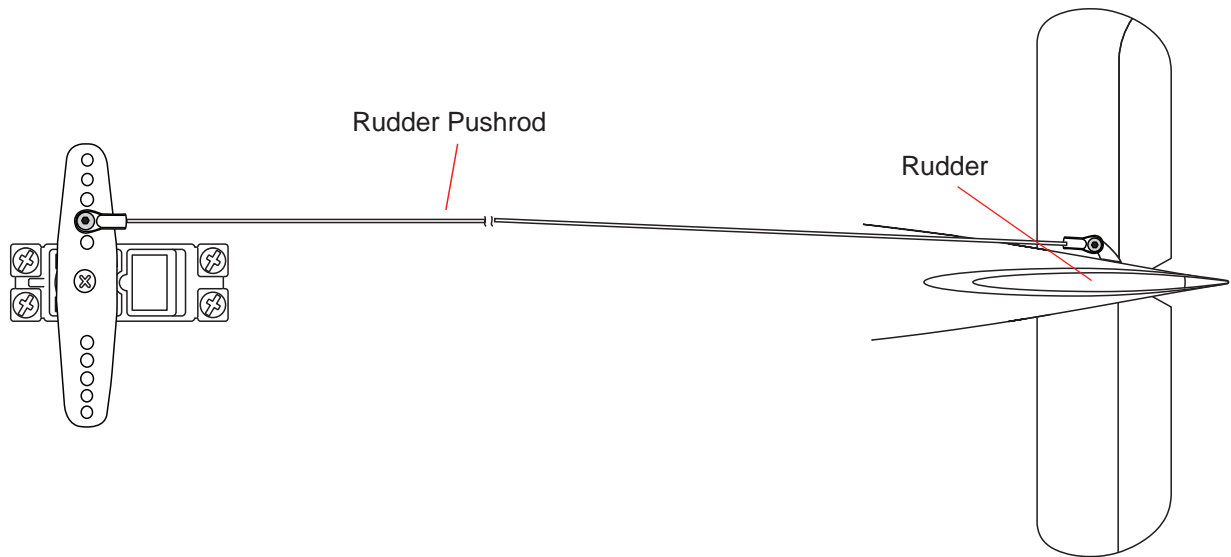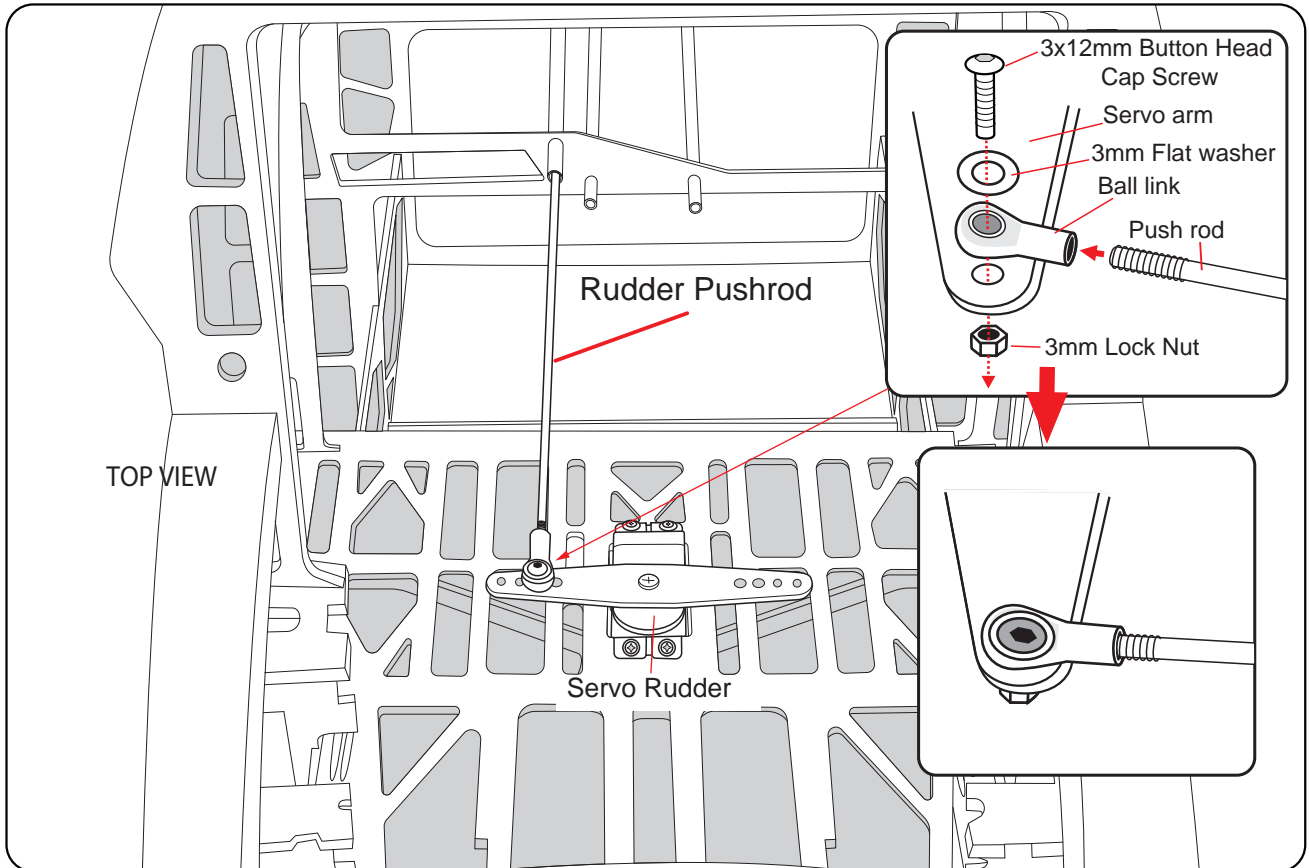


**INSTALLING THE TAIL GEAR**


Cable Threaded Coupler ----- 2	3x15mm Button Head Cap Screw ----- 4	
M3 Metal Clevis ----- 2	3mm Spring Washer ----- 4	
1200mm Cable ----- 2	3mm Flat Washer ----- 4	
Press Fitting For Steel Cable ----- 4	3mm Hex Nut ----- 2	

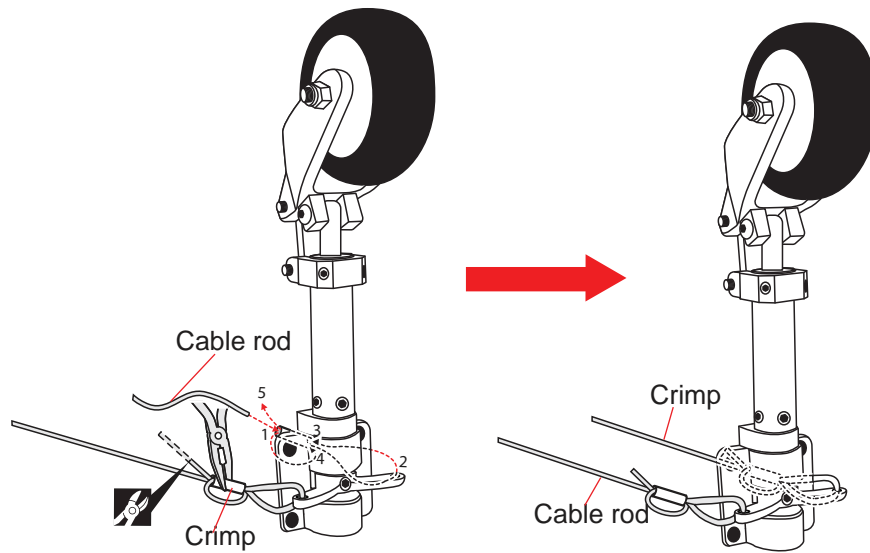


BOTTOM VIEW

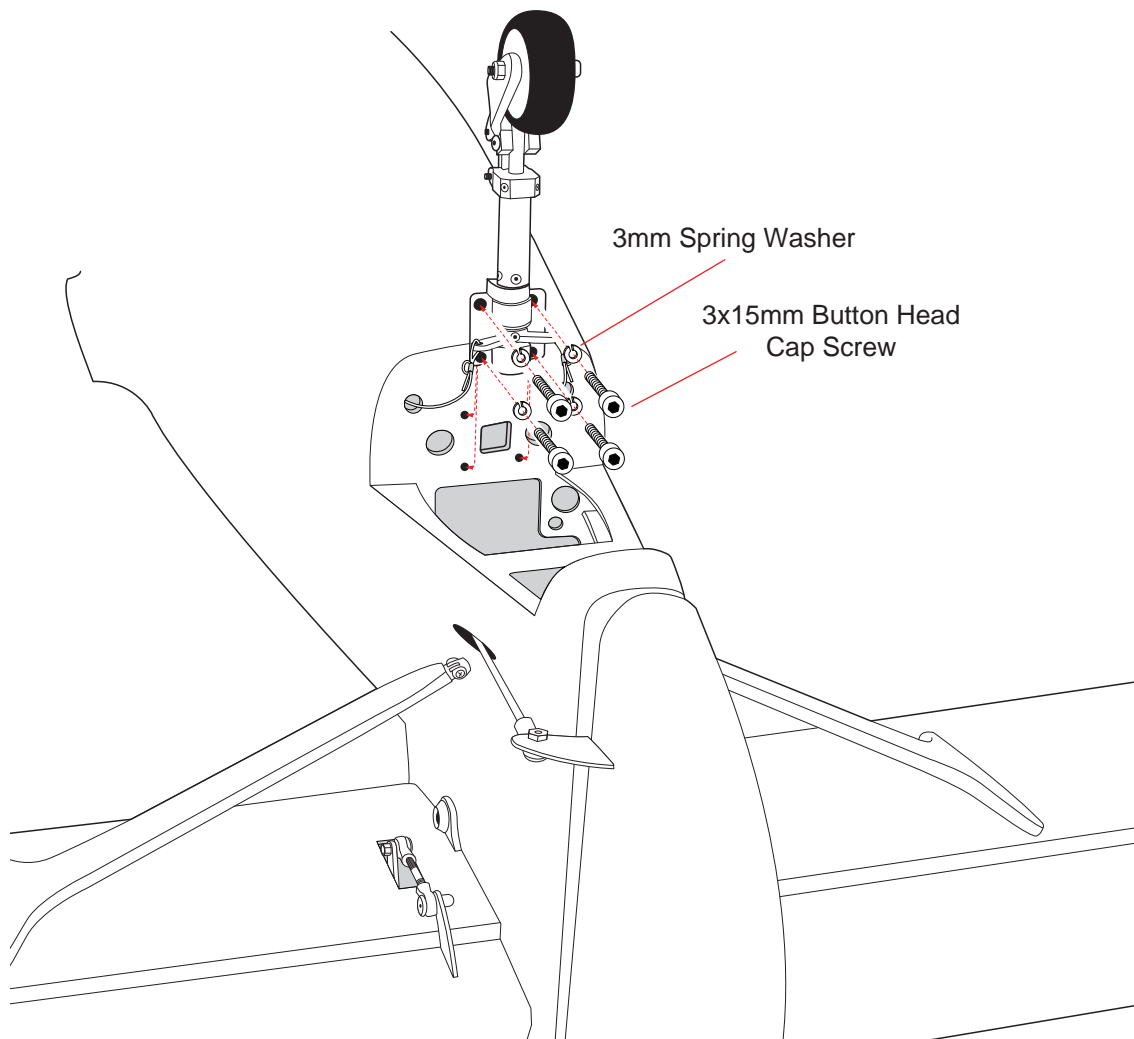

Cut off excess.

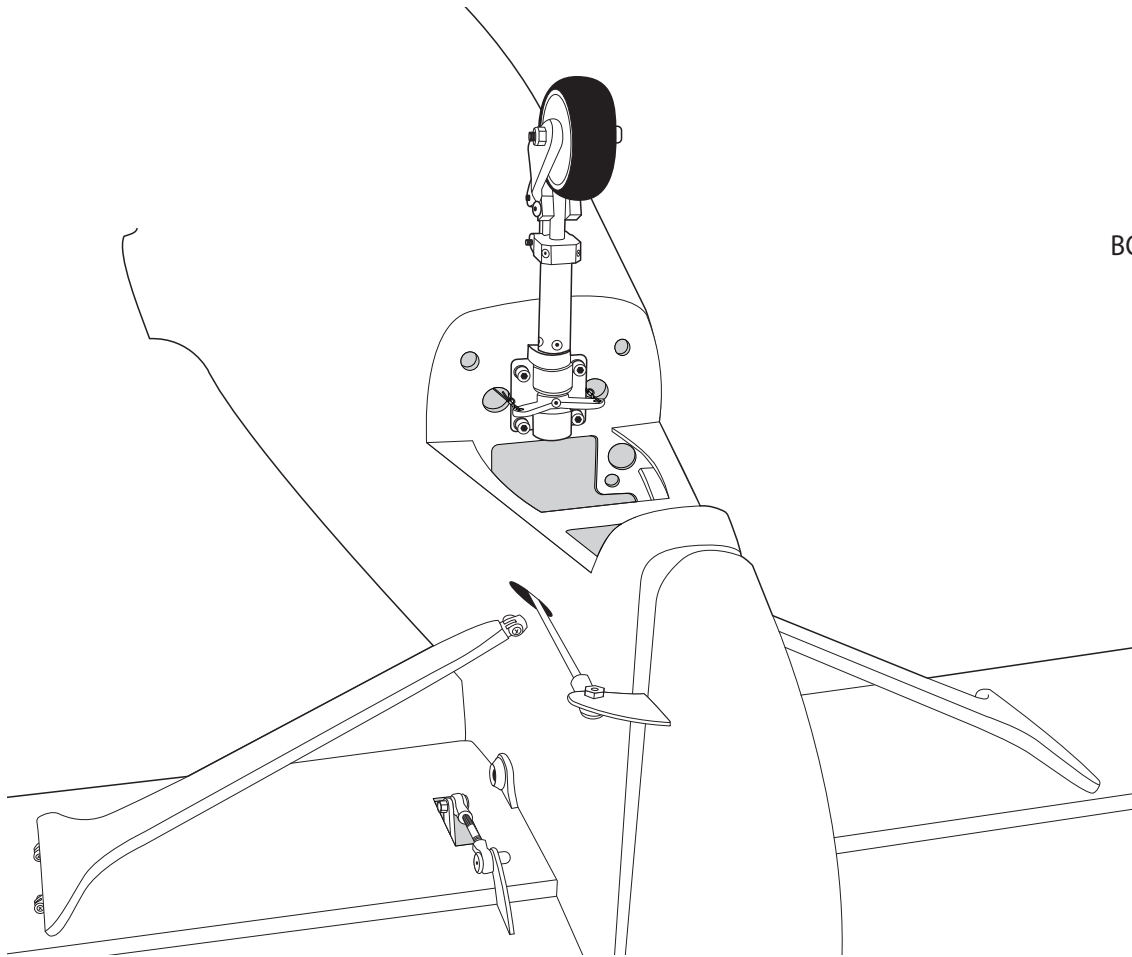




BOTTOM VIEW

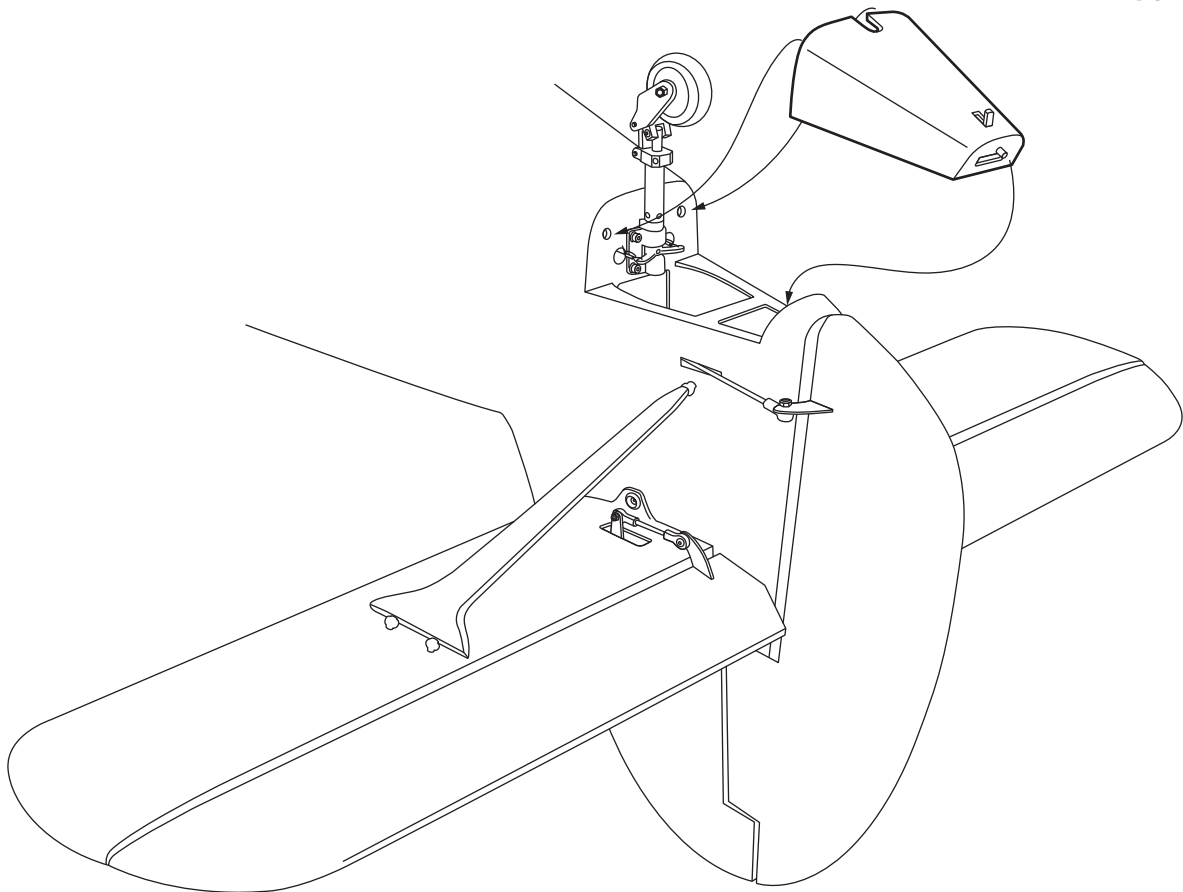

BOTTOM VIEW



BOTTOM VIEW

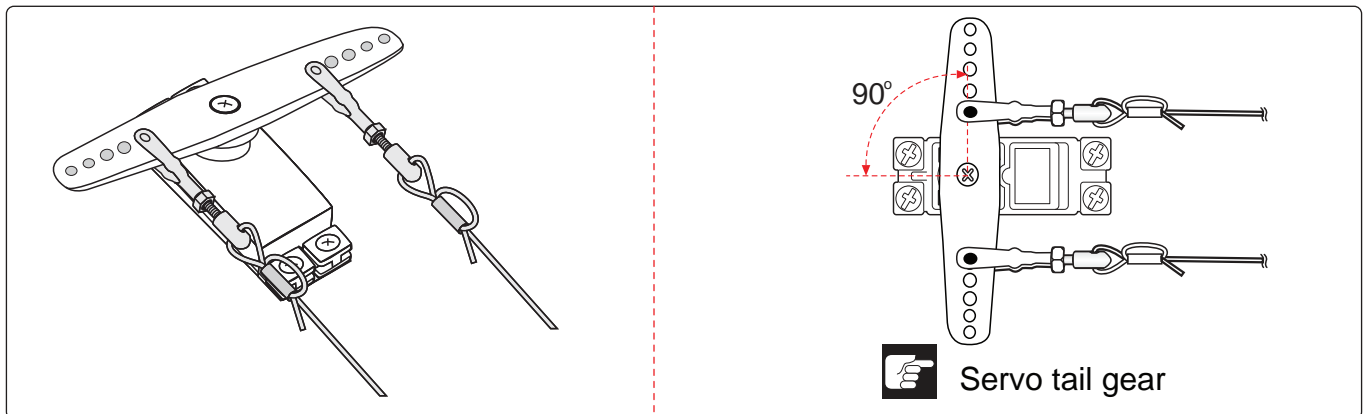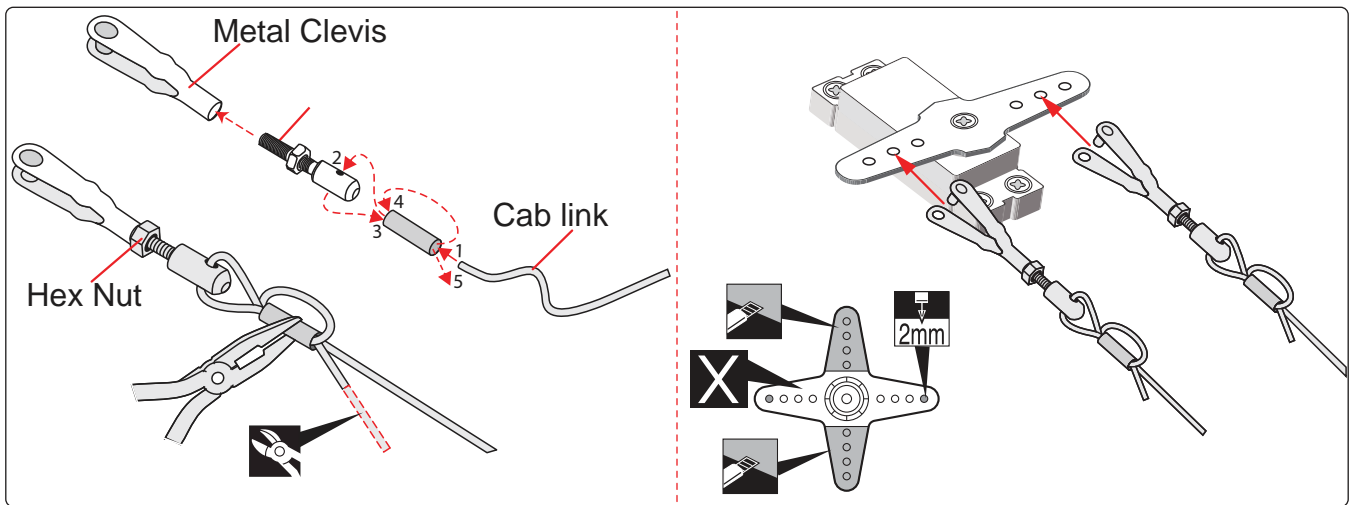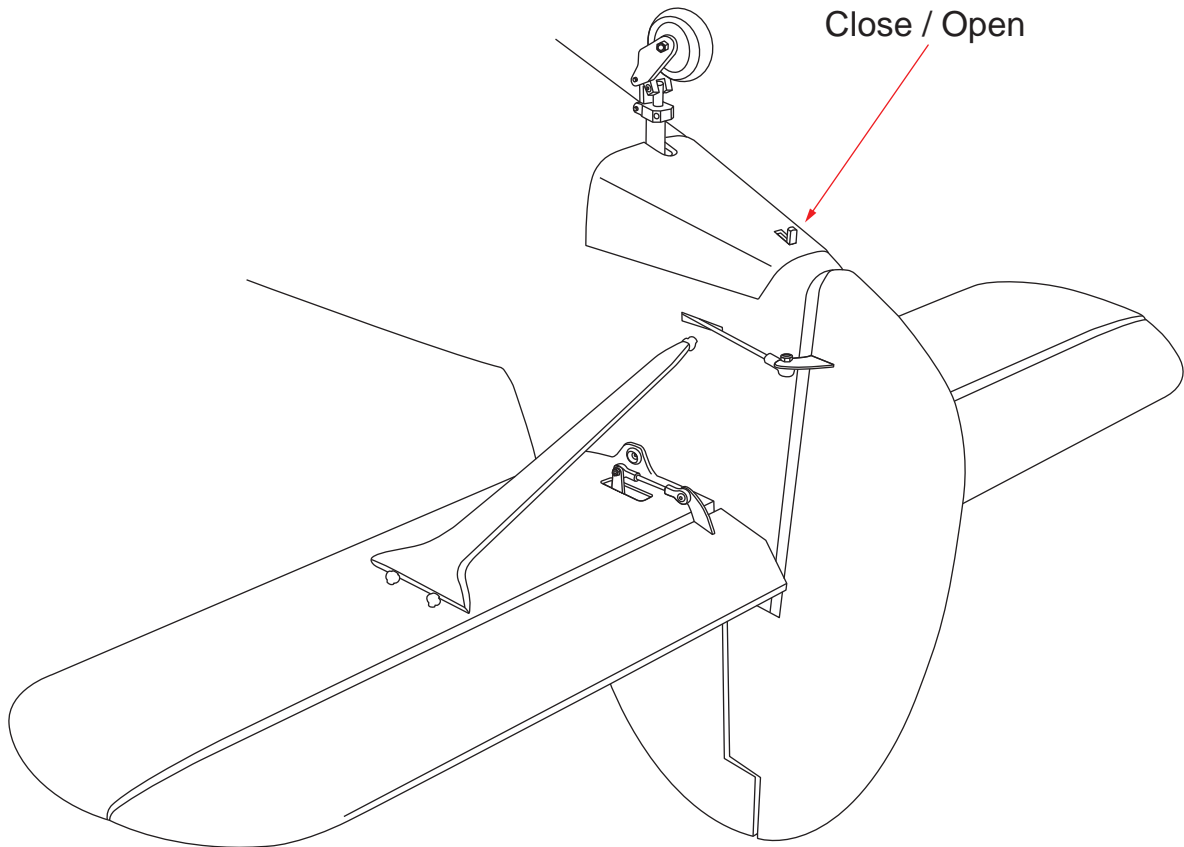

Pay close attention here.



Drill holes using the stated. (in this case 2mm Ø).



Cut off shaded portion carefully.





Must be purchased separately!




Cut off excess.

TOP VIEW

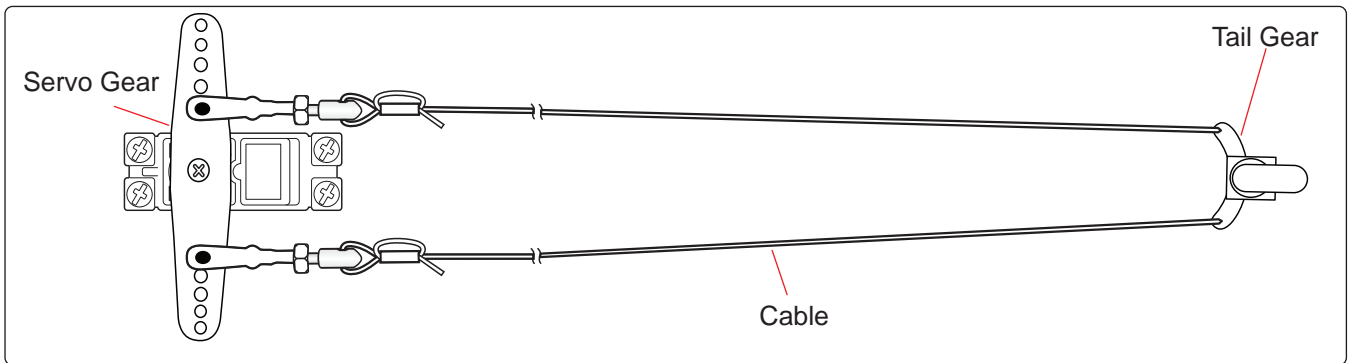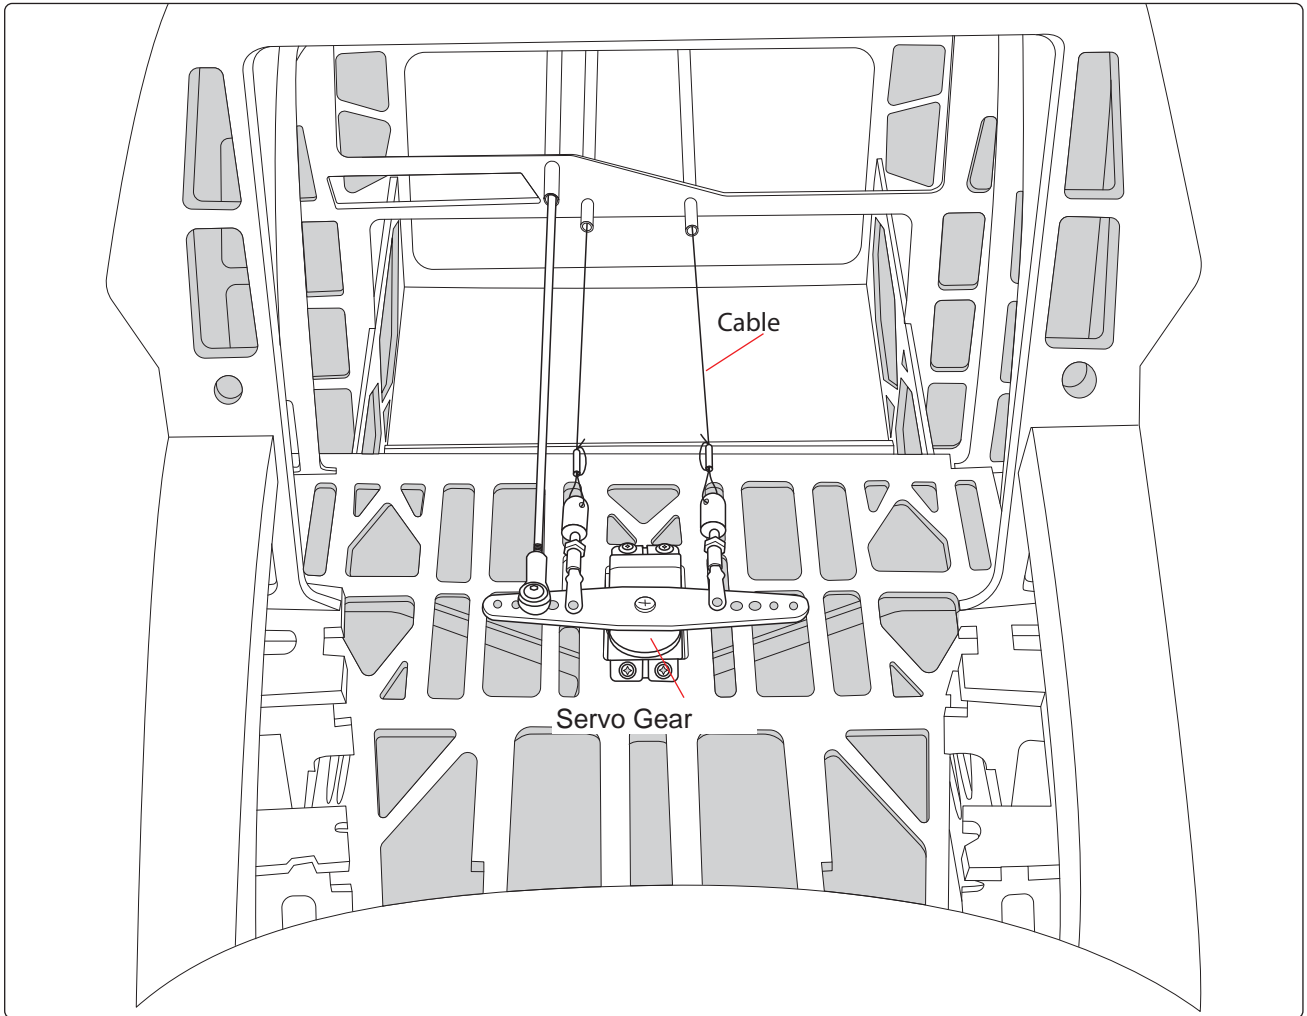


**INSTALLING THE ENGINE**

Using plate of plywood (supplied with the kit) mark the holes onto the fire wall for installing the engine mount for DLE-35CC or OS-33CC.

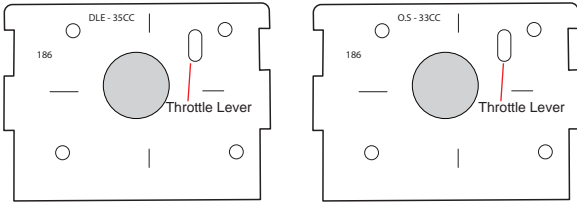


May be you also need to trim some wood from the tri-angle wood for the installation is easy.





**DLE-35CC**

Plate of plywood

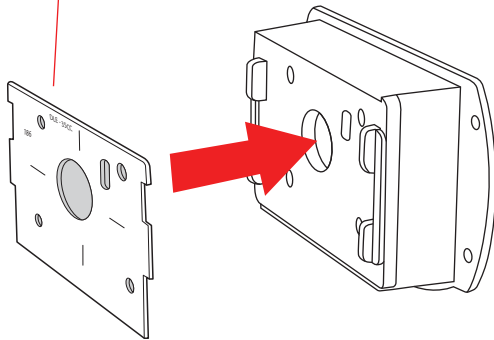


Throttle hole  $\Phi$  6mm

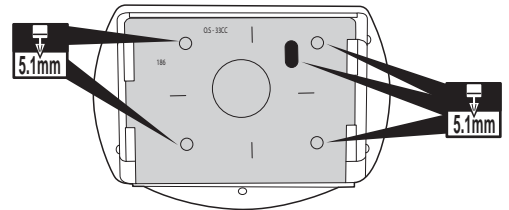
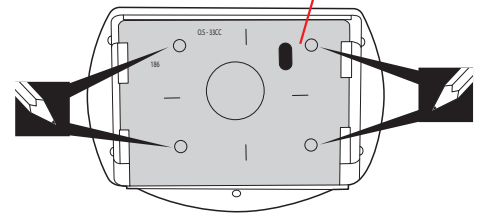


**OS-33CC**



Plate of plywood



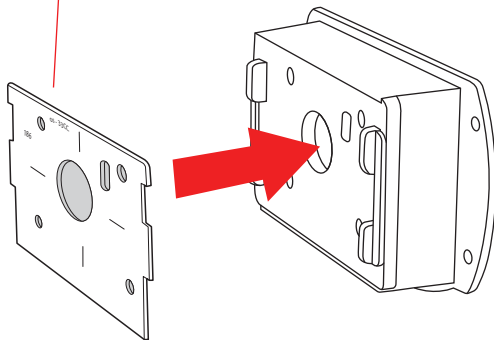


Throttle hole  $\Phi$  6mm

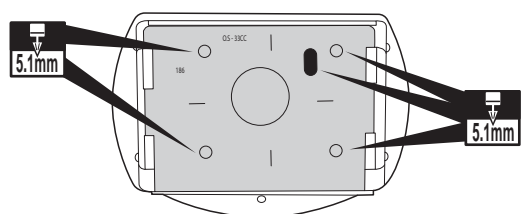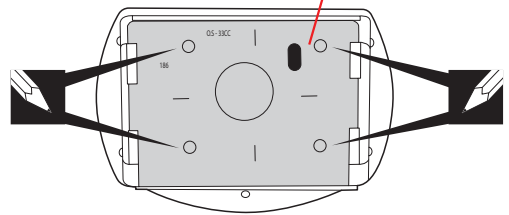


500mm Pushrod wire ----- 1	12x60mm Aluminium ----- 4	5mm Spring Washer ----- 9	5mm Flat Washer ----- 4
Connector (use in page 50) ----- 1	5x16mm Glass Fiber Washer ----- 4	16x5mm Flat Washer ----- 14	5mm Lock Nut ----- 9
5x90mm Socket Head Cap Screw ----- 4	5x25mm Button Head Cap Screw ----- 5	5mm Flat Washer ----- 4	Engin Mount

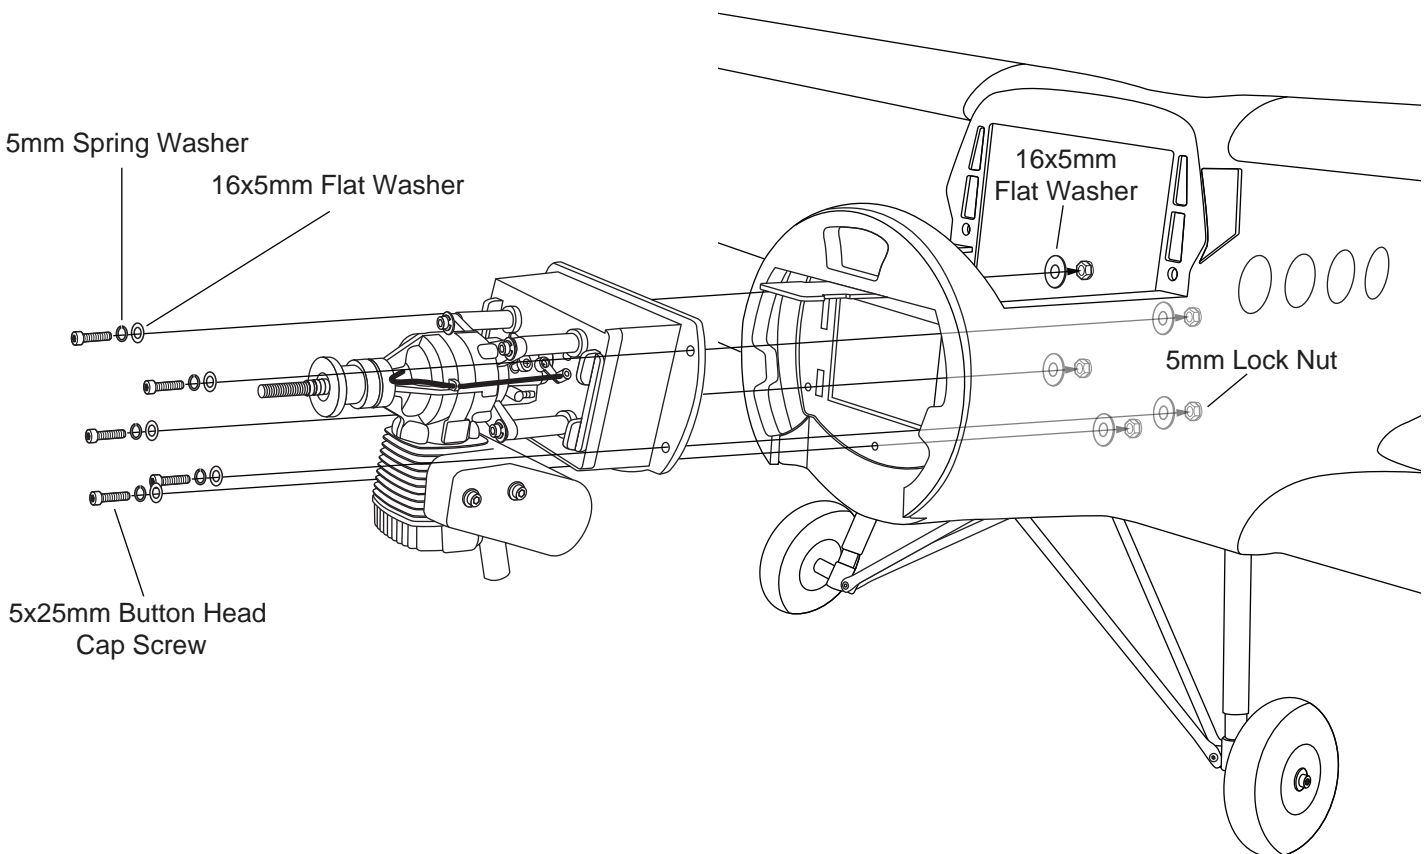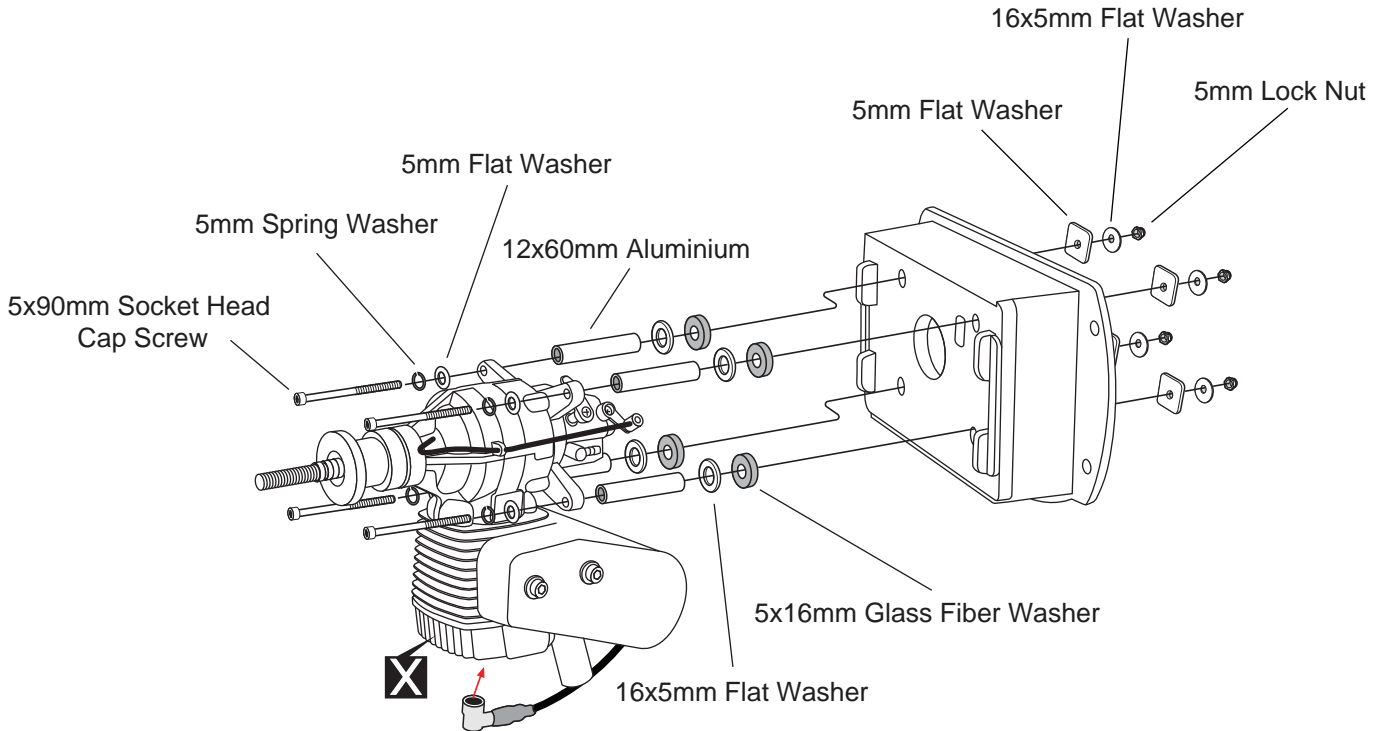

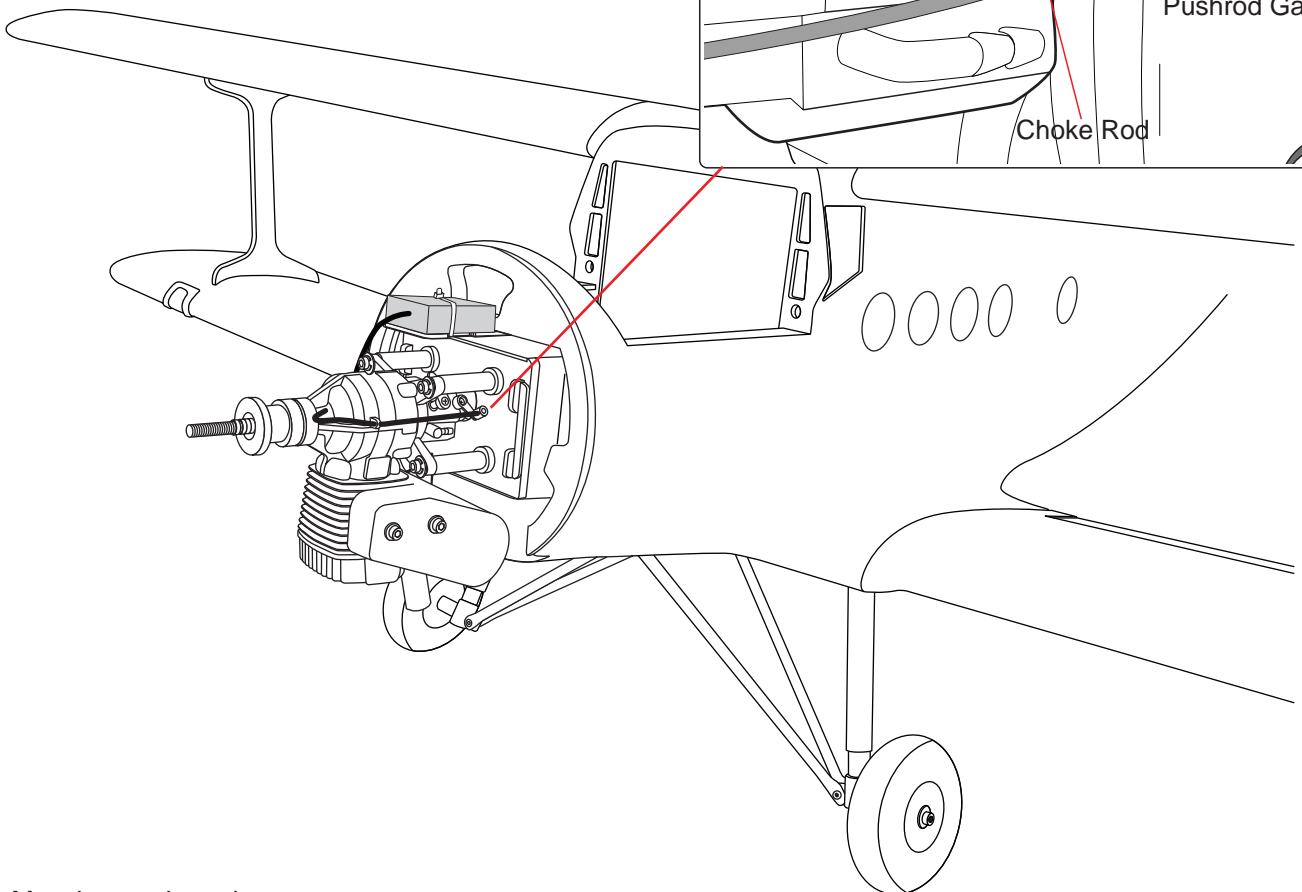
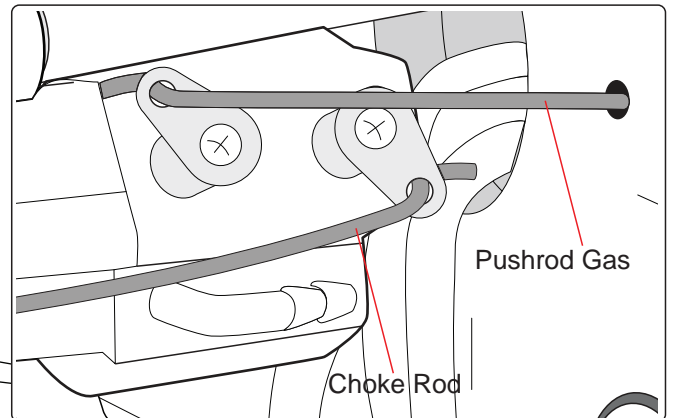
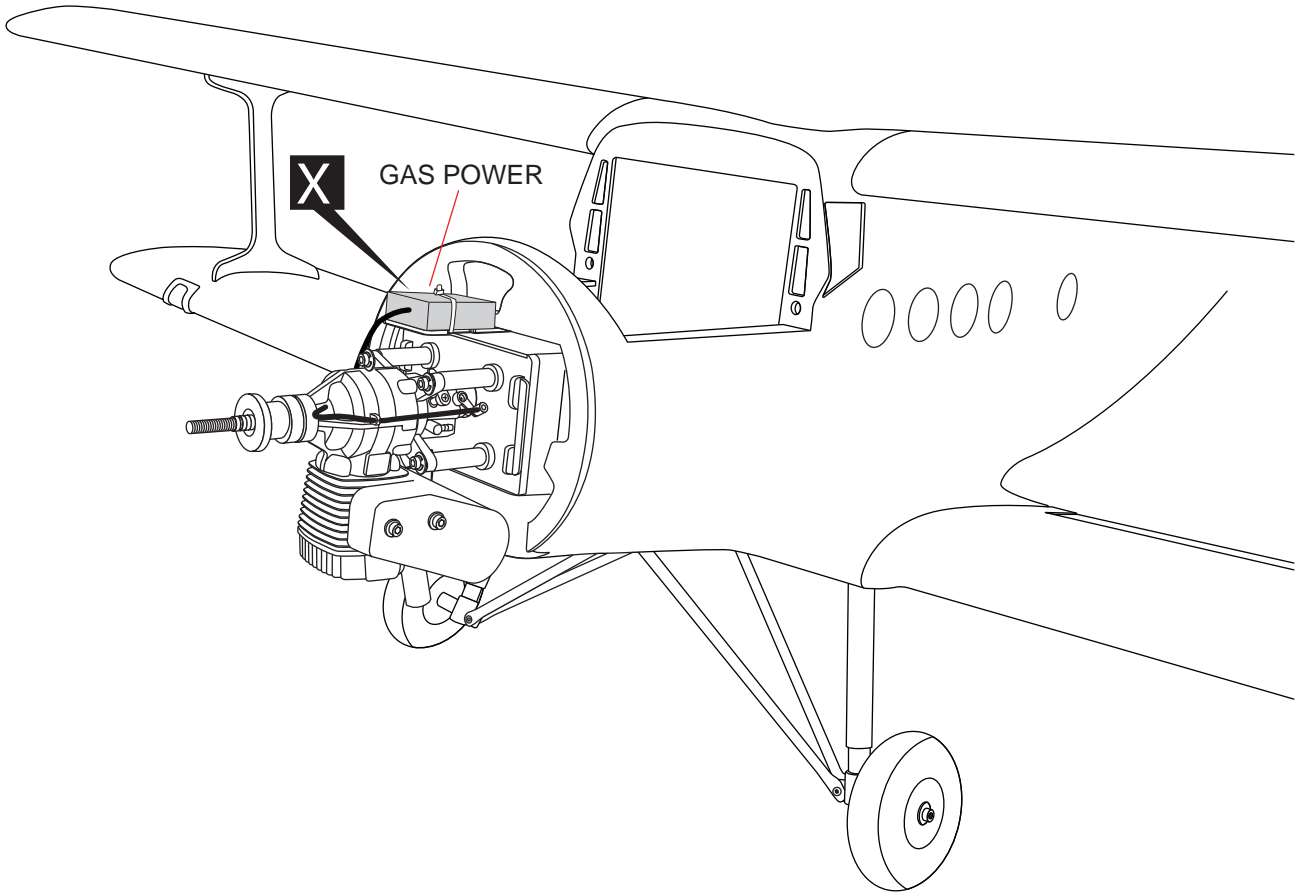


• **ASSEMBLY FUEL TANK GUIDE**


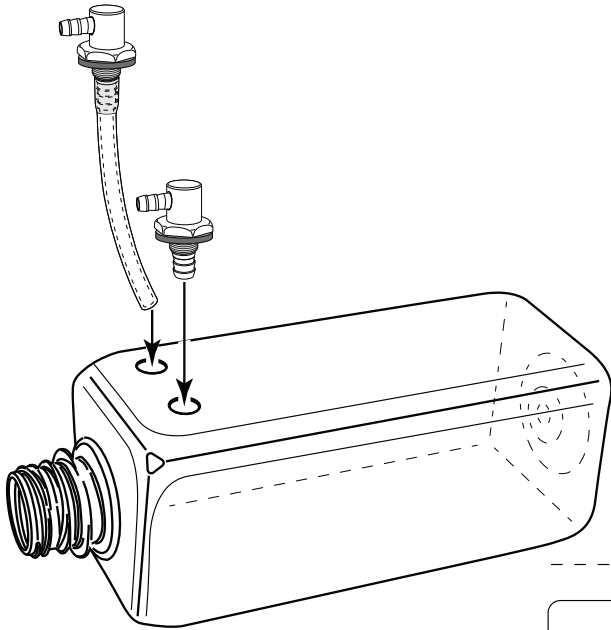


Fuel Tank	1
Rubber washer	4
Full CNC machining	1
	1
	1
	2


Plastic	1
Zip tie	3
Brass pipes	1
Clunks	1
Tygon Fuel Tubing	1

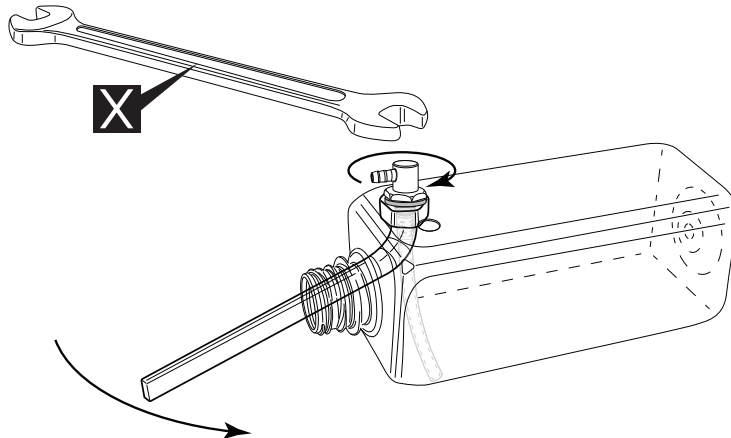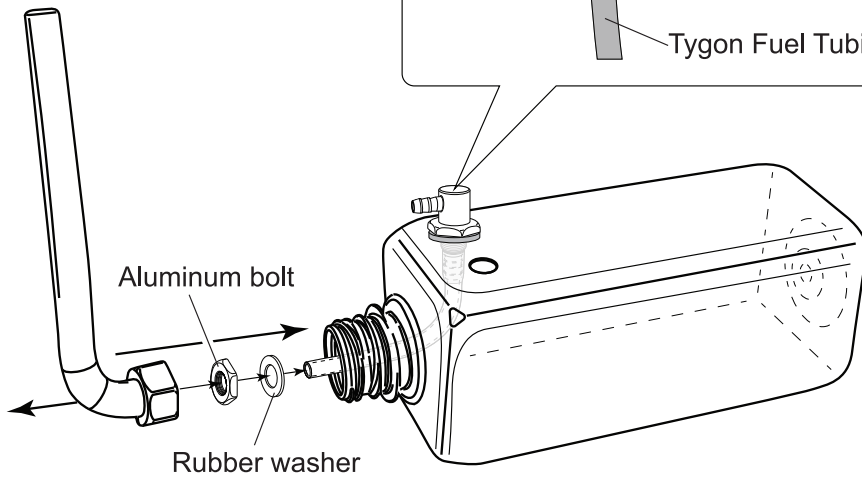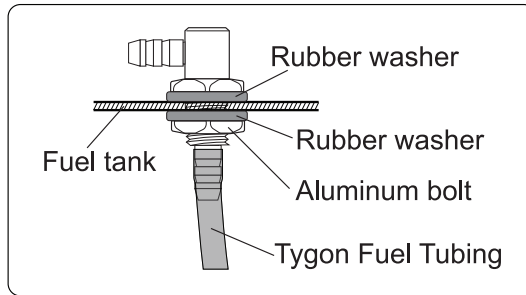

**X** Must be purchased separately!

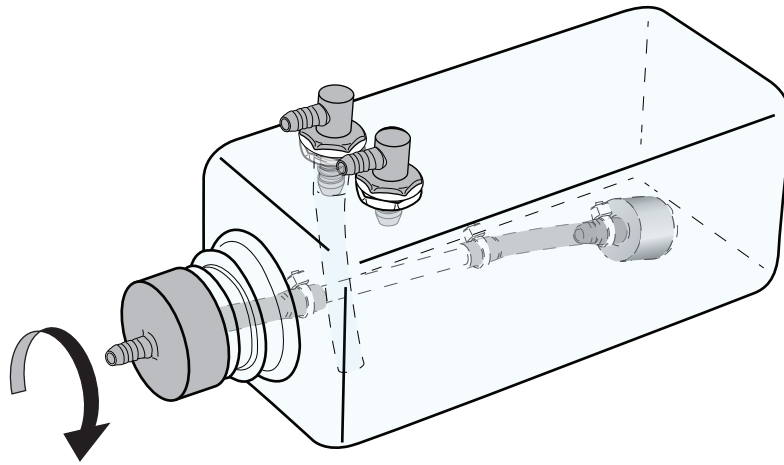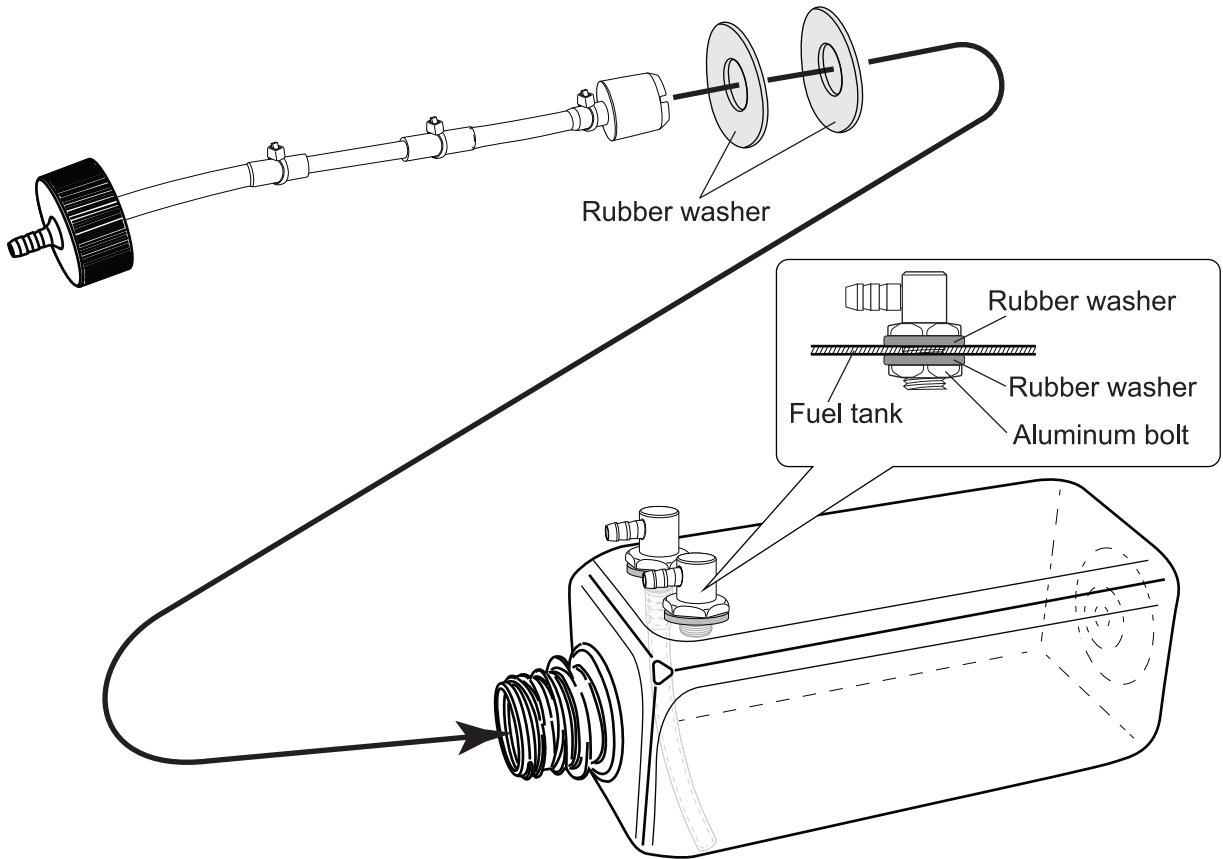

< Front View >

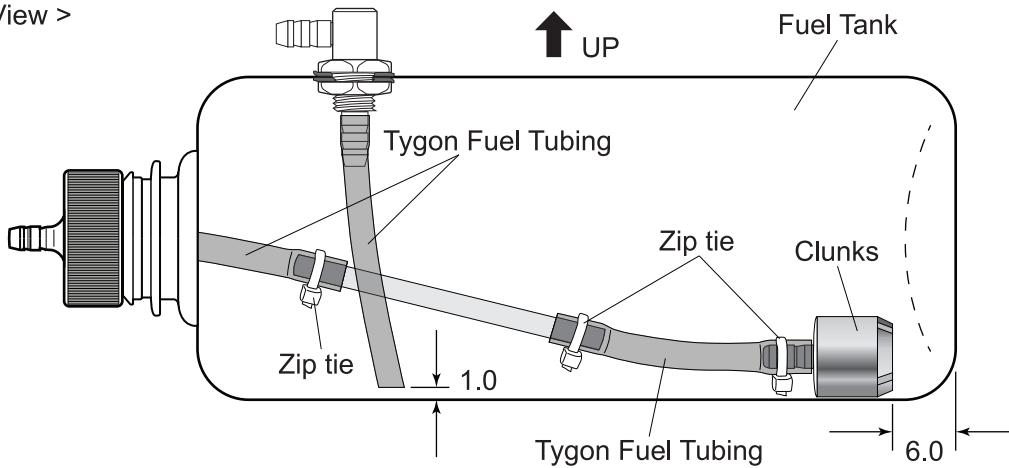



**INSTALLING THE FUEL TANK**

- Using a modeling knife, cut one length of silicon fuel line (the length of silicon fuel line is calculated by how the weighted clunk should rest about 5mm away from the rear of the tank and move freely inside the tank). Connect one end of the line to the weighted clunk and the other end to the nylon pick up tube in the stopper.
- Carefully bend the second nylon tube up at a 45 degree angle (using a cigarette lighter). This tube will be the vent tube to the muffler.
- Carefully bend the third nylon tube down at a 45 degree angle (using a cigarette lighter). This tube will be vent tube to the fueling valve.



*When the stopper assembly is installed in the tank, the top of the vent tube should rest just below the top surface of the tank. It should not touch the top of the tank.*

- Test fit the stopper assembly into the tank. It may be necessary to remove some of the flashing around the tank opening using a modeling knife. If flashing is present, make sure none of it falls into the tank.


- When satisfied with the alignment of the stopper assembly tighten the 3mm x 20mm machine screw until the rubber stopper expands and seals the tank opening. Do not over tighten the assembly as this could cause the tank to split.
- Using a modeling knife, cut 3 lengths of fuel line . Connect 2 lines to the 2 vent tubes and 1 line to the fuel pickup tube in the stopper.
- Feed three lines through the fuel tank compartment and through the pre-drilled hole in the firewall. Pull the lines out from behind the engine, while guiding the fuel tank into place. Push the fuel tank as far forward as possible, the front of the tank should just about touch the back of the firewall.

Blow through one of the lines to ensure the fuel lines have not become kinked inside the fuel tank compartment. Air should flow through easily.





*Do not secure the tank into place permanently until after balancing the airplane. You may need to remove the tank to mount the battery in the fuel tank compartment.*

- Secure the fuel tank.

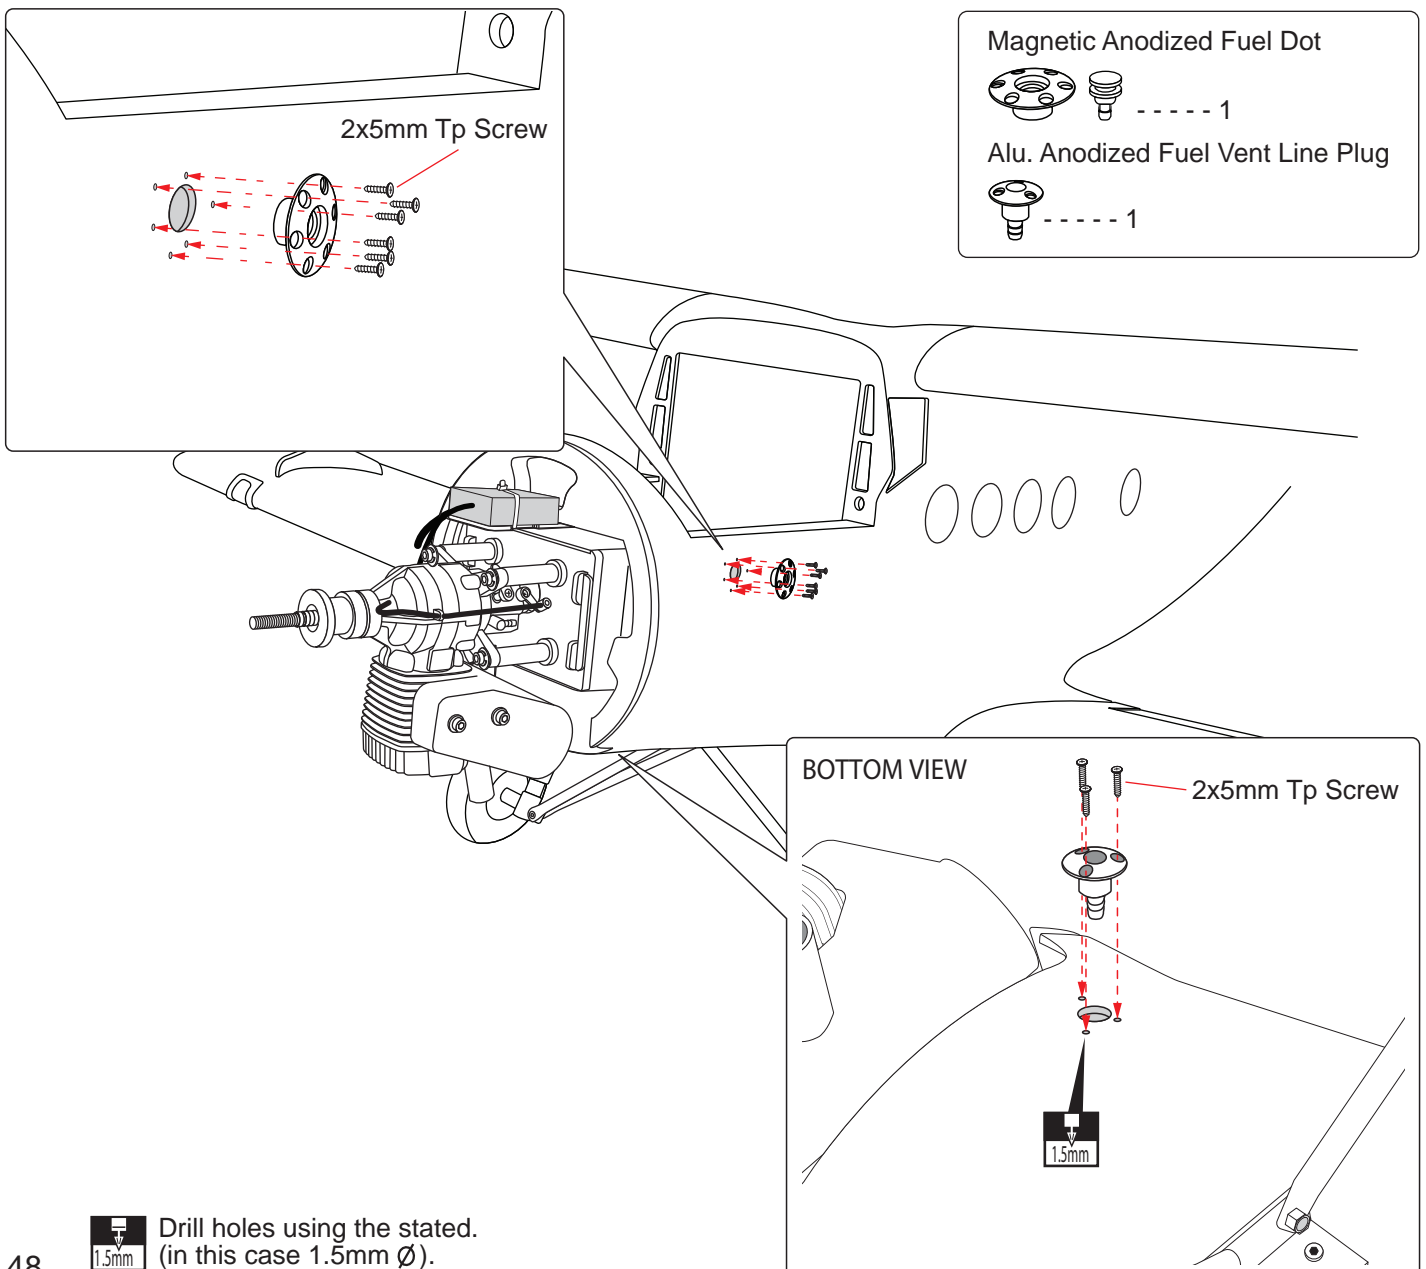

Drill holes using the stated.  
(in this case 1.5mm Ø).

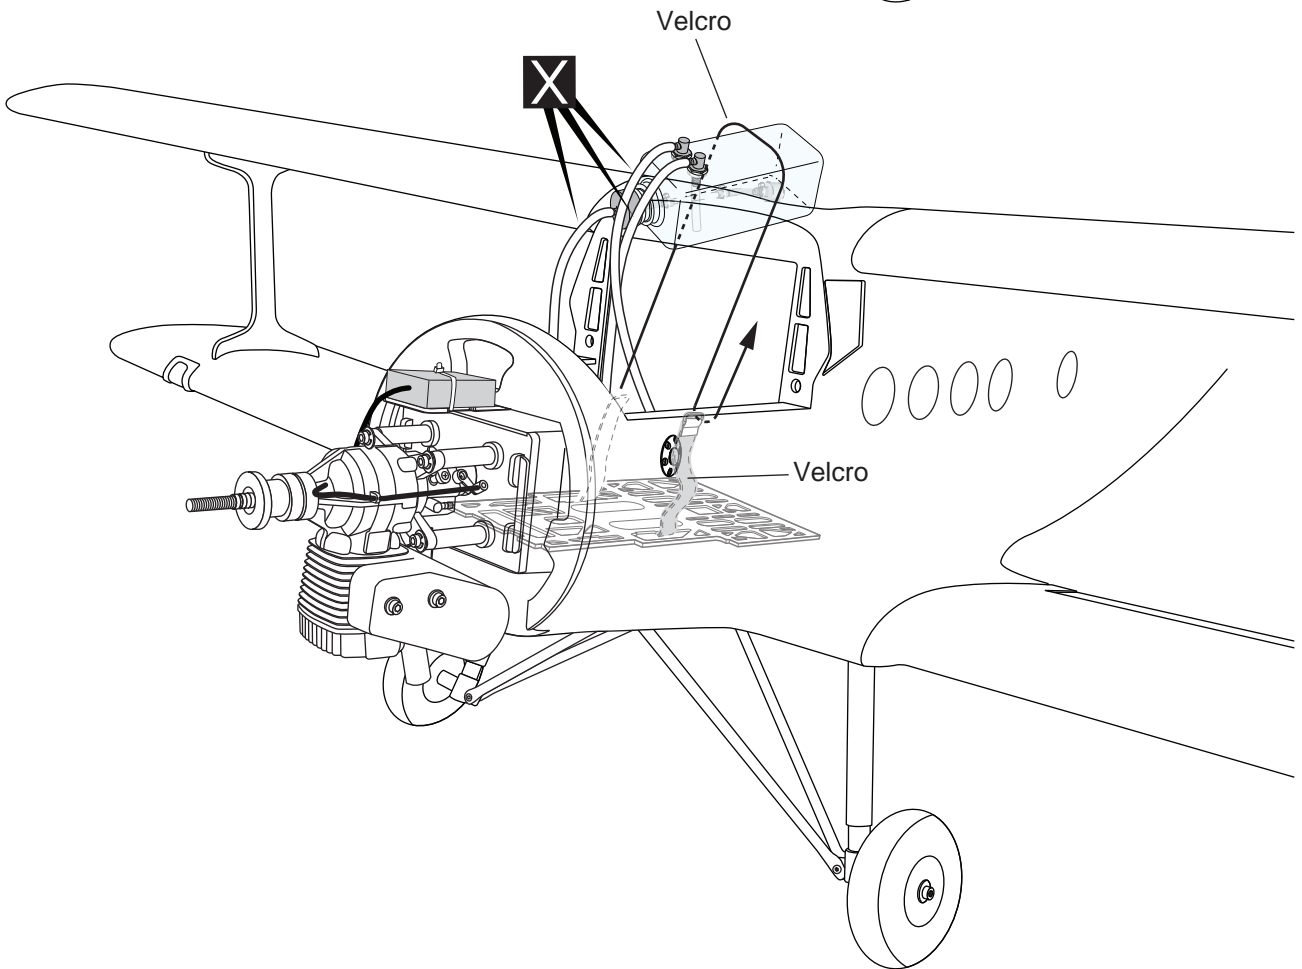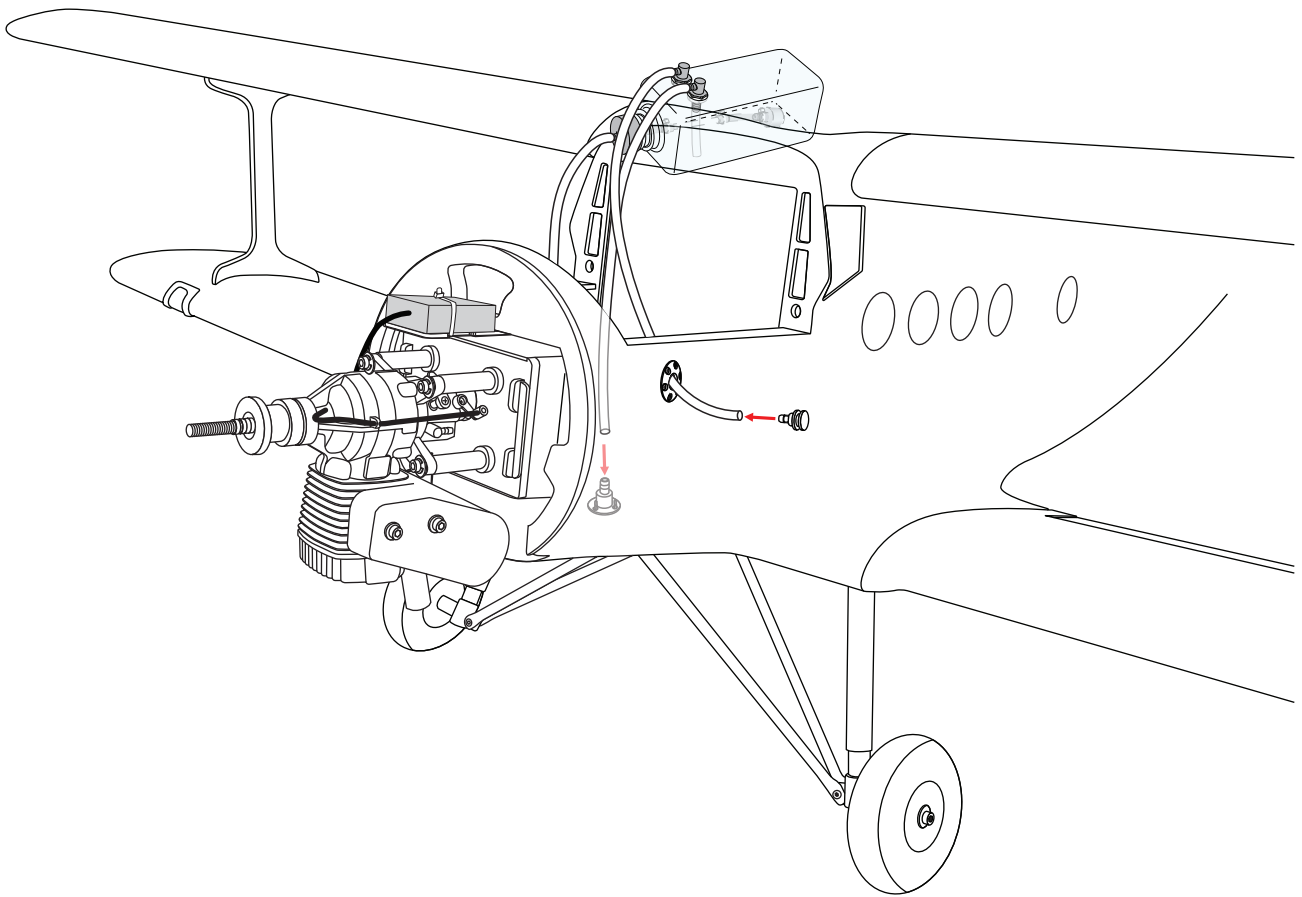

## INSTALLING THE THROTTLE

1) Install one adjustable metal connector through the third hole out from the center of one servo arm, enlarge the hole in the servo arm using a 2mm drill bit to accommodate the servo connector. Remove the excess material from the arm.


**⚠ After installing the adjustable metal connector apply a small drop of thin C/A to the bottom nut. This will prevent the connector from loosening during flight.**

2) Plug the throttle servo into the receiver and turn on the radio system. Check to ensure that the throttle servo output shaft is moving in the correct direction. When the throttle stick is moved forward from idle to full throttle, the throttle barrel should also open and close using this motion. If not, reverse the direction of the servo, using the transmitter.





3) Slide the adjustable metal connector / servo arm assembly over the plain end of the pushrod wire. Position the throttle stick and the throttle trim at their lowest positions.

4) Manual push the carburetor barrel fully closed. Angle the arm back about 45 degree from center and attach the servo arm onto the servo. With the carburetor barrel fully closed, tighten the set screw in the adjustable metal connector.

5) Remove the excess throttle pushrod wire using wire cutters and install the servo arm retaining screw.

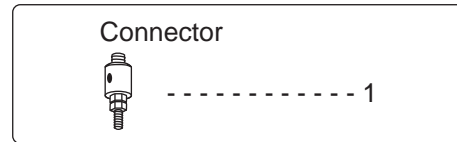

Adjust the throttle input (transmitter throttle stick), throttle trim movement and the carburetor opening to the suitable position and screw in the 4x4mm set screw.

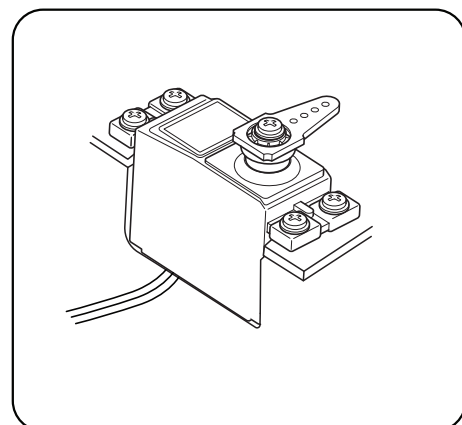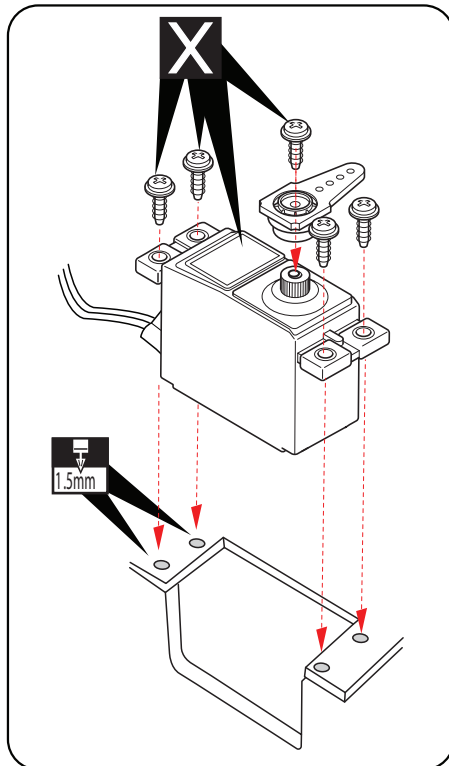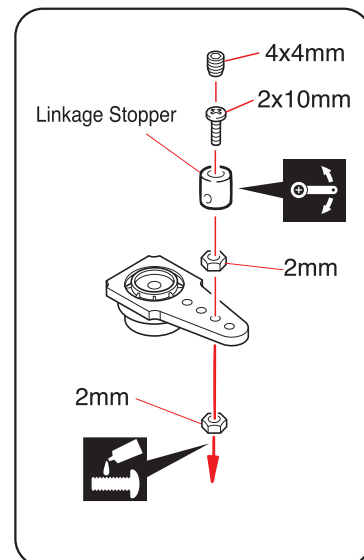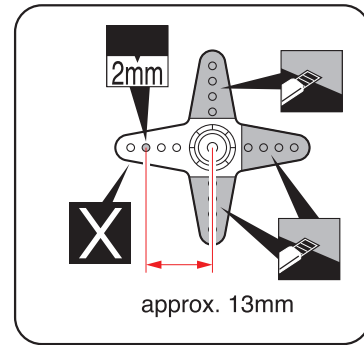

Cut off shaded portion



Ensure smooth, non-binding movement when assembling




Apply threadlocker (screw cement).







Drill holes using the stated. (in this case 1.5mm $\varnothing$ , 2mm $\varnothing$ ).



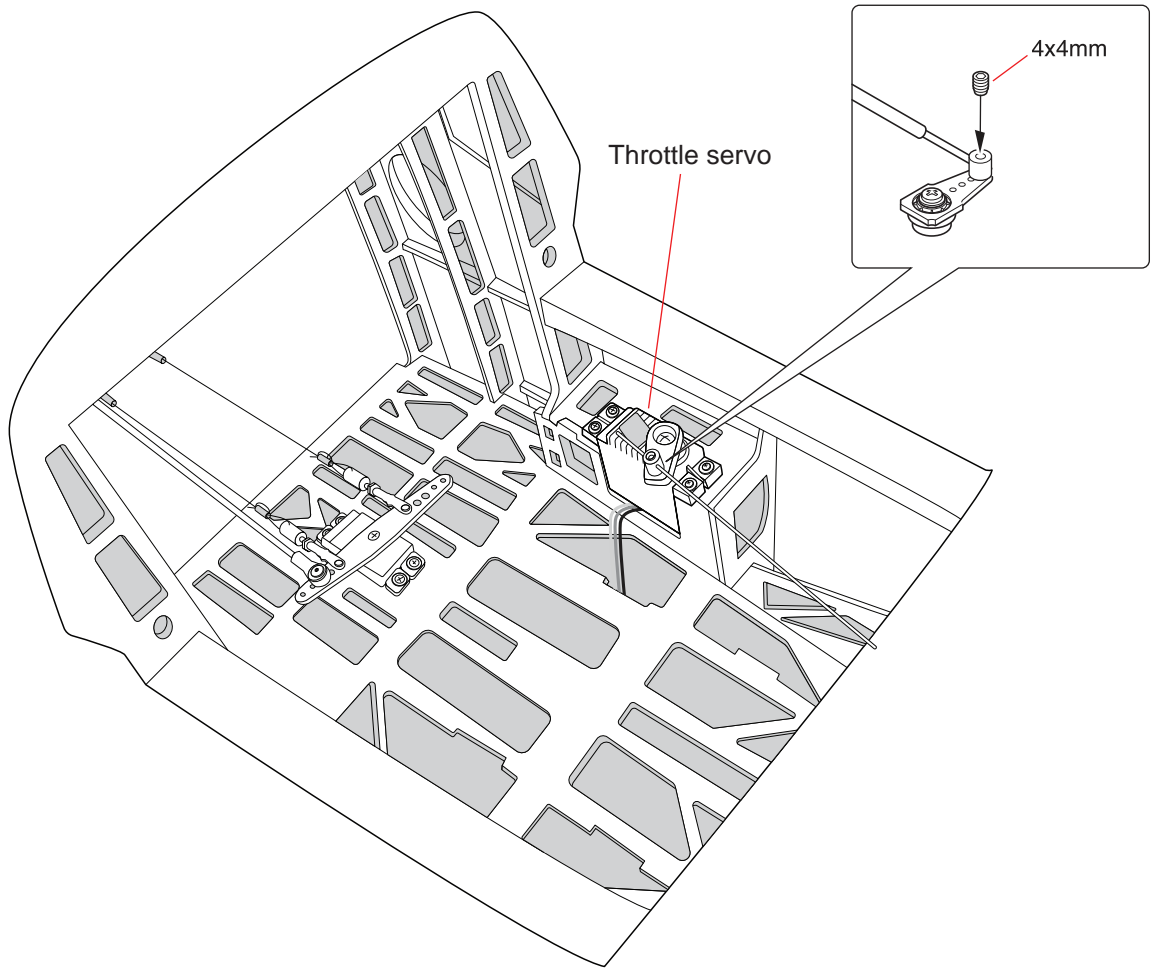


Must be purchased separately!



### MOUNTING THE COWLING



- |  |   |
|--|---|
| 3x12mm Tp Screw<br> --- 8 | 3x12mm Button Head Cap Screw<br> ----- 4 |
| Plastic<br> ----- 4       | 3mm Flat Washer<br> ----- 4              |

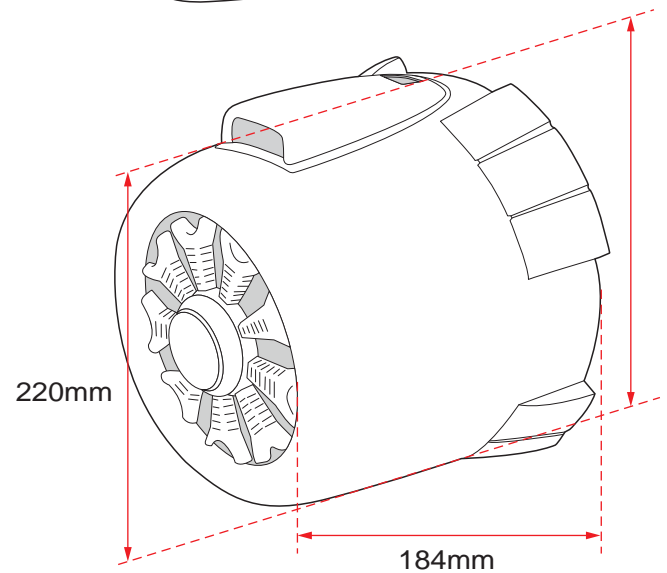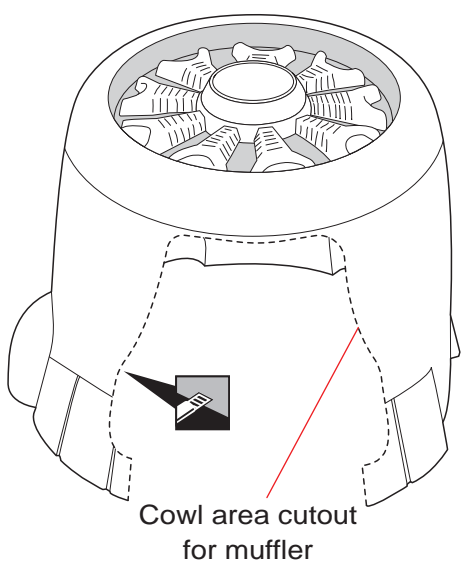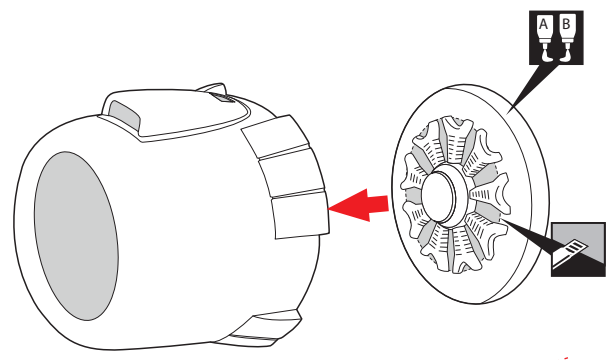


Apply epoxy glue.




Cut off shaded portion carefully.

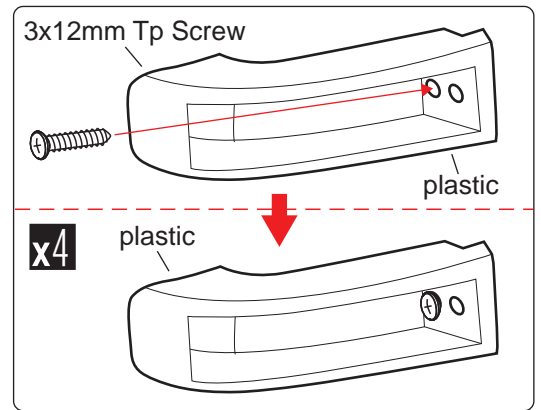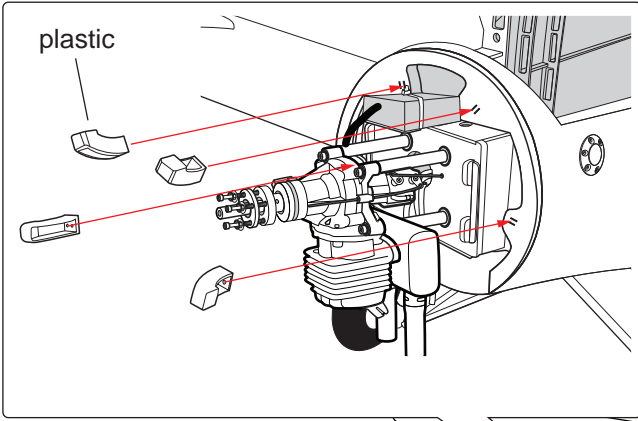

TOP VIEW

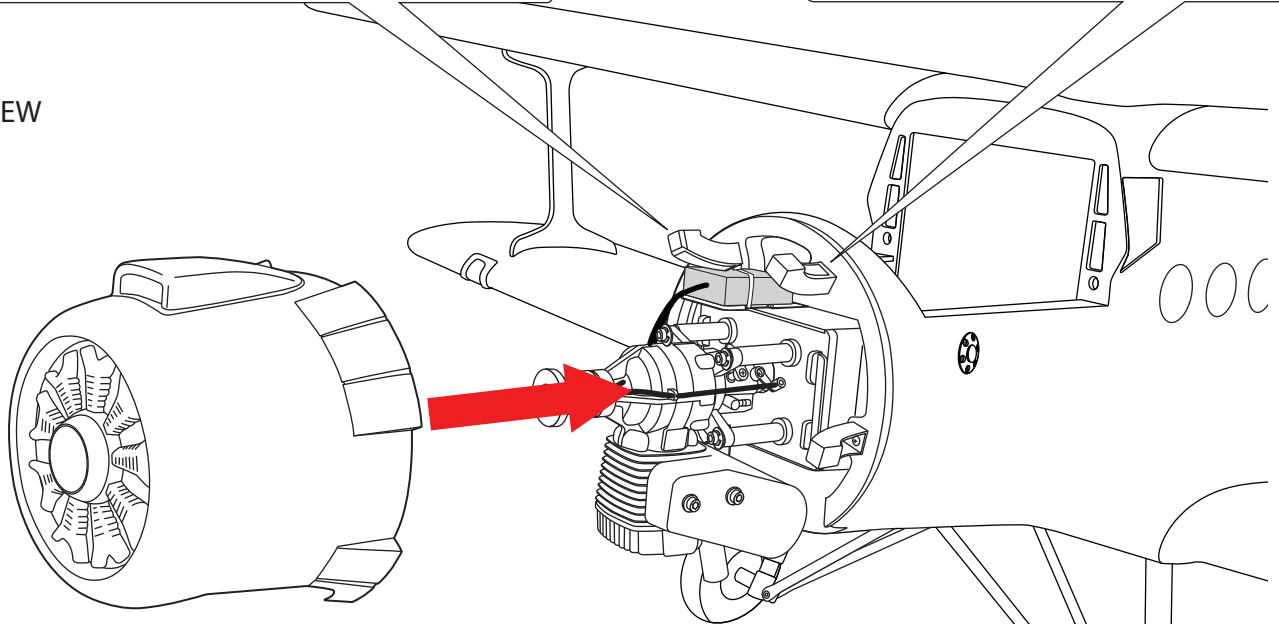


TOP VIEW

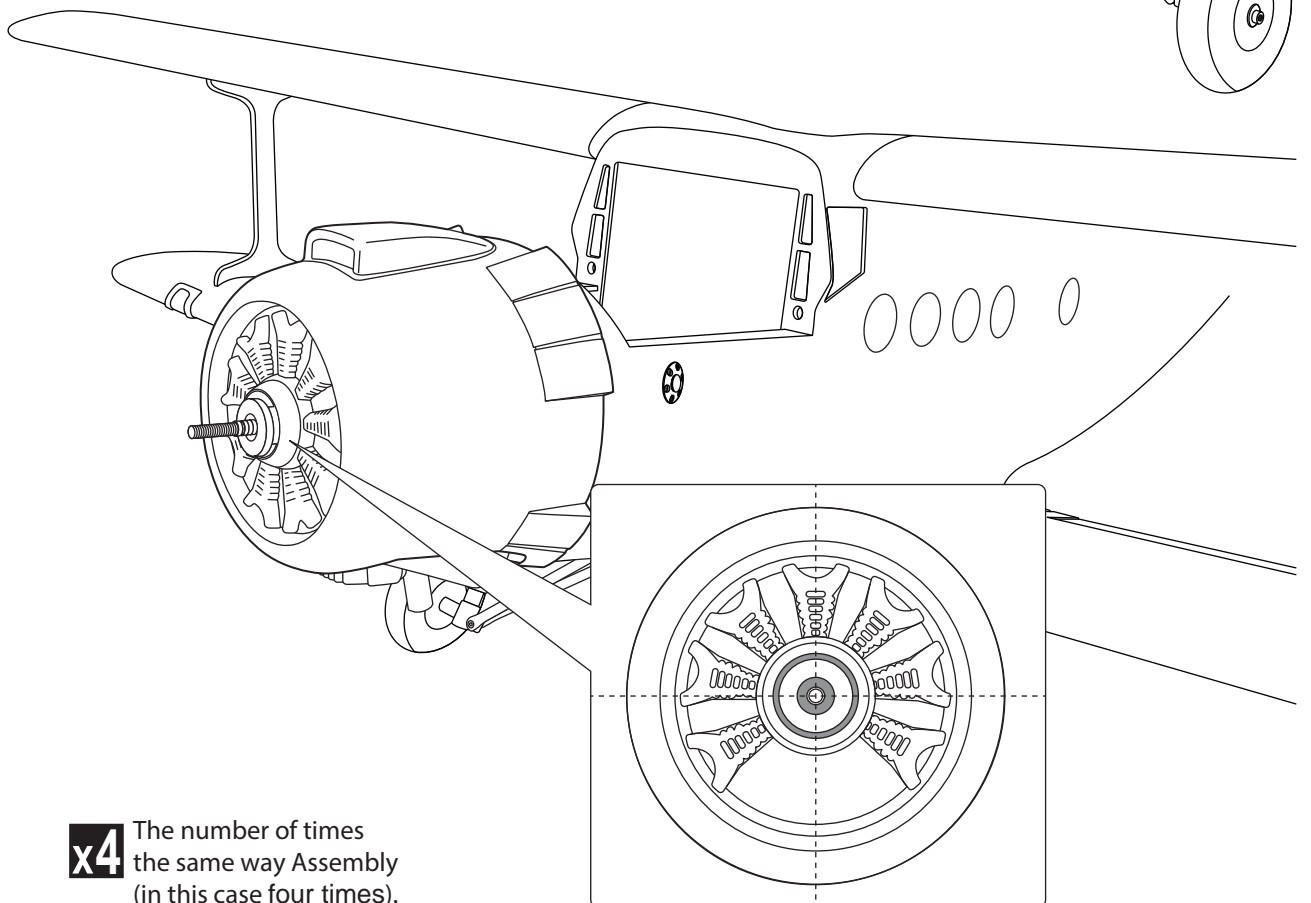


**x4** The number of times the same way Assembly (in this case four times).

TOP VIEW


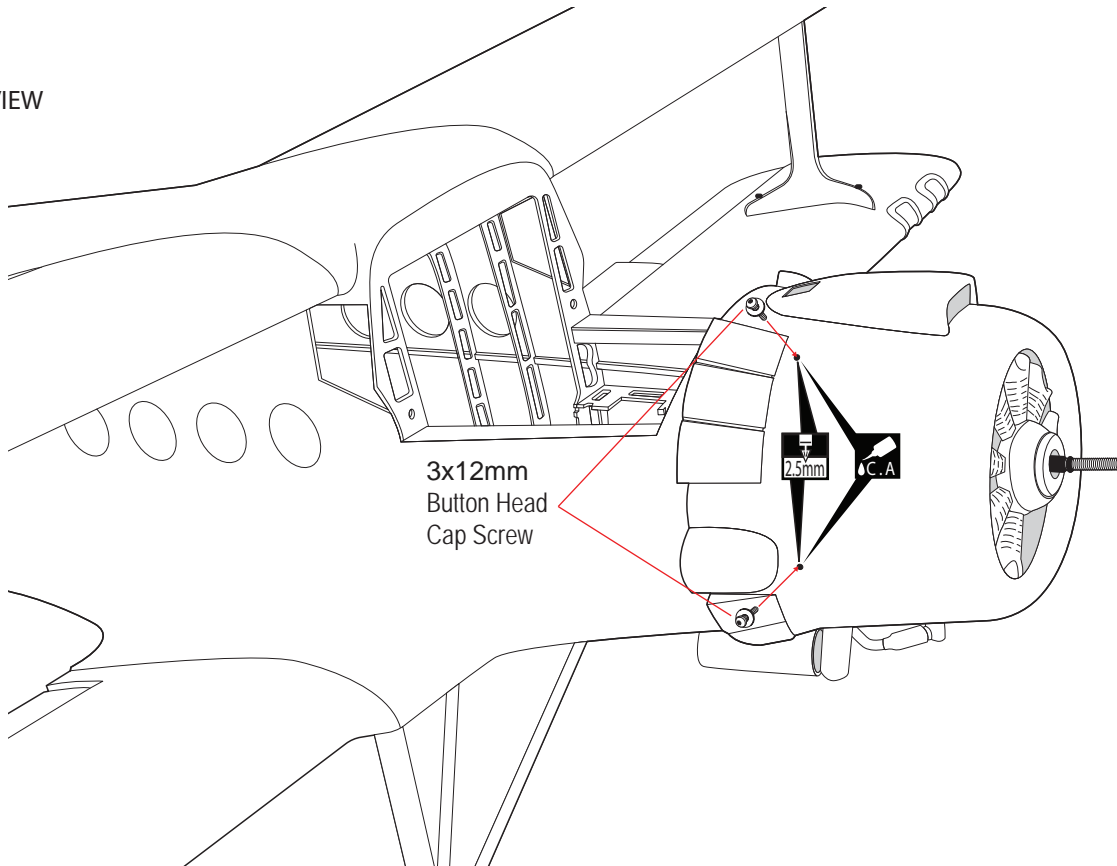


TOP VIEW

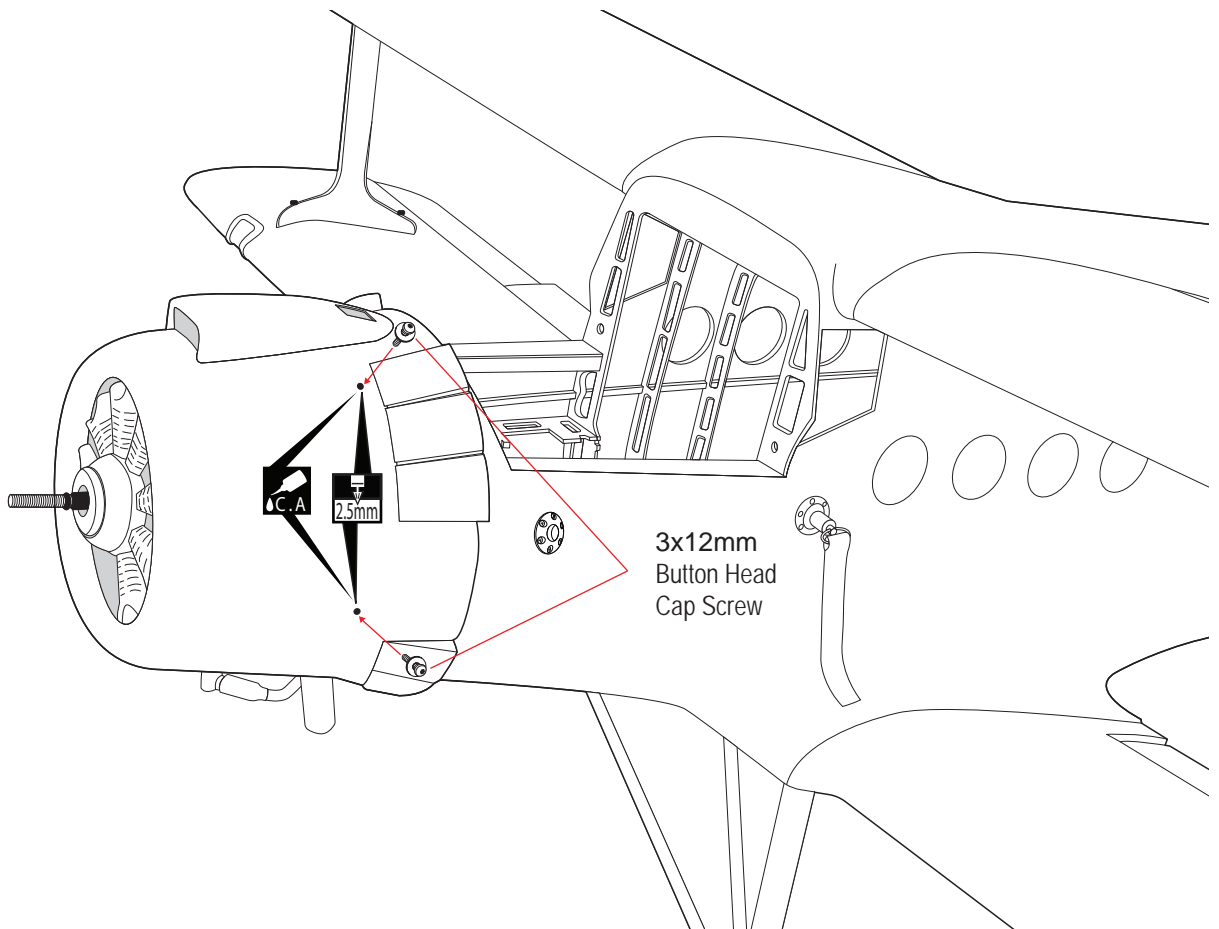




Plastic parts right fuselage

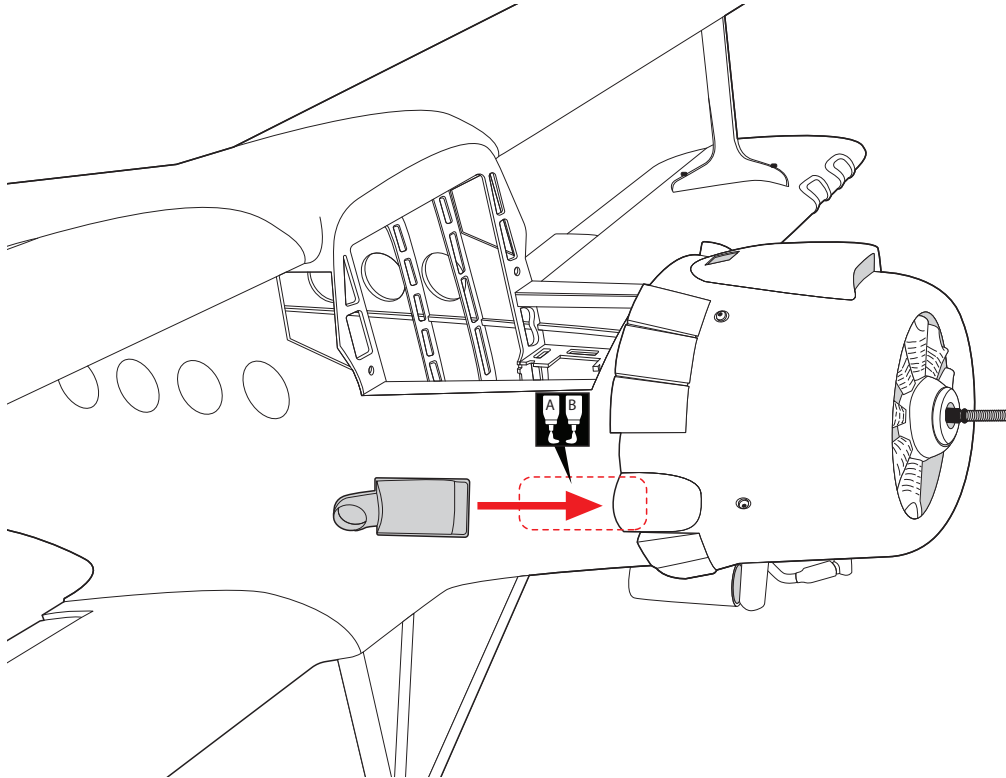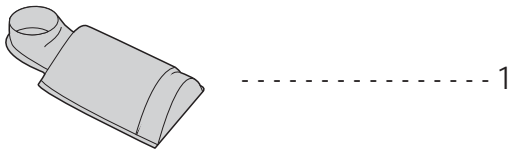


TOP VIEW

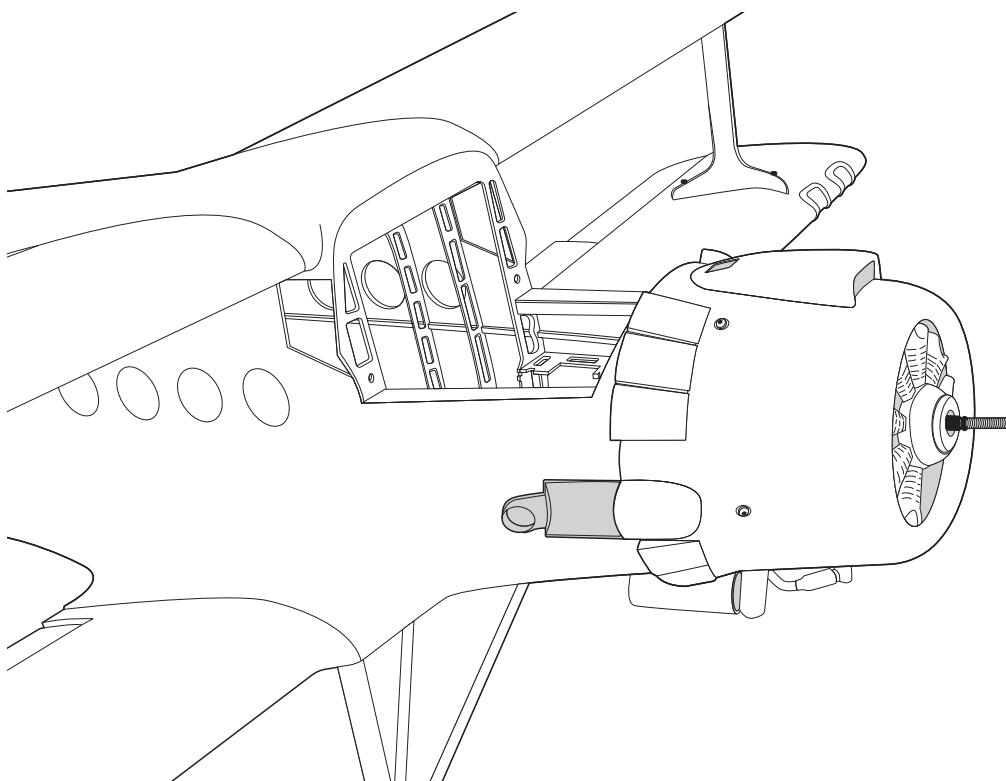


TOP VIEW




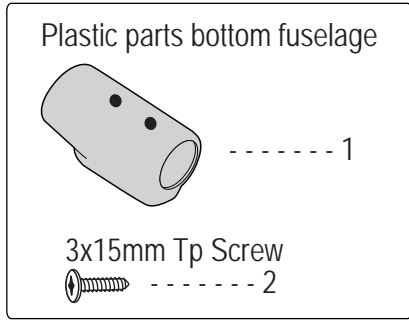

BOTTOM VIEW

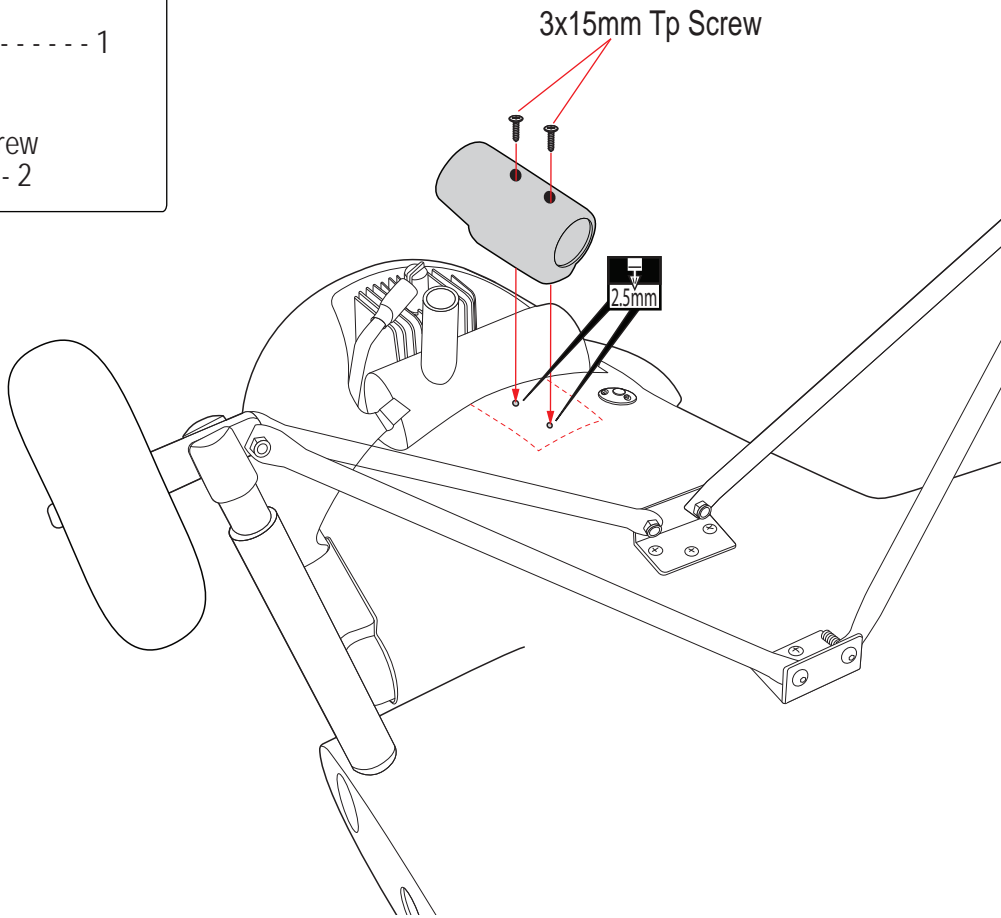

BOTTOM VIEW

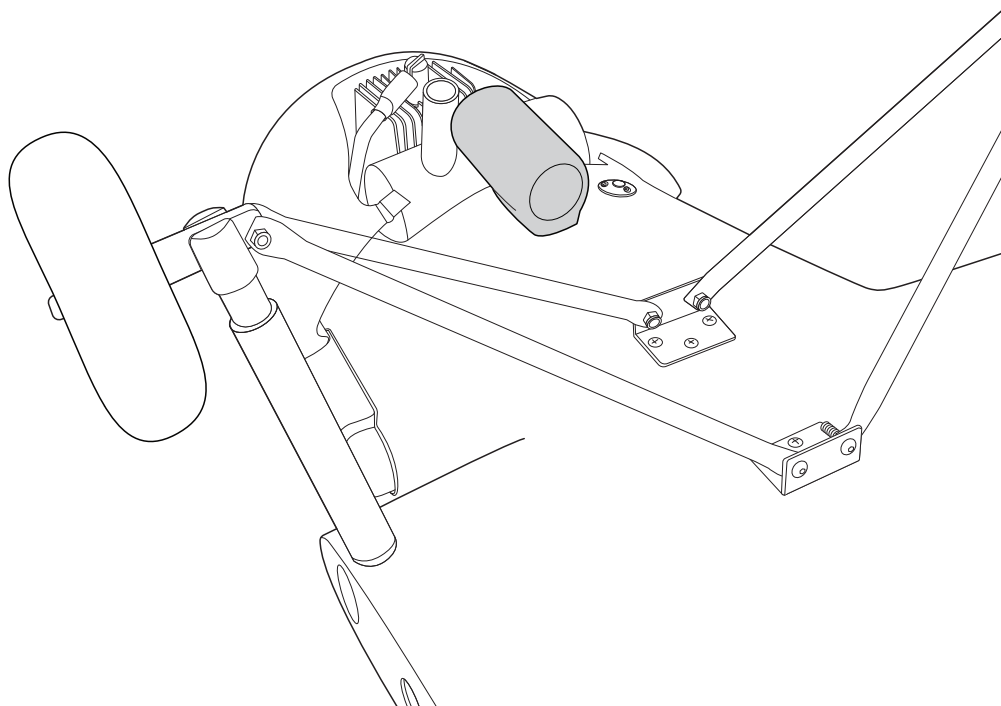




**INSTALLING THE SWITCH, RECEIVER AND BATTERY**

1) Plug the servo leads and the switch lead into the receiver. You may want to plug an aileron extension into the receiver to make plugging in the aileron servo lead easier when you are installing the wing. Plug the battery pack lead into the switch.

2) Wrap the receiver and battery pack in the protective foam to protect them from vibration. Use a rubber band or masking tape to hold the foam in place.

 Do not permanently secure the receiver and battery until after balancing the model.


**INSTALLING THE SWITCH**

1) The switch should be mounted on the fuselage side, opposite the muffler, close enough to the receiver so the lead will reach. Use the face plate of the switch cut out and locate the mounting holes.

2) Cut out the switch hole using a modeling knife. Use a 2mm drill bit and drill out the two mounting holes through the fuselage side.






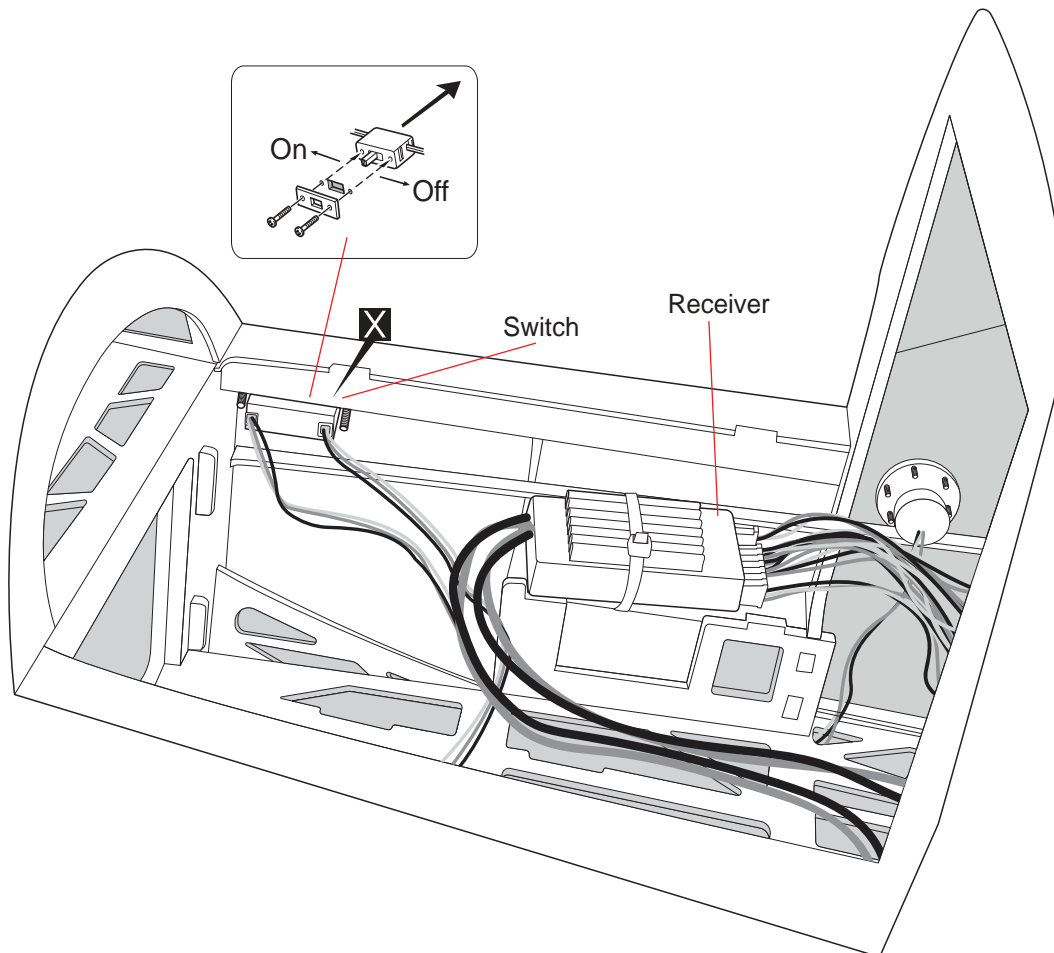





3) Secure the switch in place using the two machine screws provided with the radio system.




TOP VIEW





► Attach securely. Disconnection during flight will cause loss of control and may result in an accident

**INSTALLING THE ELECTRIC MOTOR (EP VERSION)**


<p>Battery Tray   --- 1</p> <p>6x25mm Plastic Screw   --- 3</p> <p>4x20mm Button Head Cap Screw   --- 4</p>	<p>4mm Spring Washer   ----- 4</p> <p>4mm Flat Washer   ----- 4</p> <p>16x5mm Flat Washer   ----- 10</p>	<p>5x25mm Button Head Cap Screw   ----- 5</p> <p>5mm Spring Washer   ----- 5</p> <p>M4 Blind Nut   ----- 4</p>	<p>5mm Lock Nut   ----- 5</p> <p>Motor Mount  </p>
--	---	---	--

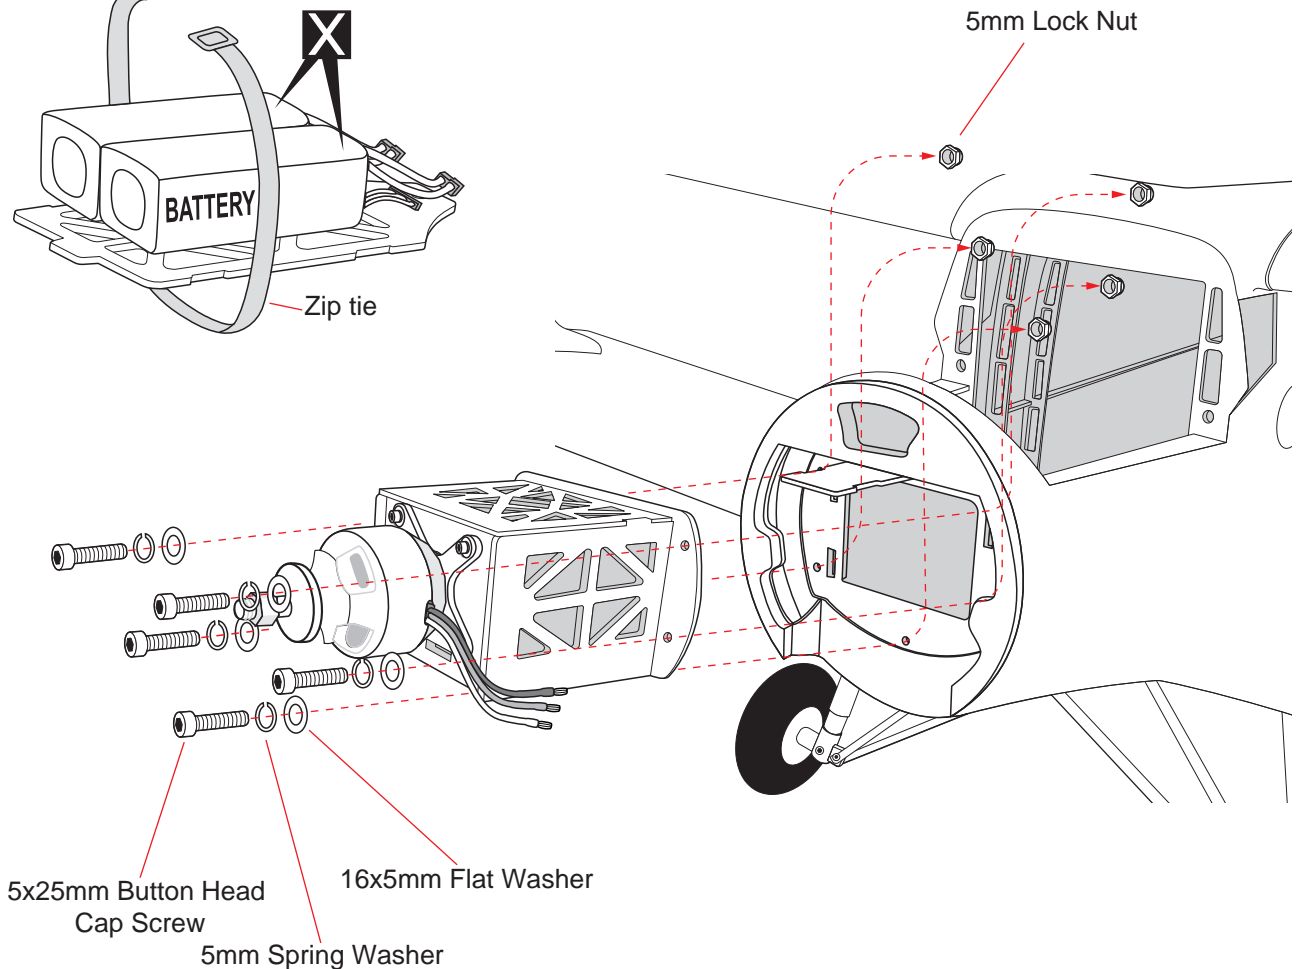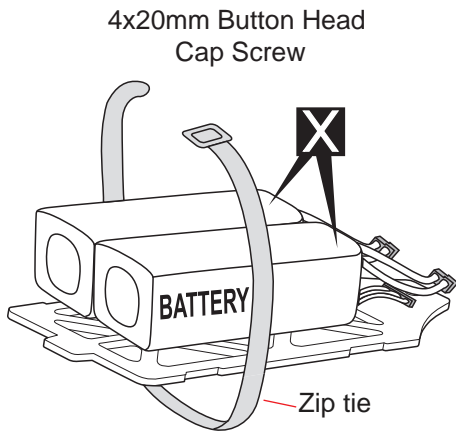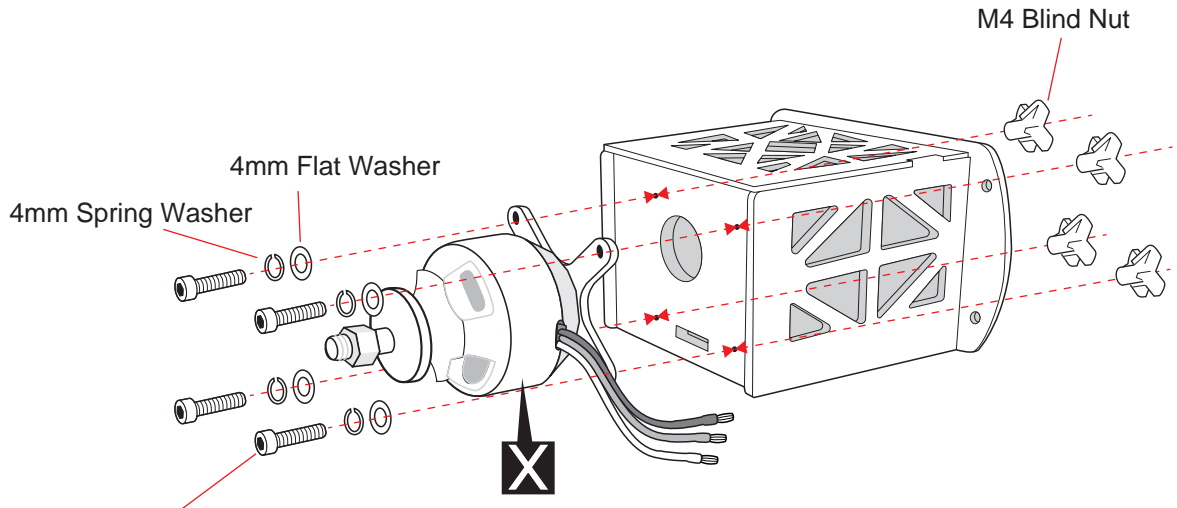


6x25mm Plastic Screw

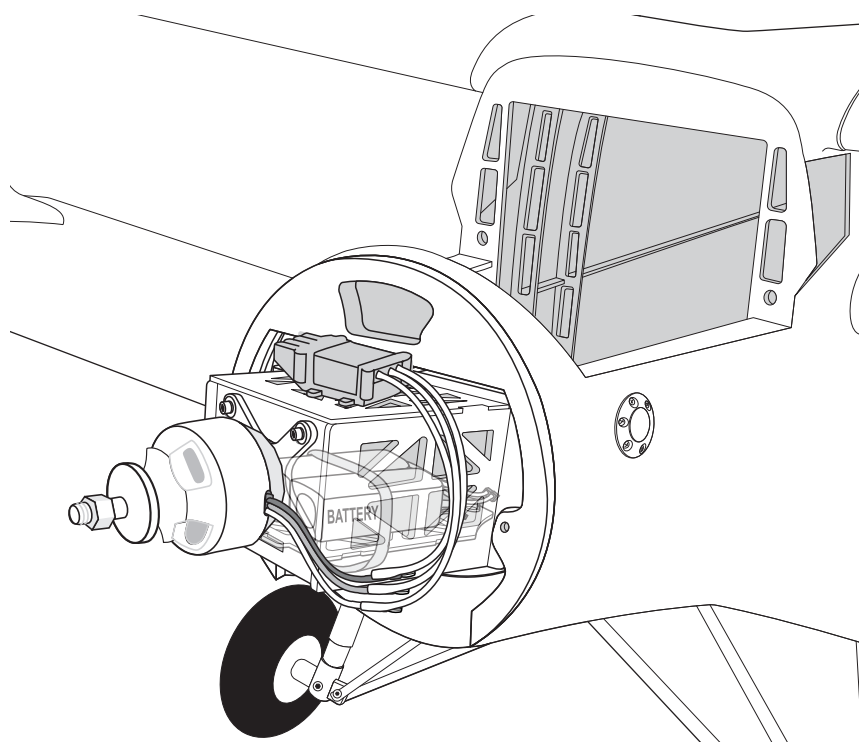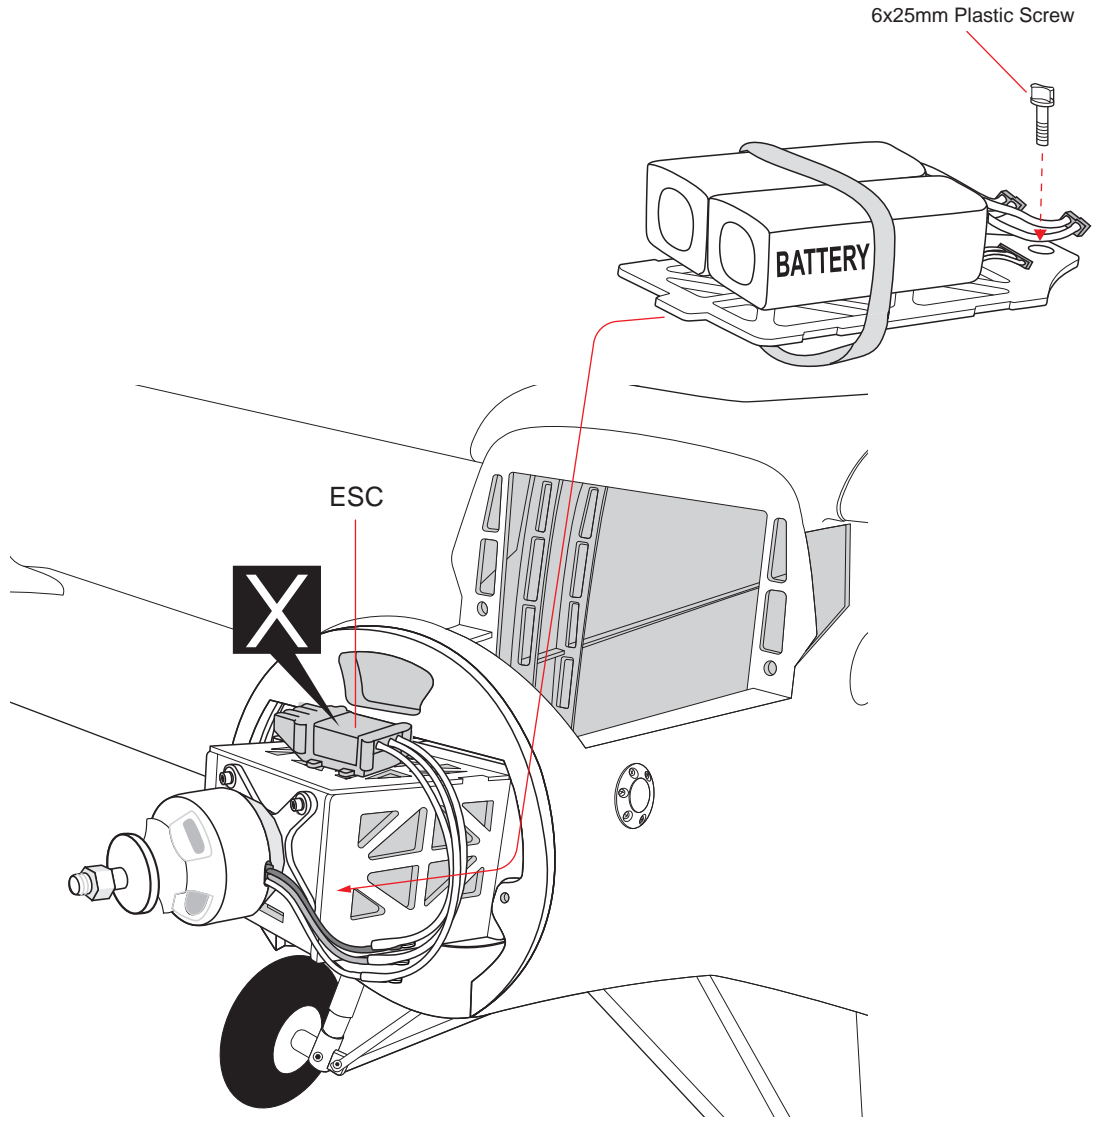


**INSTALLING THE COCKPIT**

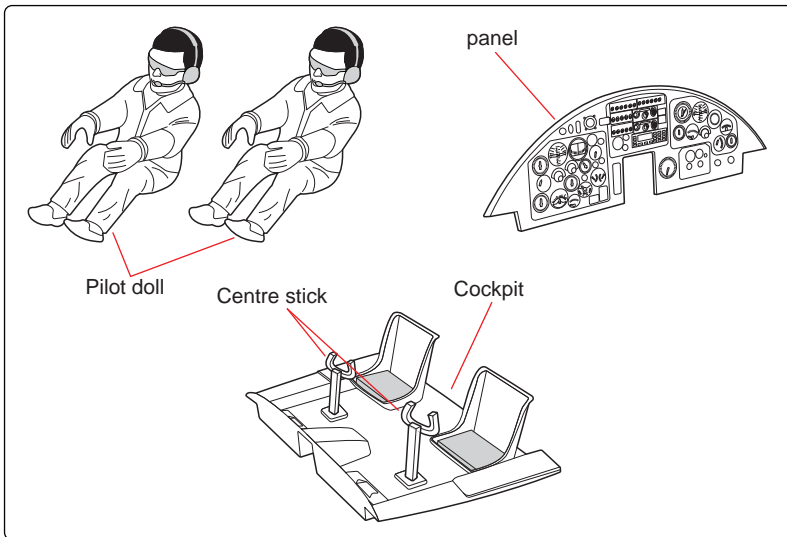


TOP VIEW

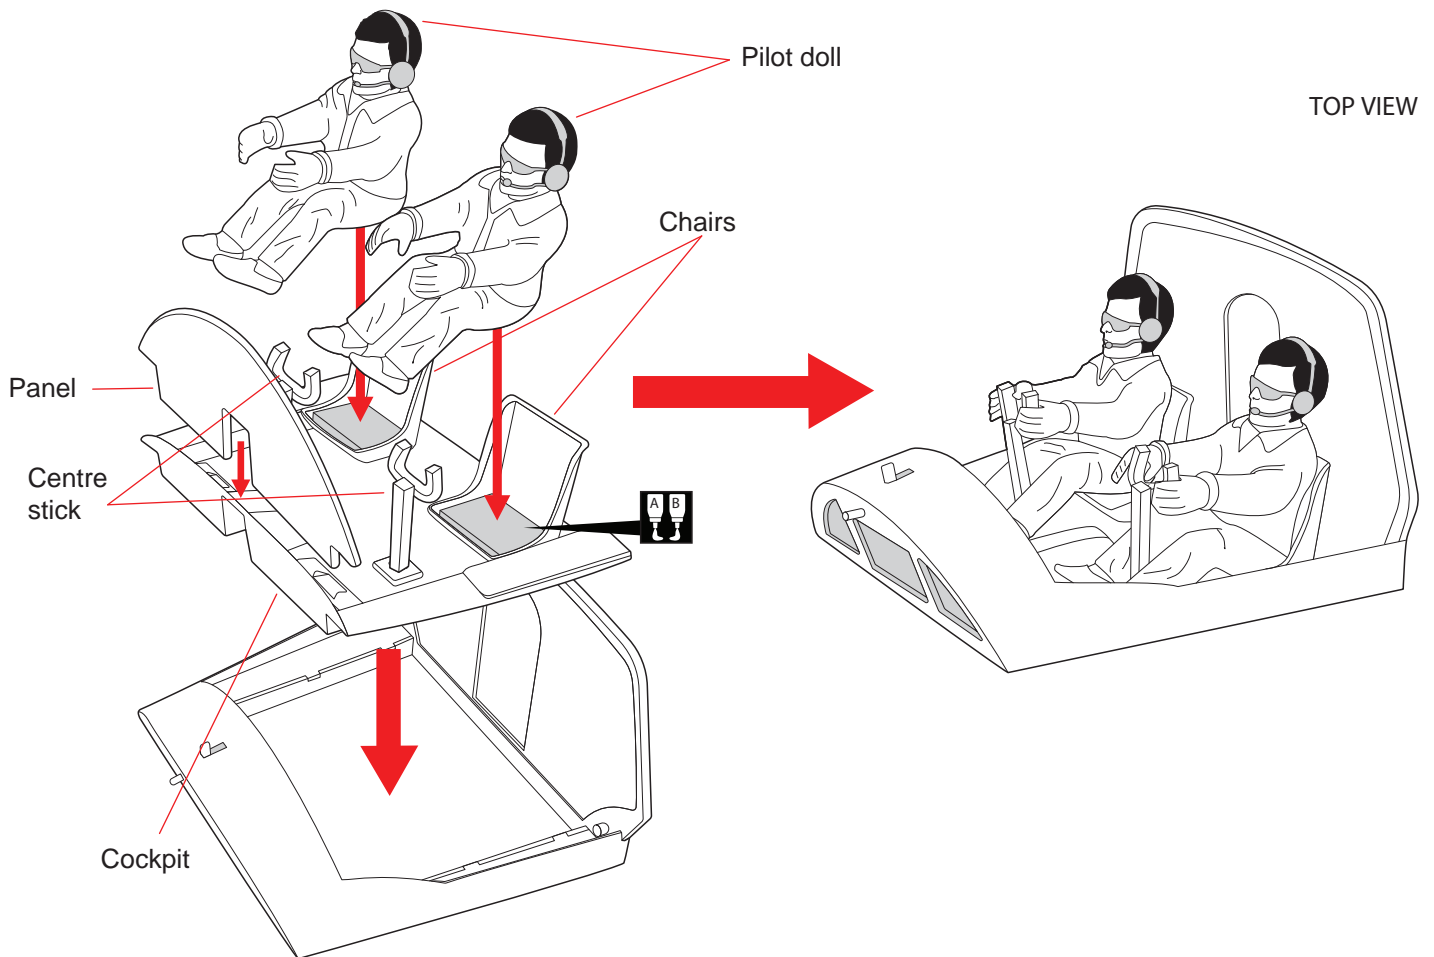


TOP VIEW

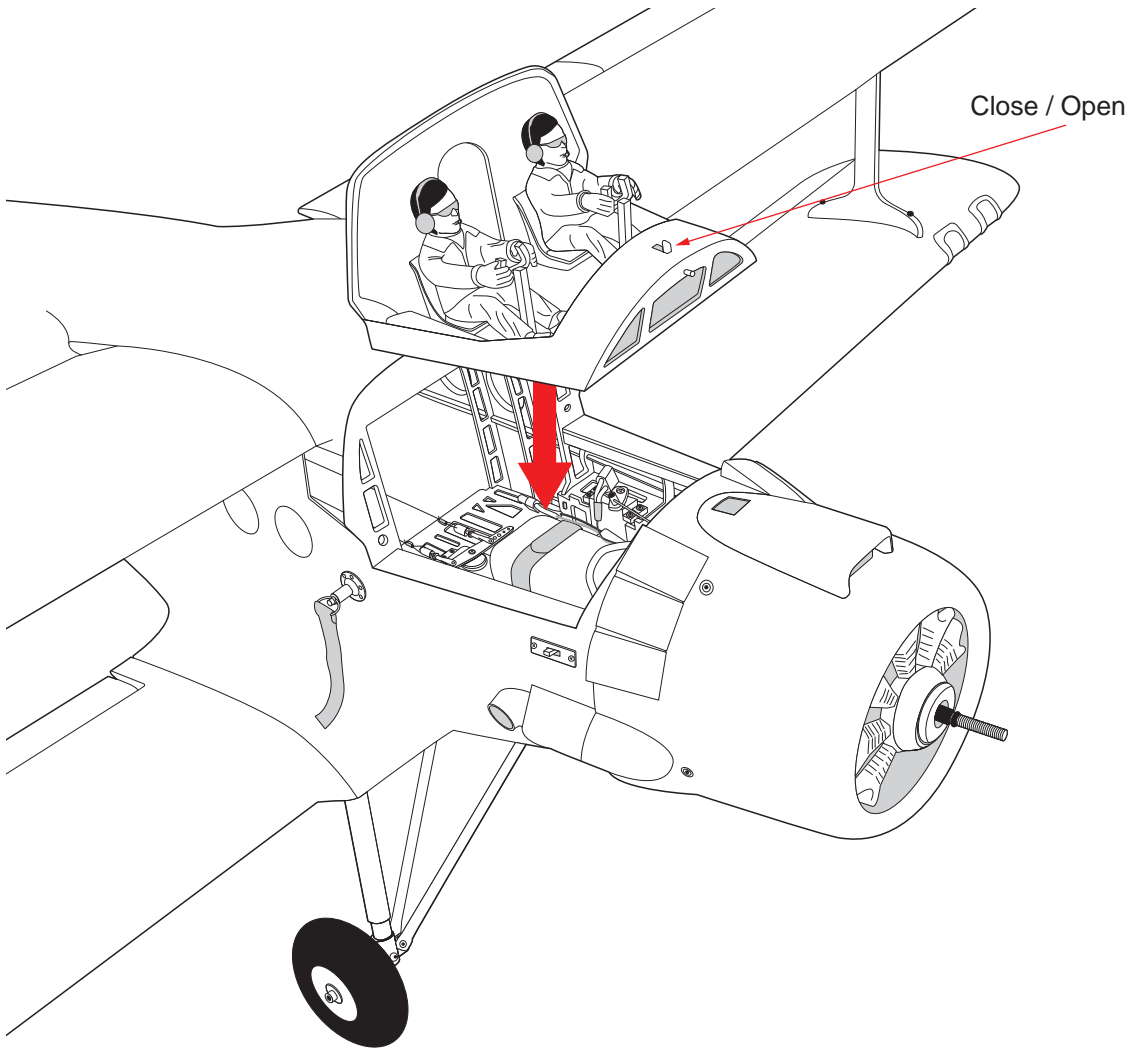


TOP VIEW

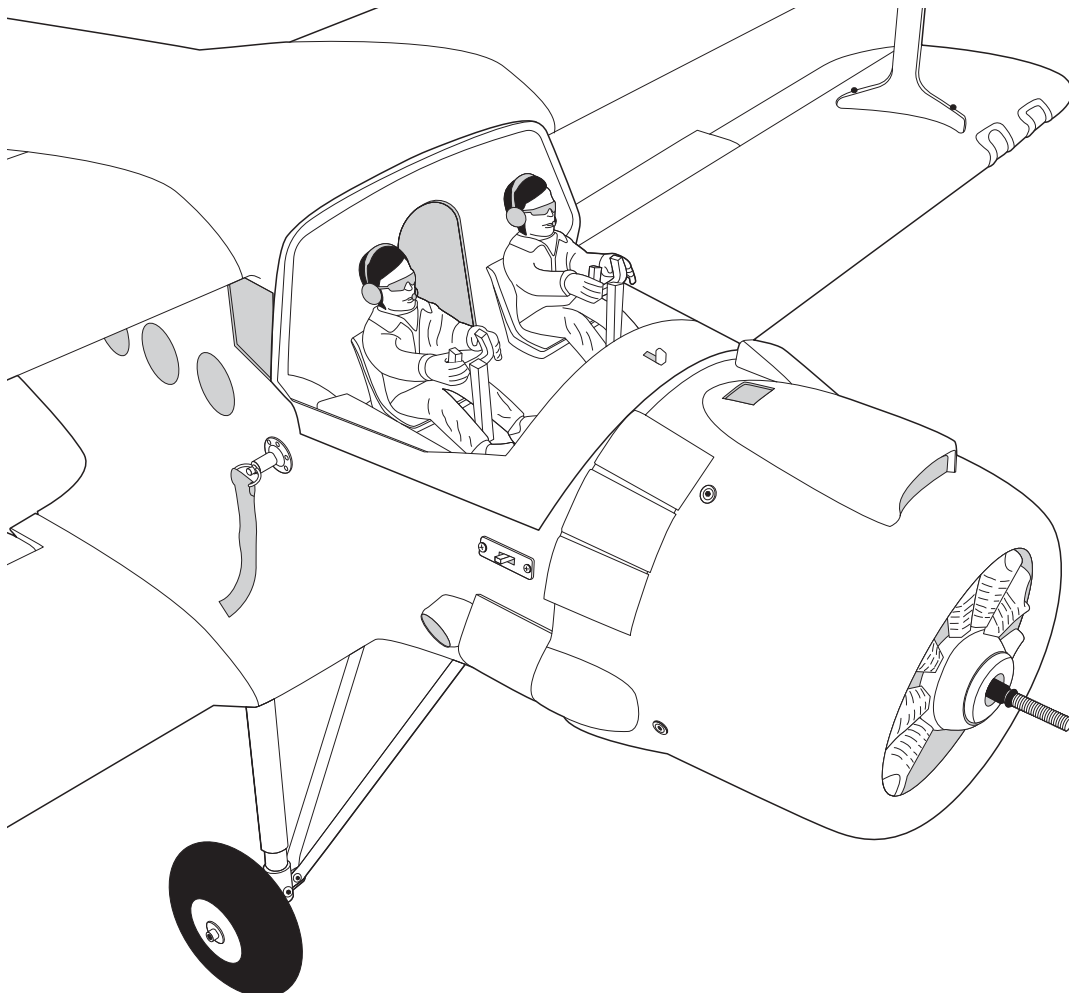


**INSTALLING CANOPY FUSELAGE**

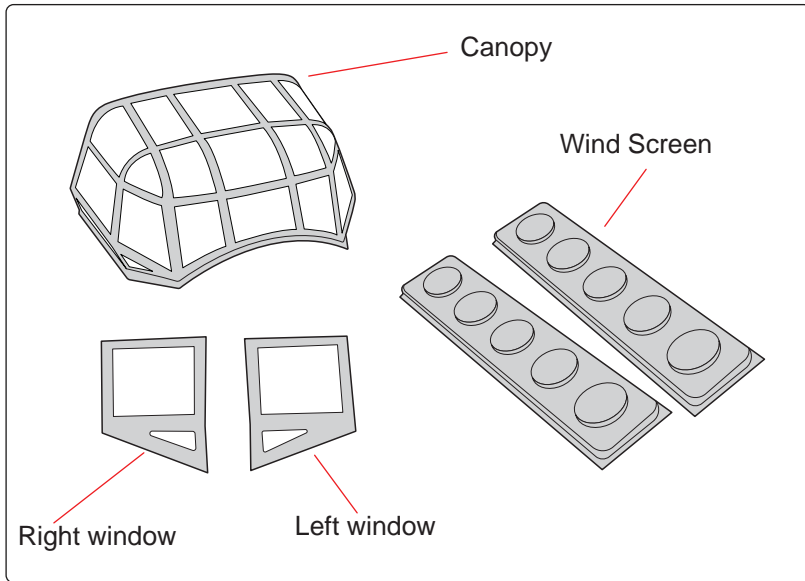

Position the canopy so the rear frame on the canopy is aligned with the rear edge of the cockpit opening. Use canopy glue to secure the canopy to the canopy hatch. Use low-tack tape to hold the canopy in position until the glue fully cures. Wrap the tape completely around the canopy hatch.

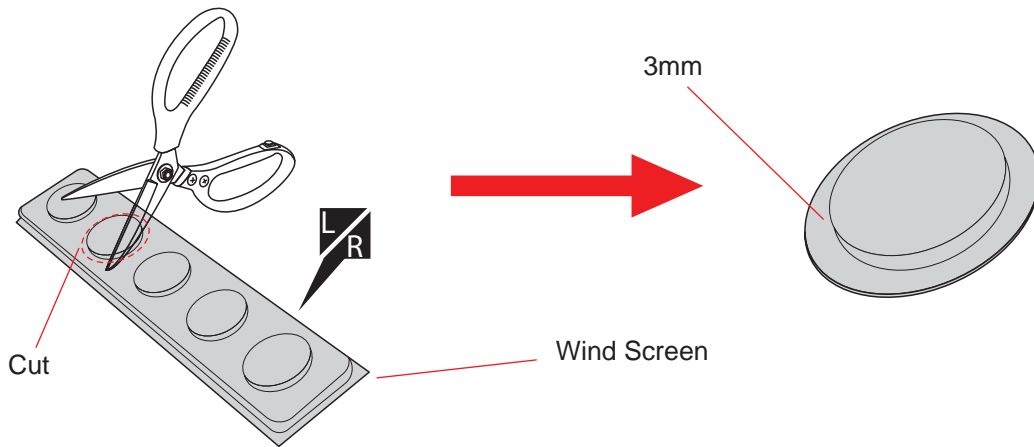

TOP VIEW

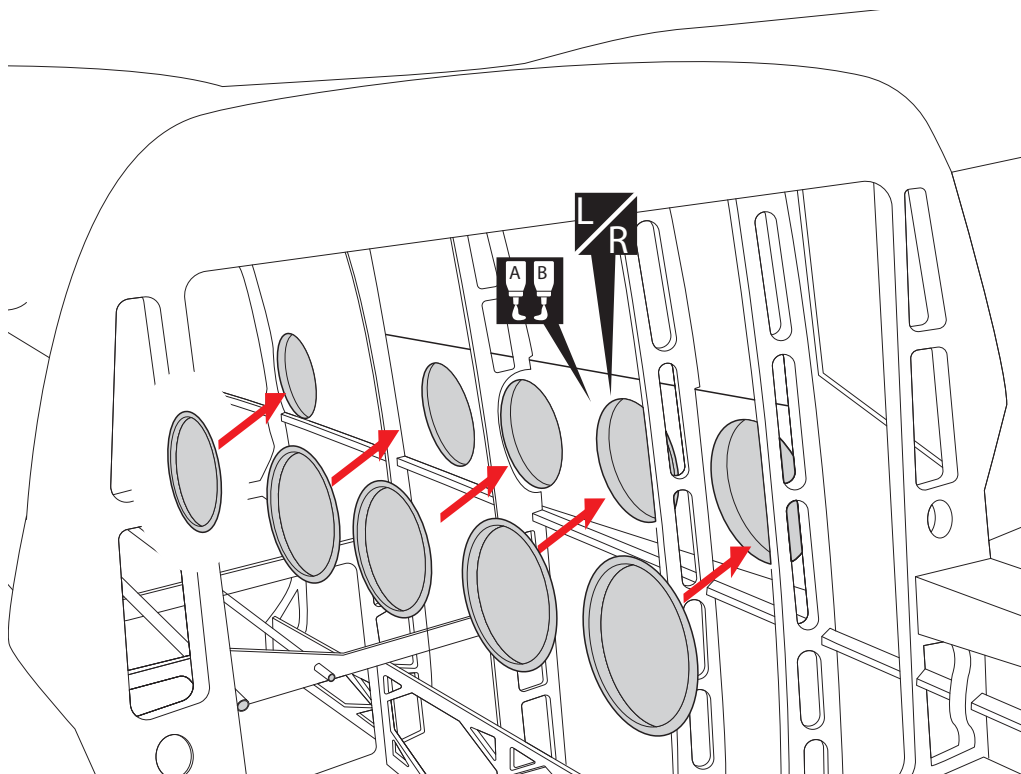


Apply epoxy glue.




Assemble left and right sides the same way.

TOP VIEW

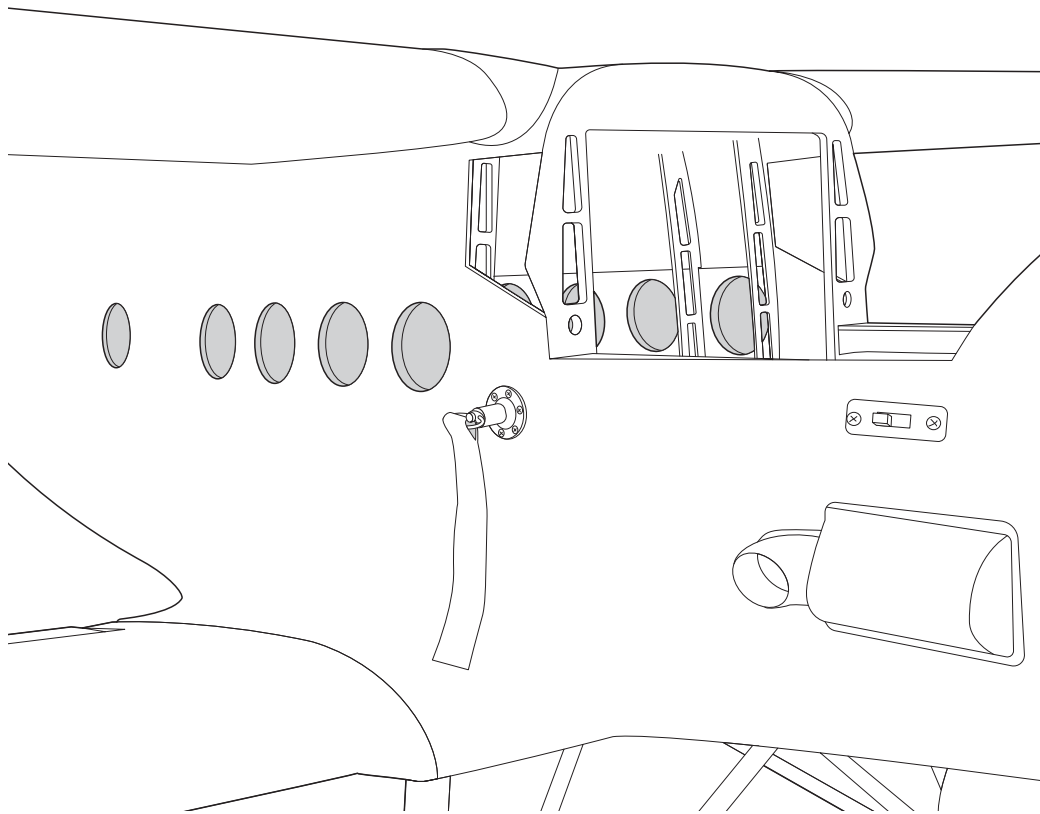

TOP VIEW


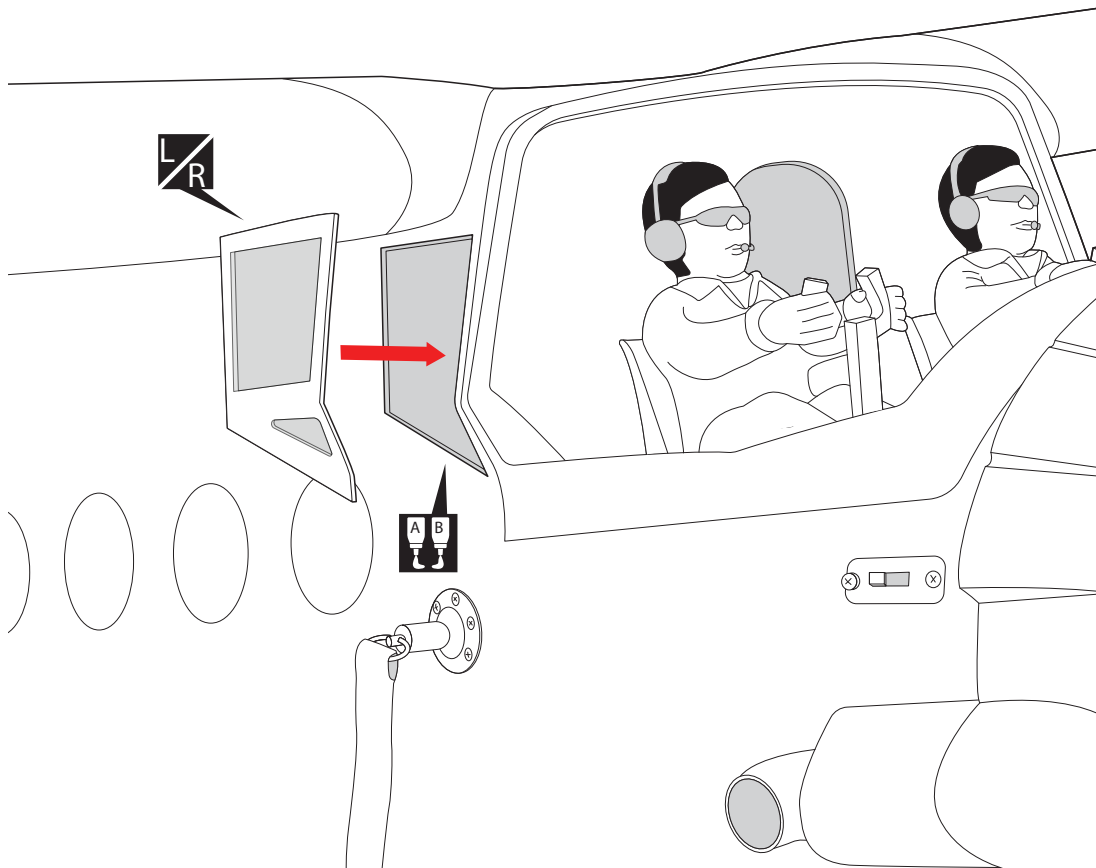


Apply epoxy glue.




Assemble left and right sides the same way.



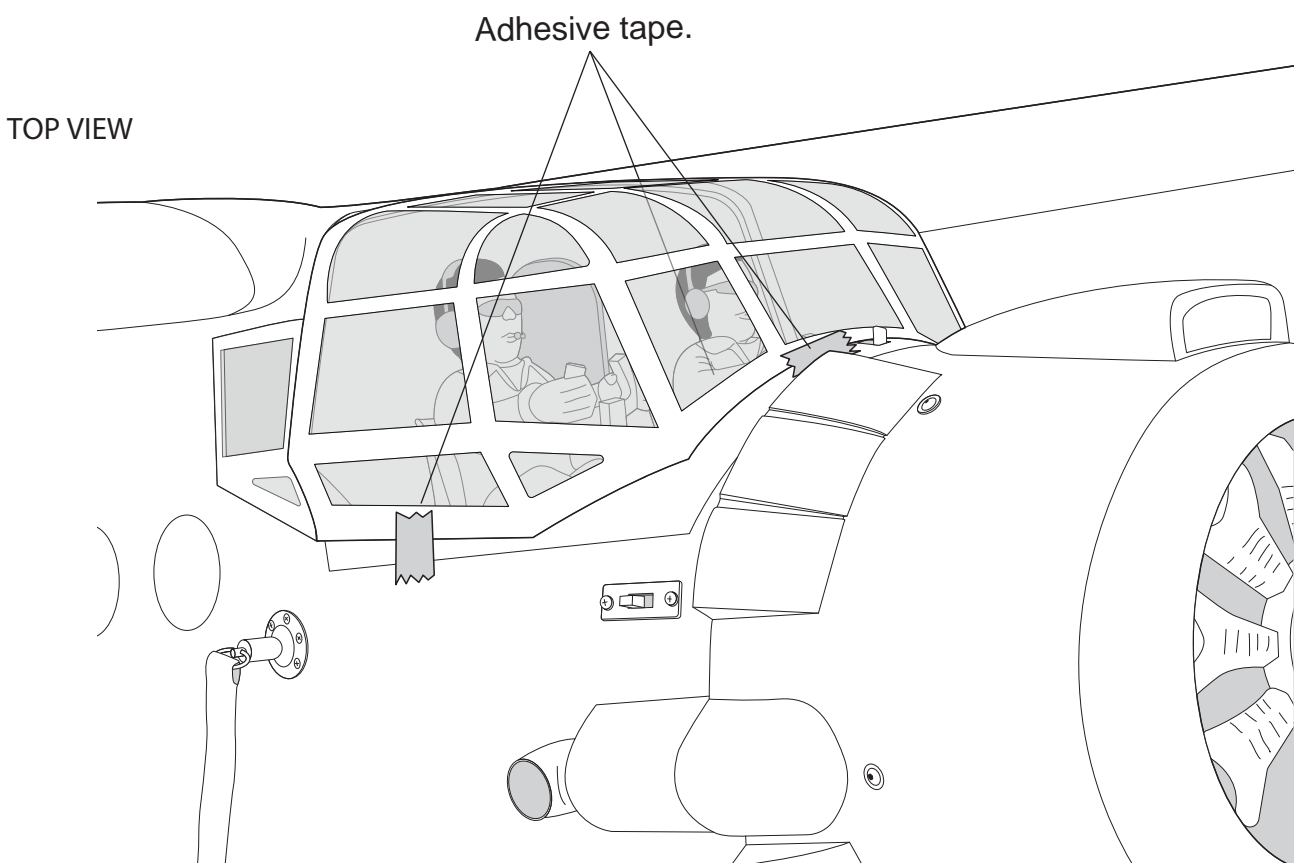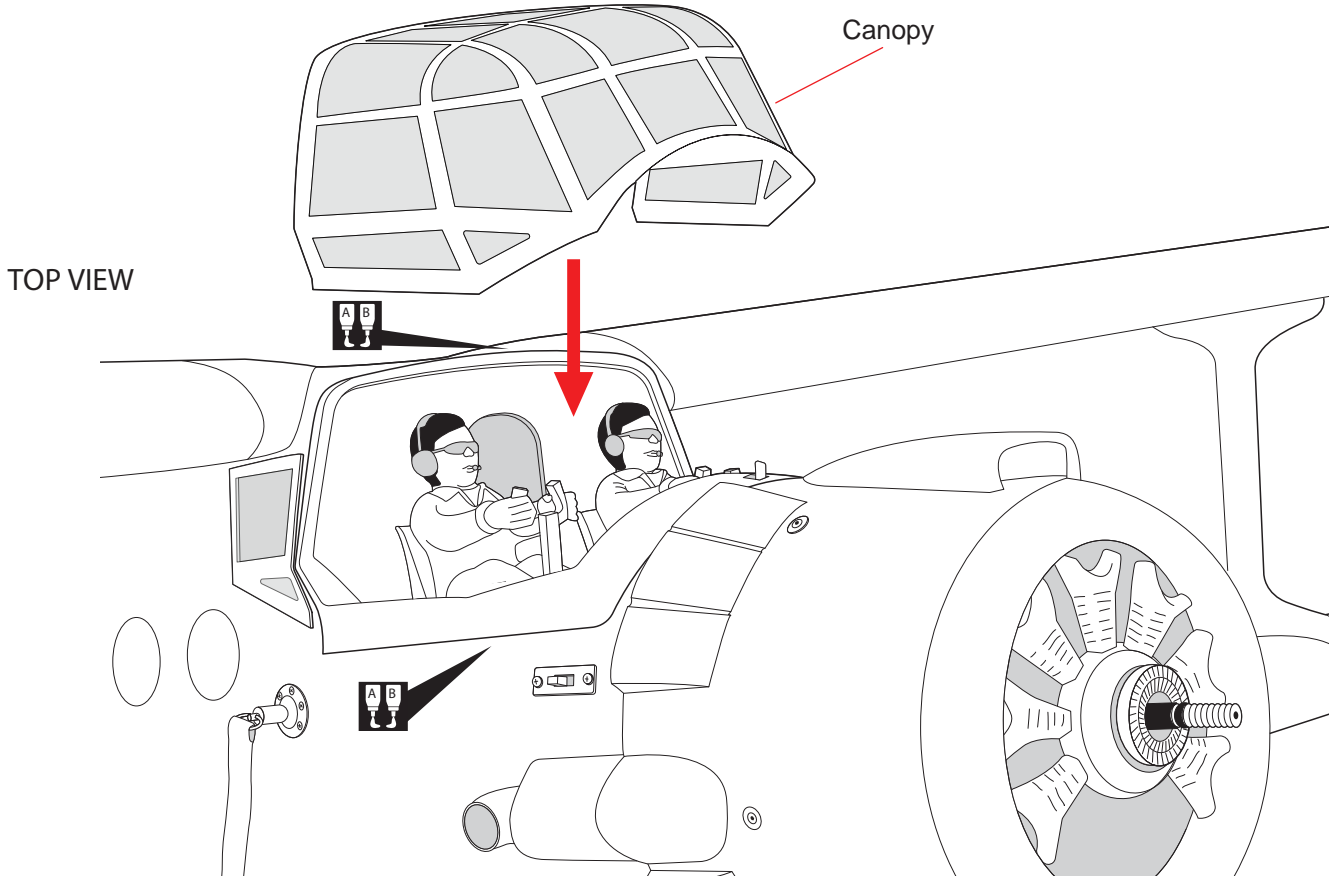





**INSTALLING THE PROPELLER AND SPINNER**

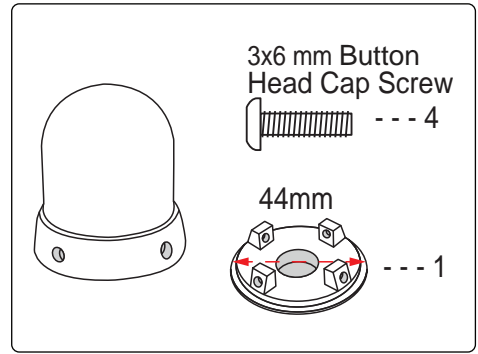


TOP VIEW

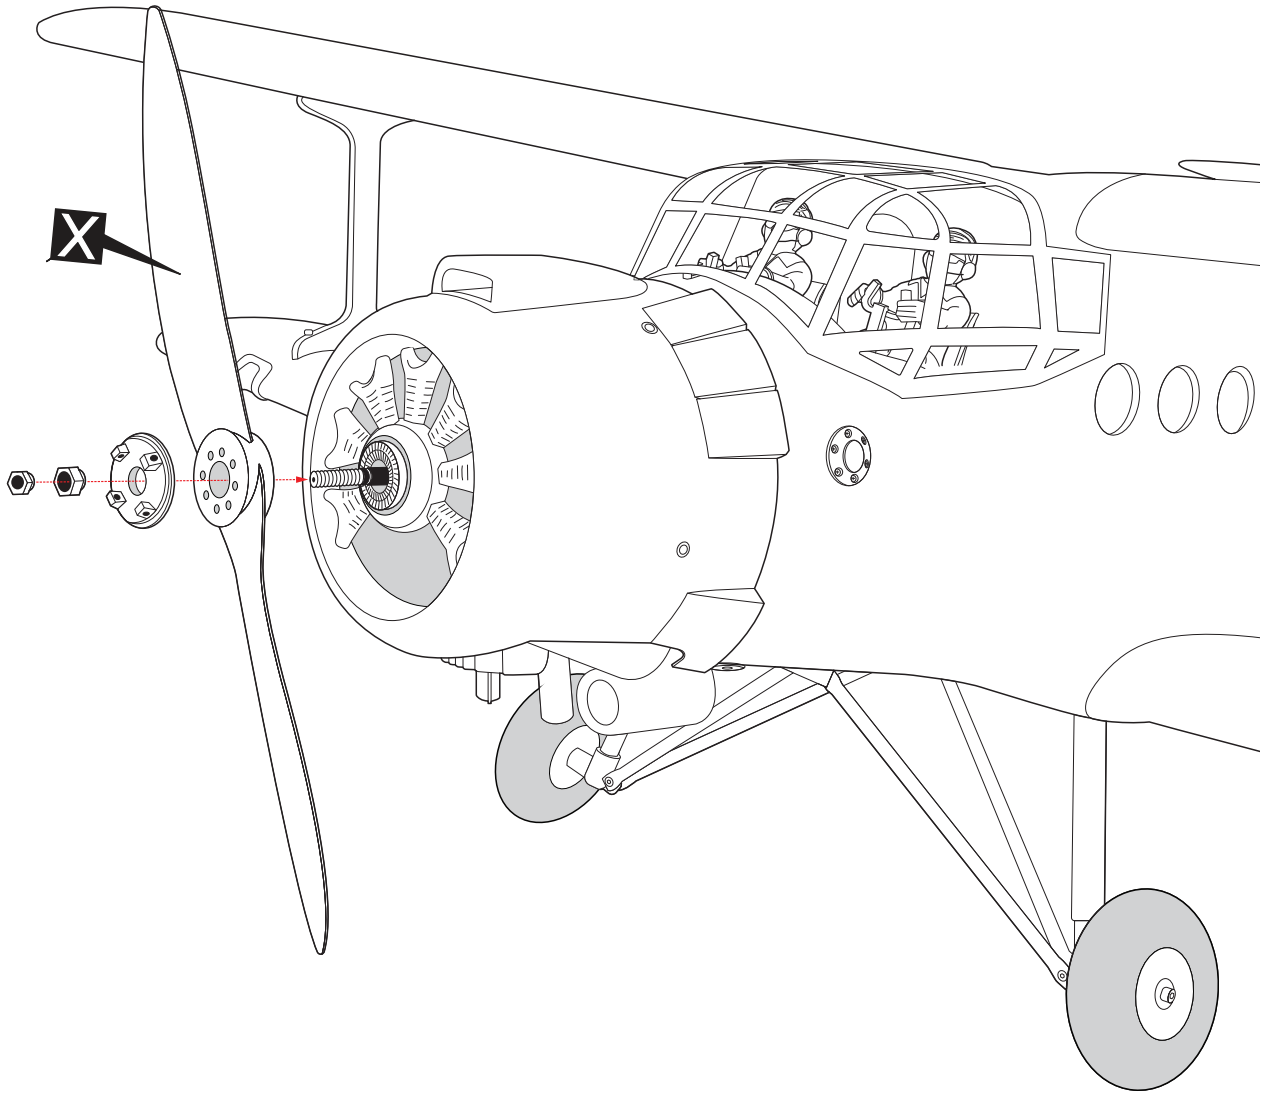

TOP VIEW

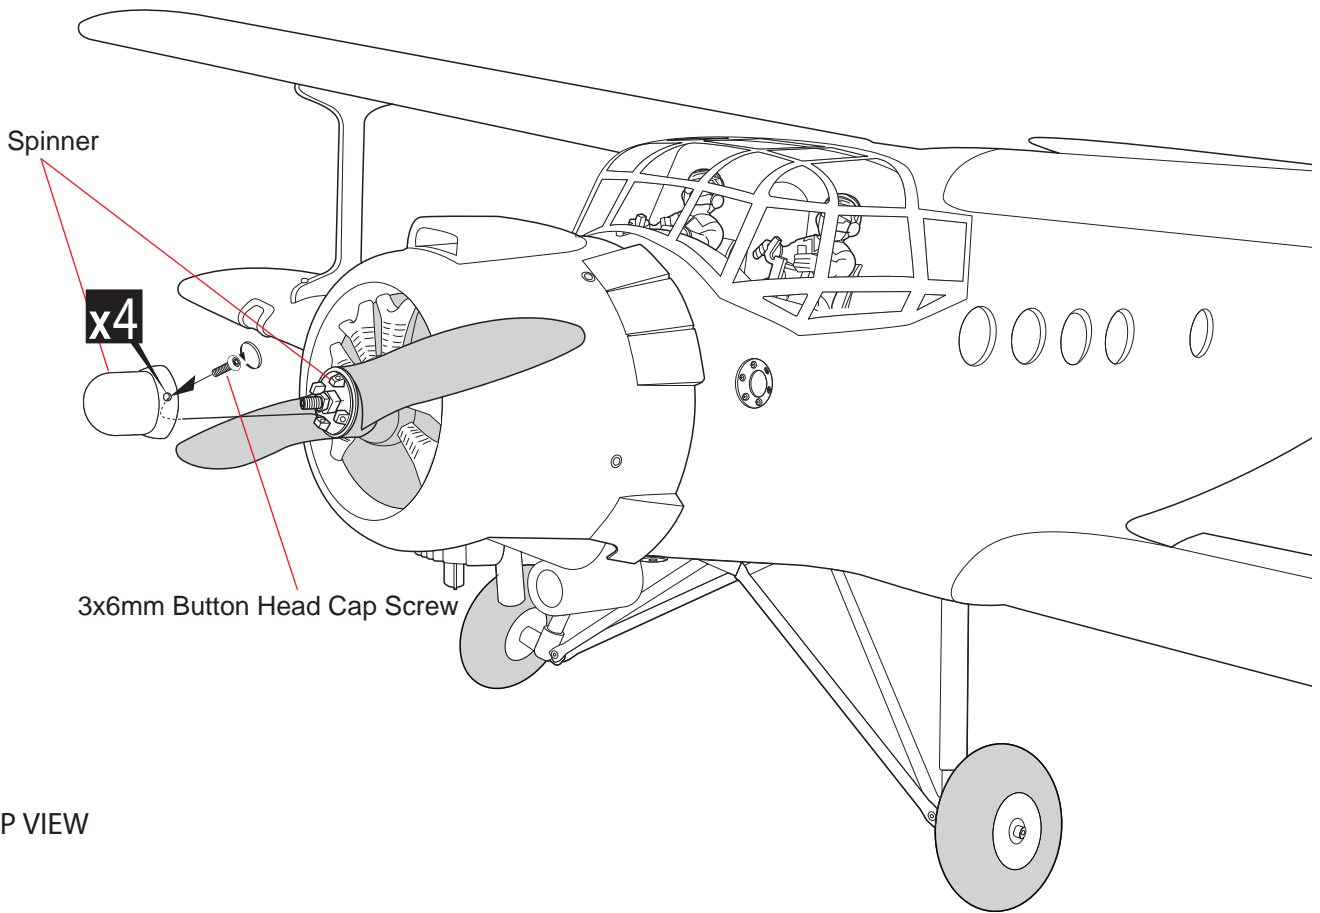

TOP VIEW

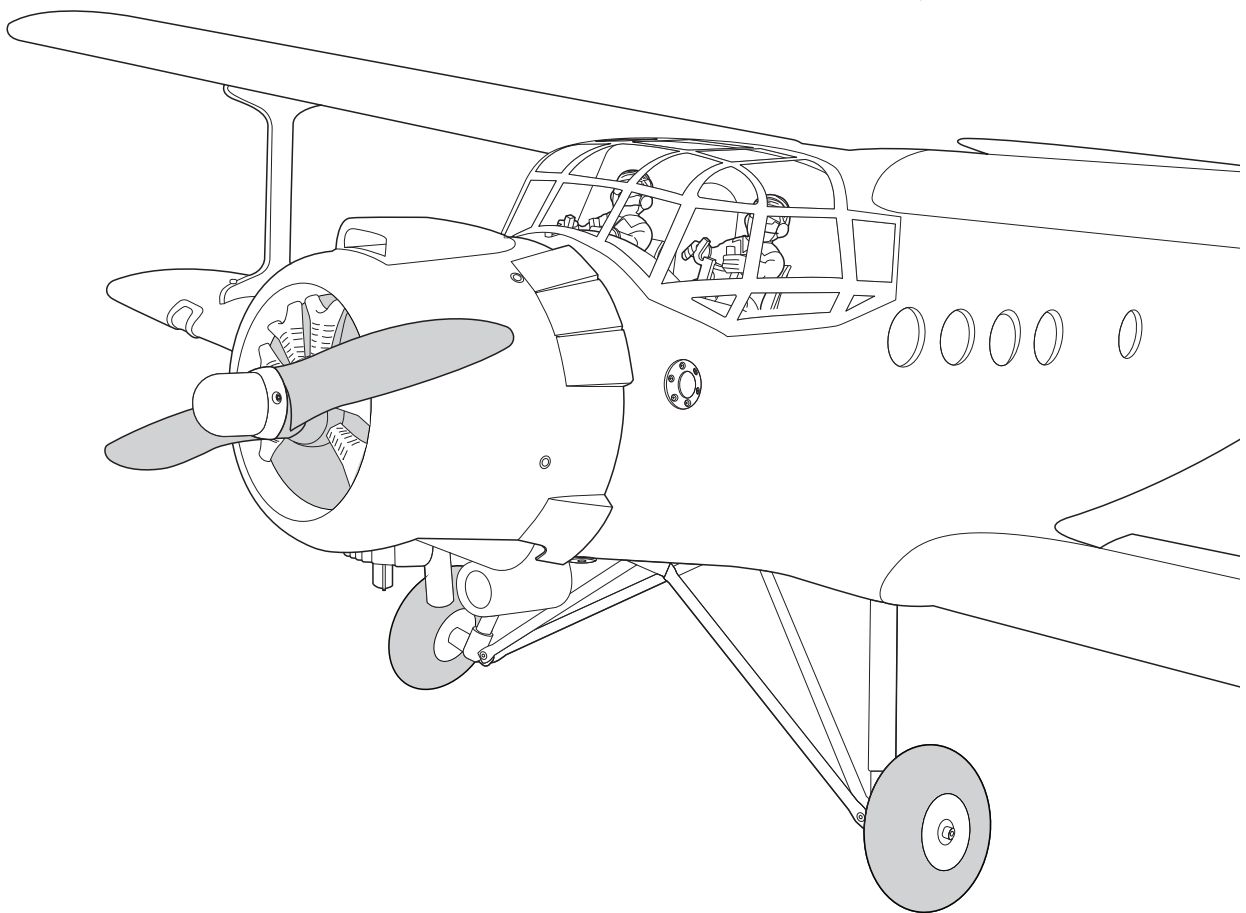

**x4** The number of times the same way Assembly (in this case four times).

## BALANCING


- ❑ 1) It is critical that your airplane be balanced correctly. Improper balance will cause your plane to lose control and crash.

THE CENTER OF GRAVITY IS LOCATED 97MM BACK FROM THE LEADING EDGE OF THE WING

- ❑ 2) Mount the wing to the fuselage. Using a couple of pieces of masking tape, place them on the top side of the wing 97mm back from the leading edge, at the fuselage sides.

- ❑ 3. Turn the airplane upside down. Place your fingers on the masking tape and carefully lift the plane.

Accurately mark the balance point on the top of the wing on both sides of the fuselage. The balance point is located 69mm back from the leading edge. This is the balance point at which your model should balance for your first flights. Later, you may wish to experiment by shifting the balance up to 10mm forward or back to change the flying characteristics. Moving the balance forward may improve the smoothness and arrow-like tracking, but it may then require more speed for take off and make it more difficult to slow down for landing. Moving the balance aft makes the model more agile with a lighter and snappier "feel". In any case, please start at the location we recommend.

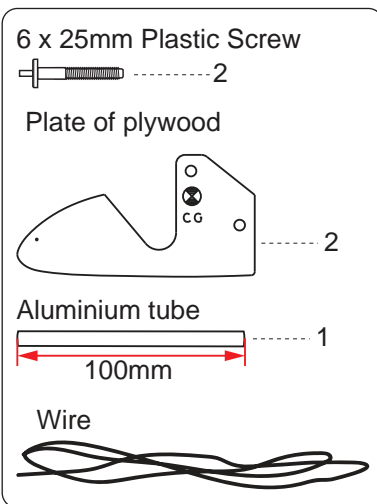

- ▶ In order to obtain the CG specified, reposition the receiver and other equipment.
- ▶ If not obtain the CG specified, add a weight and adjust.






- ▶ Do not fly before confirming the correct location of the CG. If the CG is incorrect, you lose control of your airplane which leads to accidents.

Lift the model. If the tail drops when you lift, the model is "tail heavy" and you must add weight\* to the nose. If the nose drops, it is "nose heavy" and you must add weight\* to the tail to balance.

With the wing attached to the fuselage, all parts of the model installed (ready to fly), and empty fuel tanks, hold the model at the marked balance point with the stabilizer level.

\*If possible, first attempt to balance the model by changing the position of the receiver battery and receiver. If you are unable to obtain good balance by doing so, then it will be necessary to add weight to the nose or tail to achieve the proper balance point.

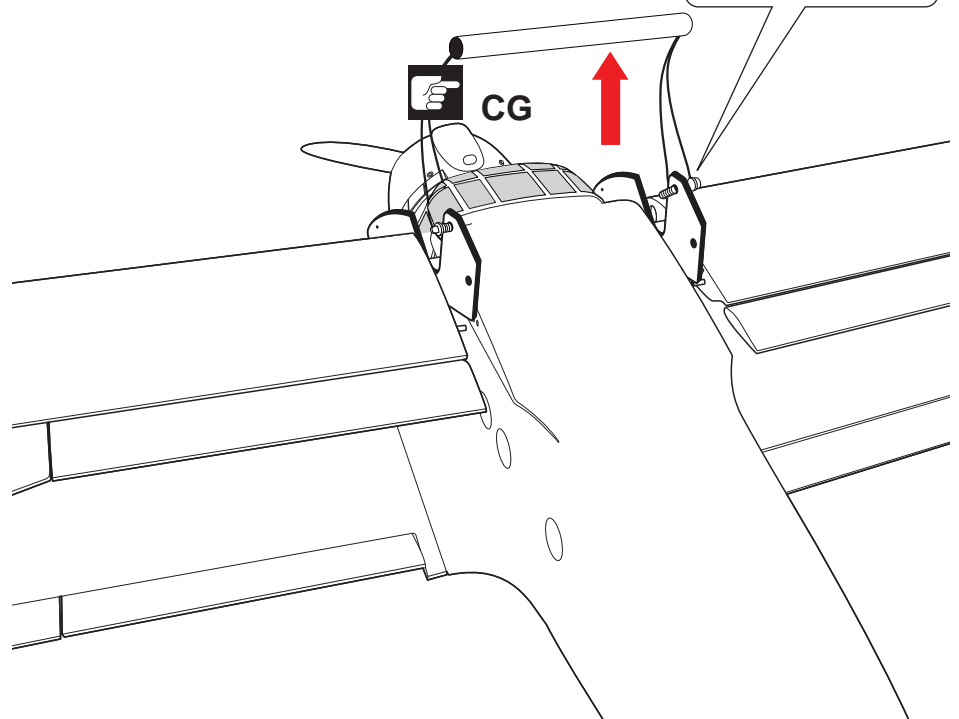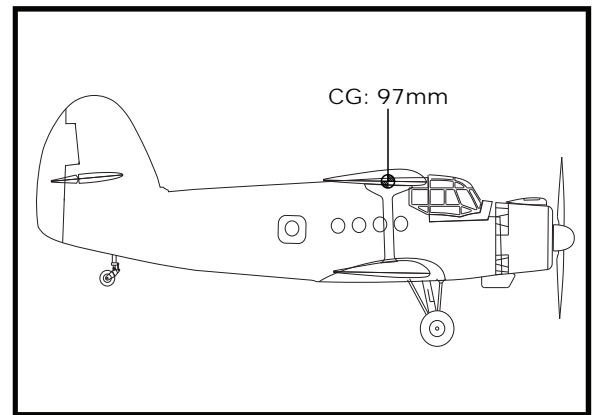

**CONTROL THROWS.**

- ▶ 1) We highly recommend setting up a plane using the control throws listed.
- ▶ 2) The control throws should be measured at the widest point of each control surface.
- ▶ 3) Check to be sure the control surfaces move in the correct directions.

## • LOW RATE

Ailerons: 15mm up 15mm down  
 Elevator : 12mm up 12mm down  
 Rudder : 25mm right 25mm left  
 Flap : Mid 25mm down


## • HIGH RATE

Ailerons: 18mm up 18mm down  
 Elevator : 15mm up 15mm down  
 Rudder : 25mm right 25mm left  
 Flap : Landing 30mm down

**PRE-FLIGHT CHECK.**

- ▶ 1) Completely charge your transmitter and receiver batteries before your first day of flying.
- ▶ 2) Check every bolt and every glue joint in your plane to ensure that everything is tight and well bonded.
- ▶ 3) Double check the balance of the airplane.
- ▶ 4) Check the control surface.
- ▶ 5) Check the receiver antenna . It should be fully extended and not coiled up inside the fuselage.
- ▶ 6) Properly balance the propeller.



We wish you many safe and enjoyable flights with your **ANTONOV AN - 2**

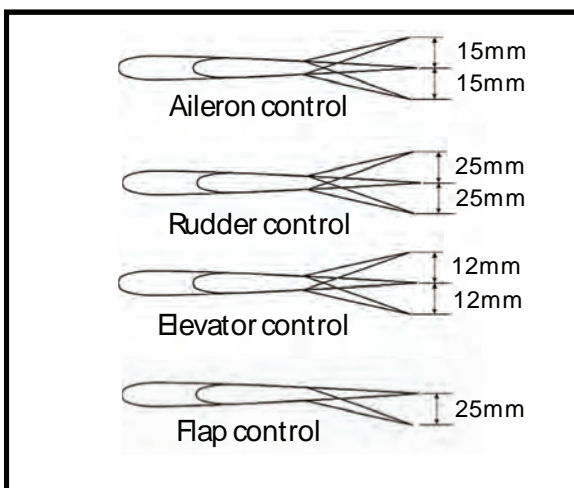


**FOR YOUR RADIO INSTALLATION  
BASIC CONNECTION FOR AIRPLANE AND ADJUSTMENT OF SERVOS**

**Example of connection**


- For more information, refer to radio system instruction manual.
- Follow instruction manual of Engine and Battery.

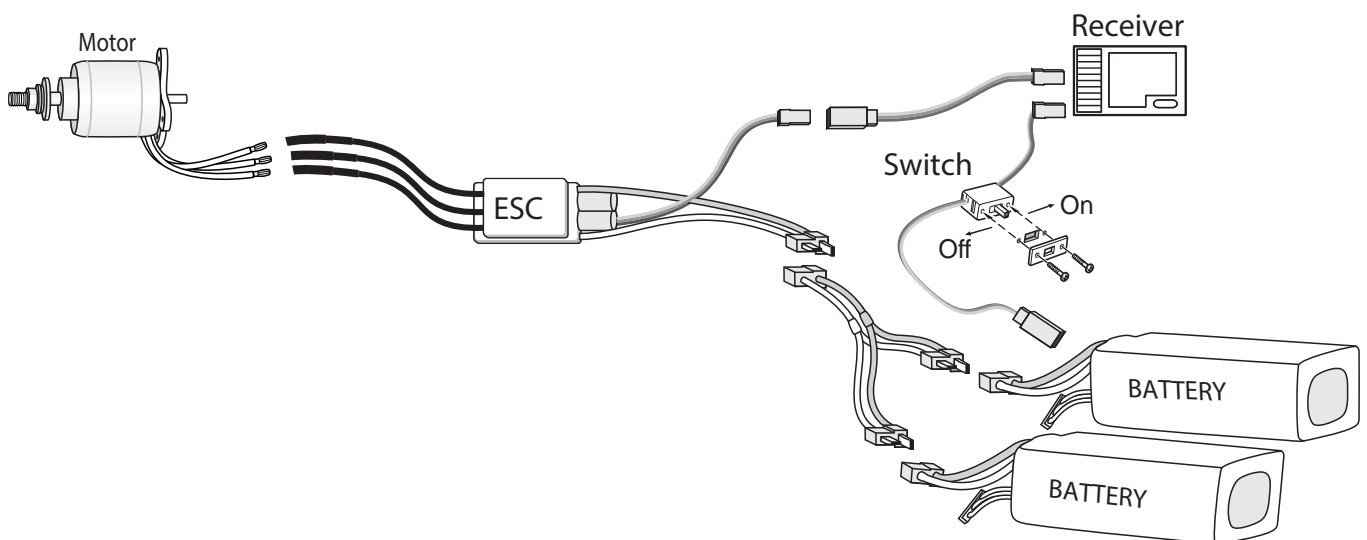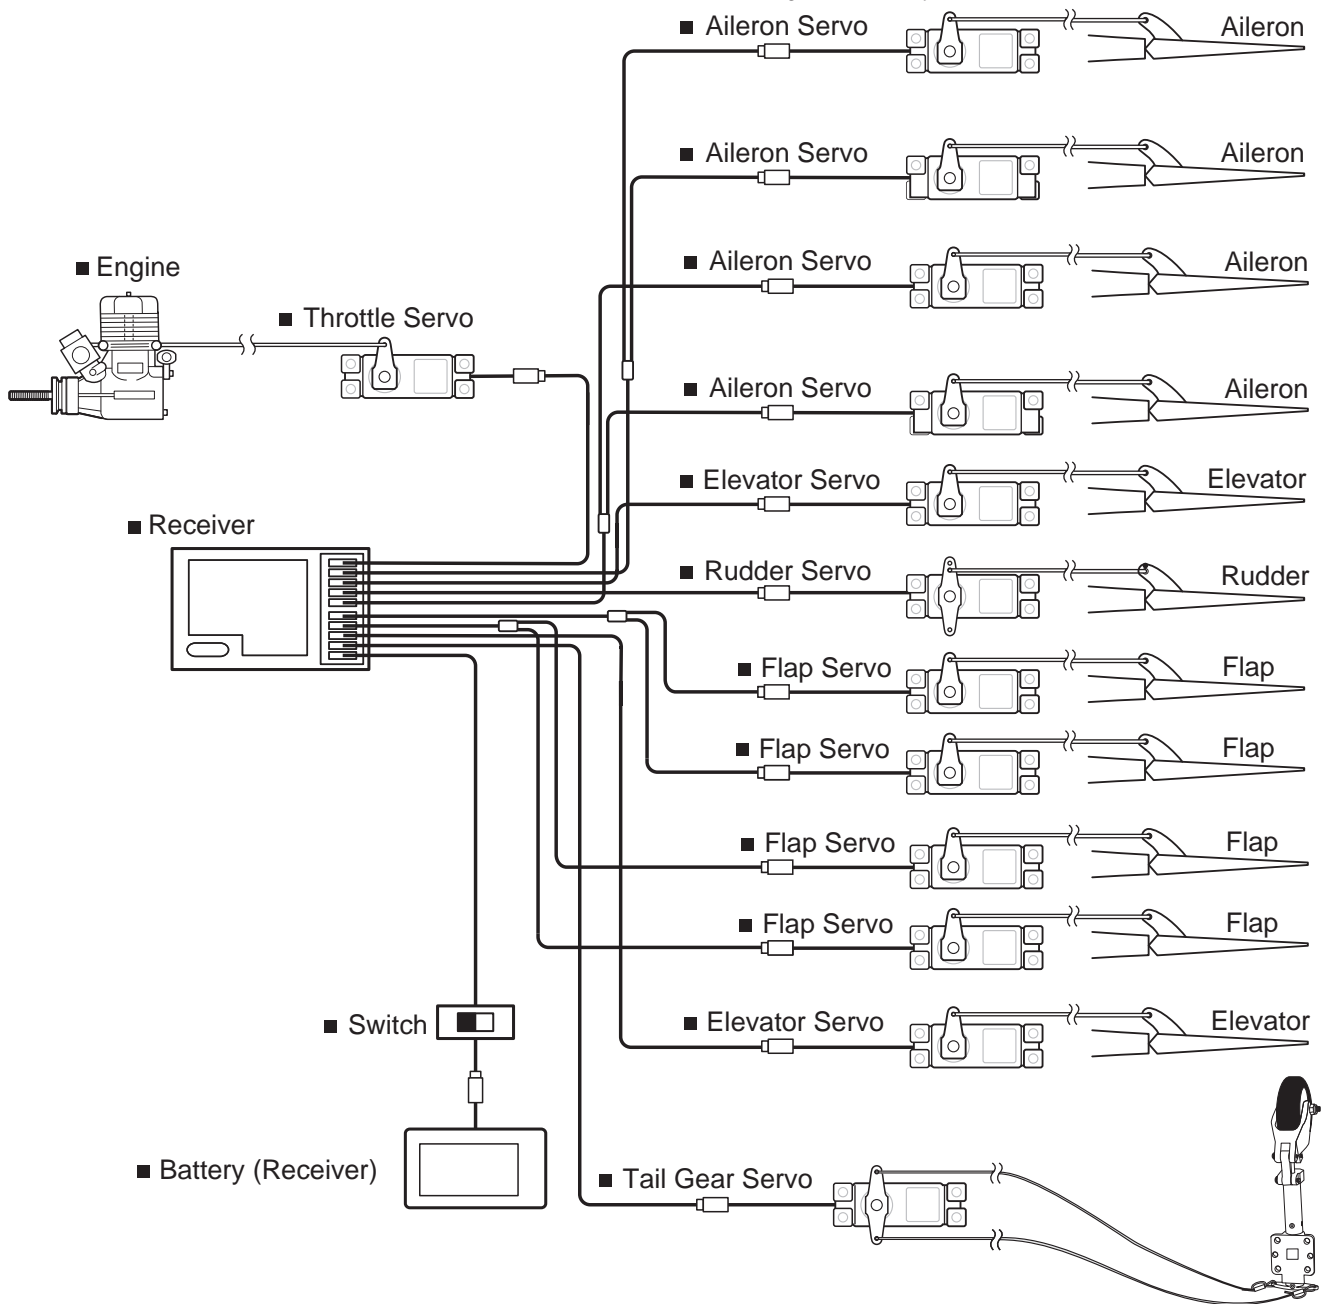


**MAIN GEAR DIMENSIONAL DETAIL**

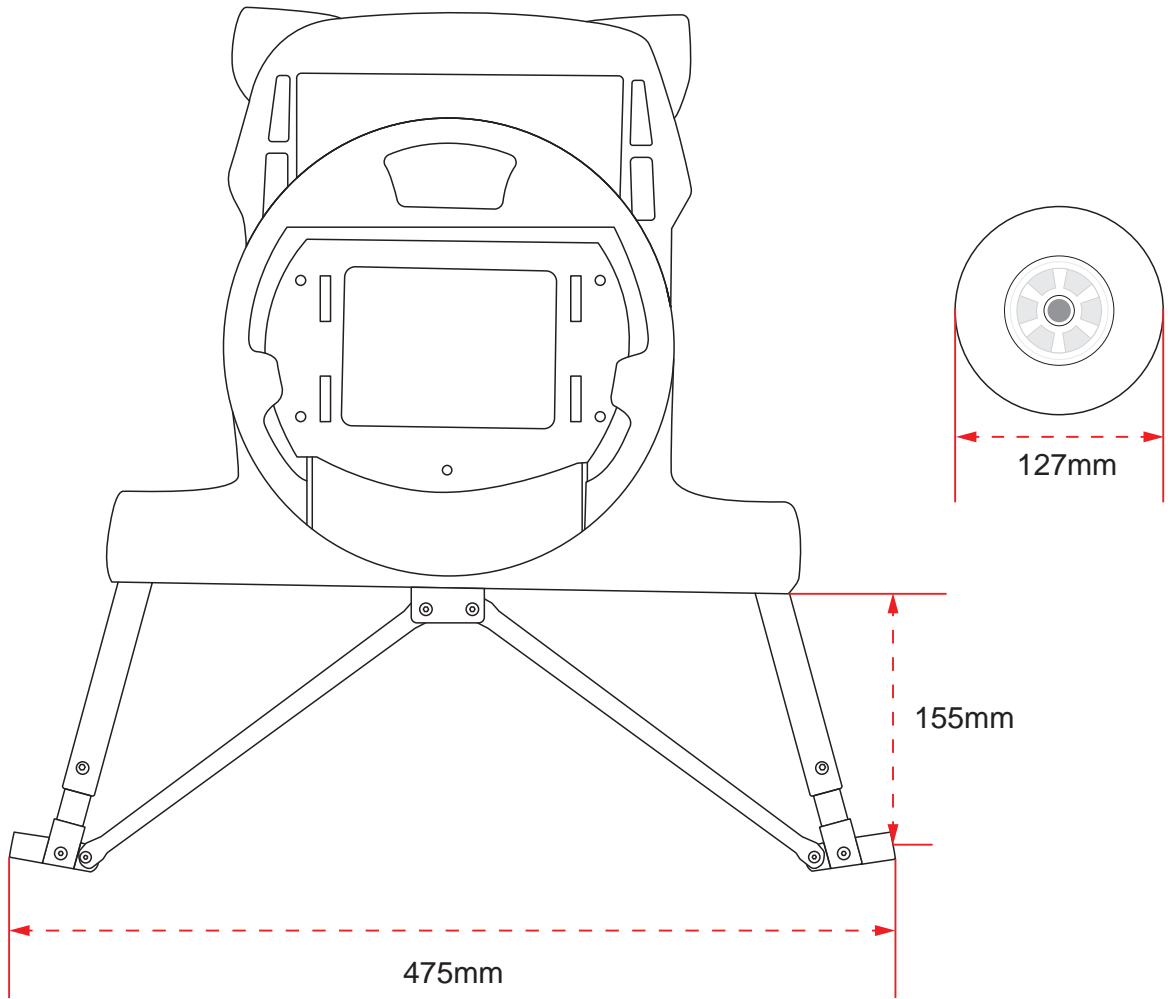


**TAIL GEAR DIMENSIONAL DETAIL**

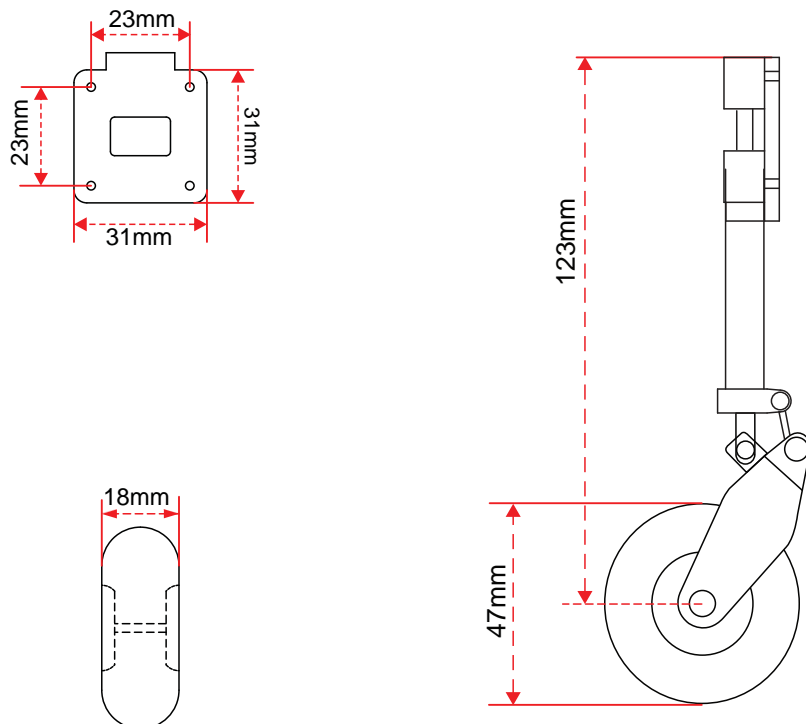

DECORATION

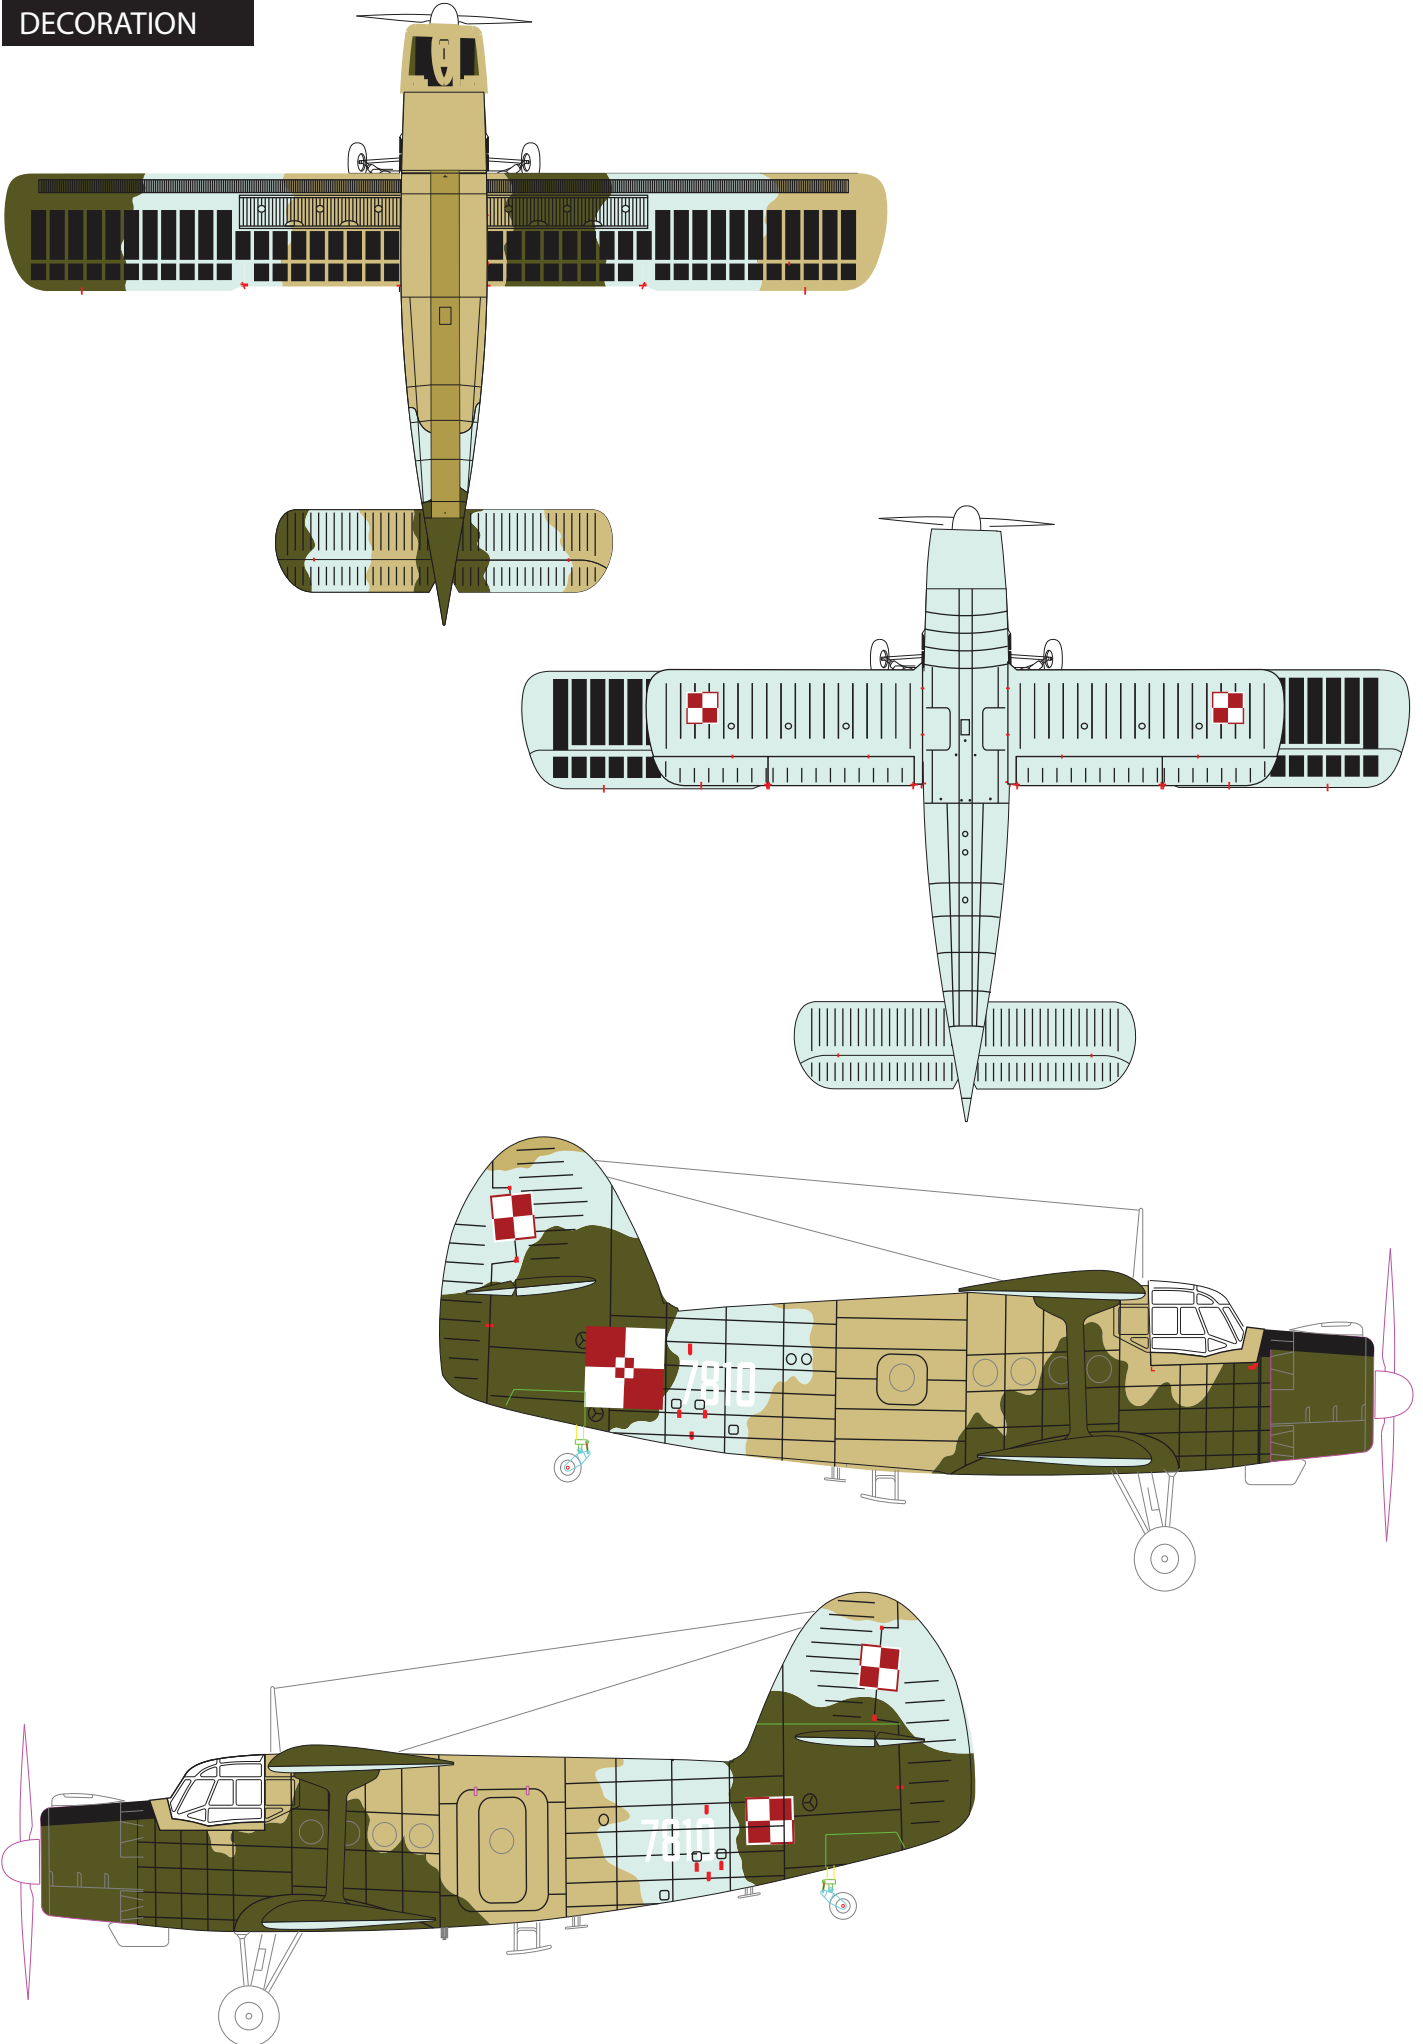


EXPLODED VIEW

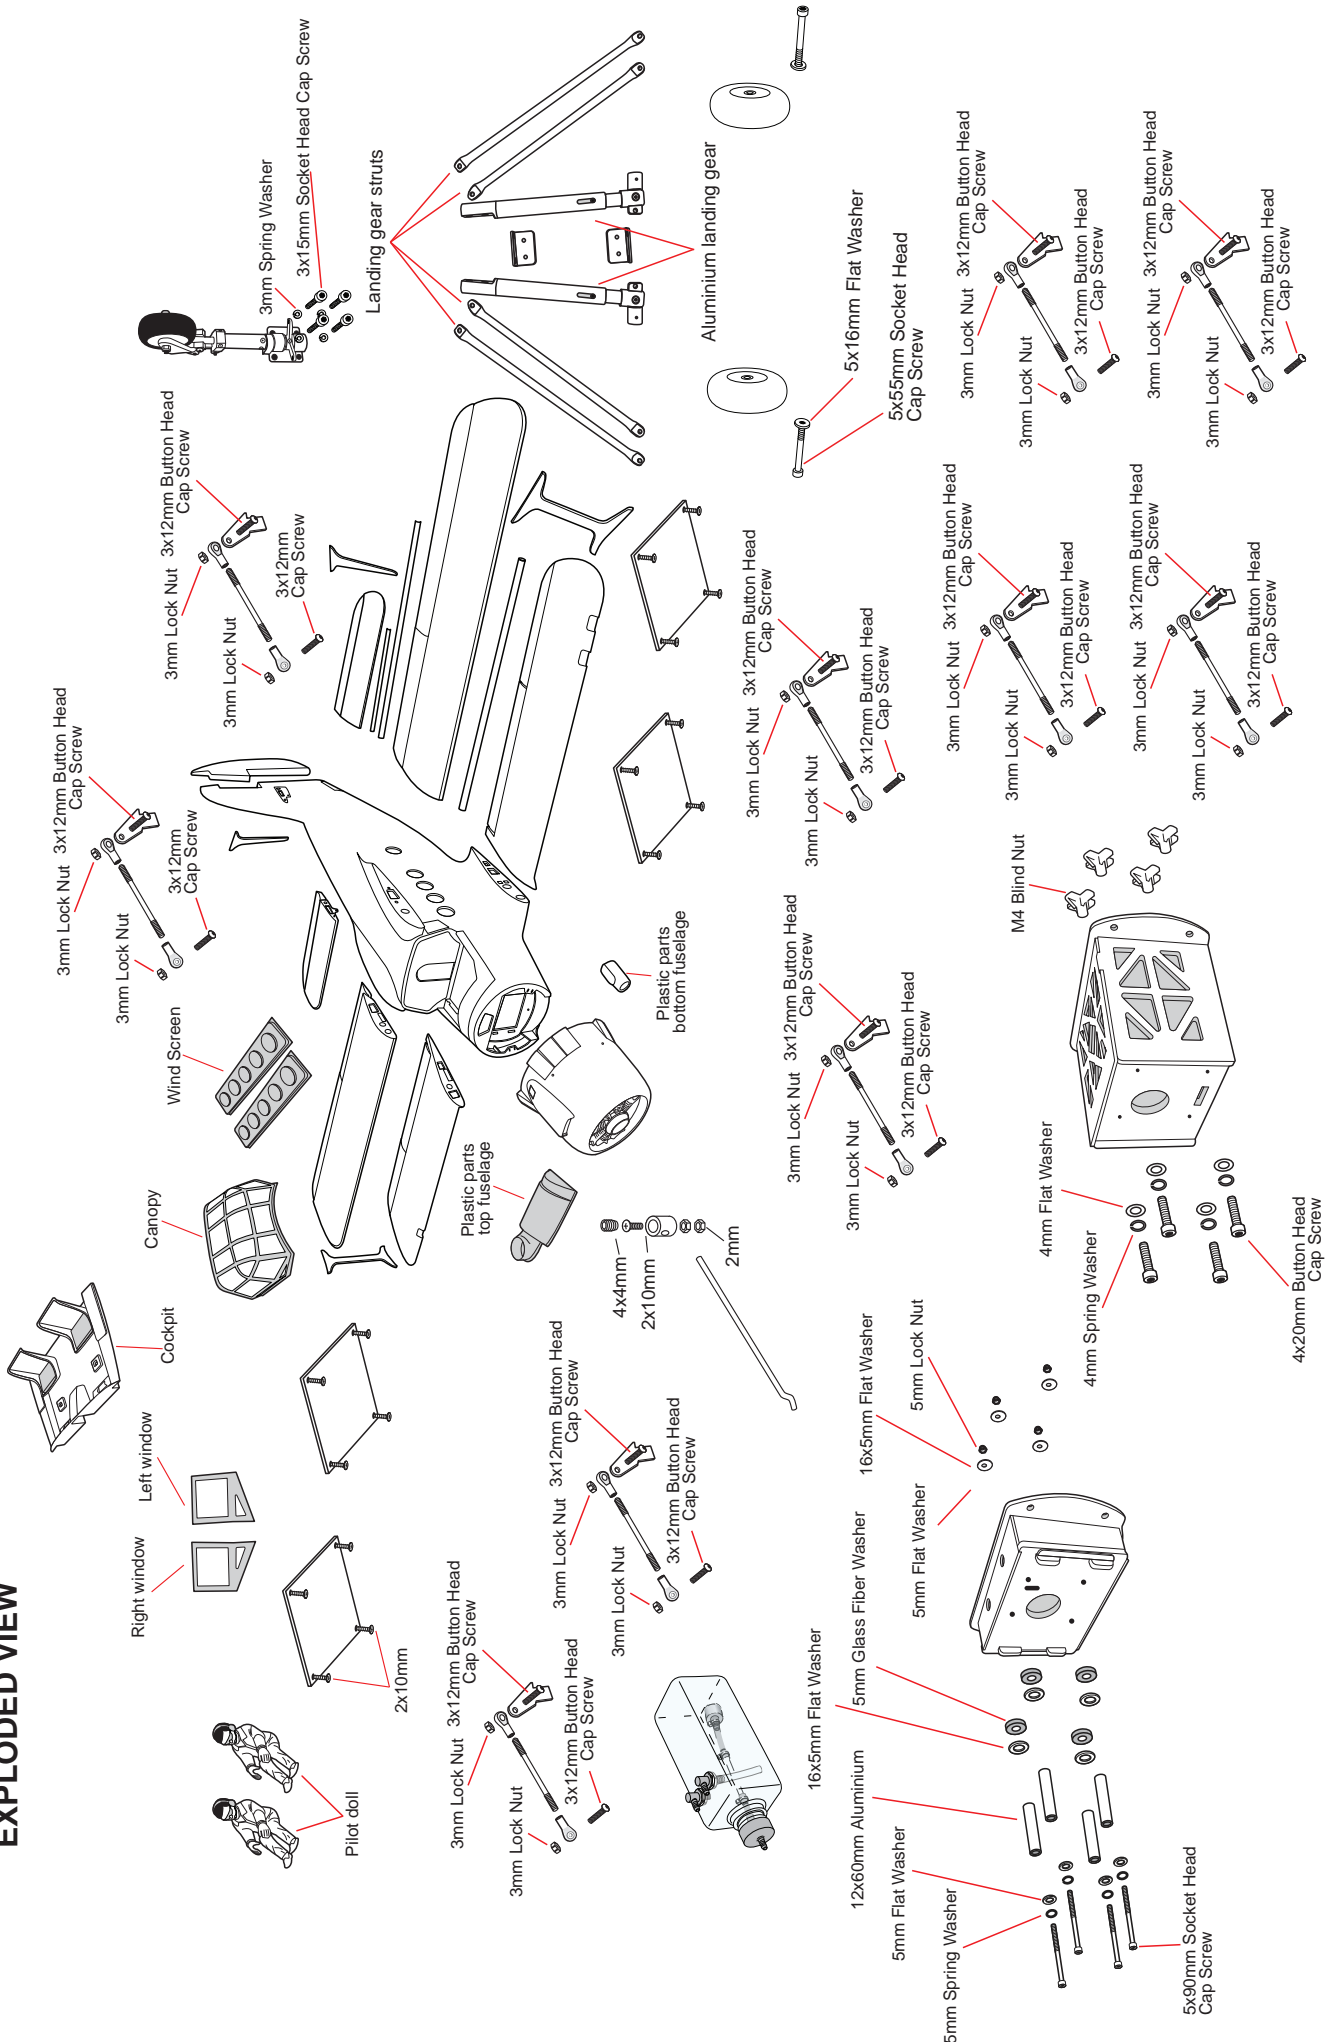





# I/C FLYING WARNINGS

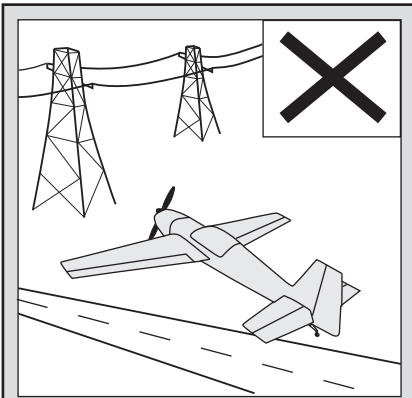


NEVER fly near power lines, aerials or other dangerous areas including airports, motorways etc.

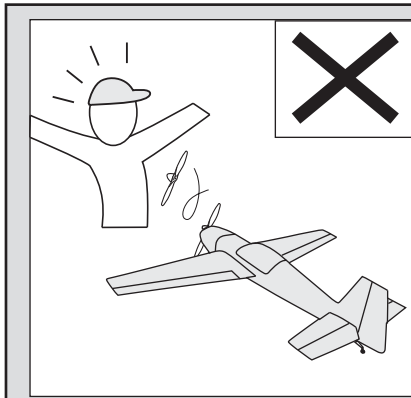


ALWAYS adjust the engine from behind the propeller, and do not allow any part of your body to be in line with the propeller.

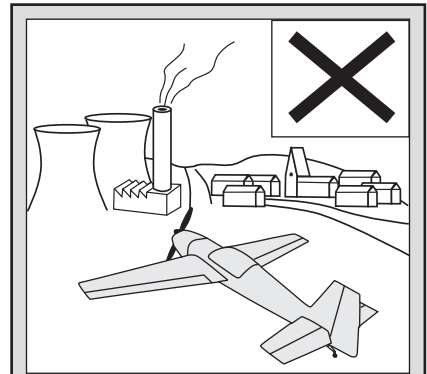


Always operate in open areas, away from factories, hospitals, schools, buildings and houses etc. NEVER fly your aircraft close to people or built up areas.

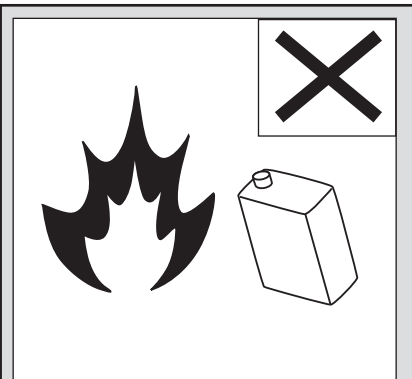


DO NOT dispose of empty fuel containers on a fire, this can lead to an explosion.

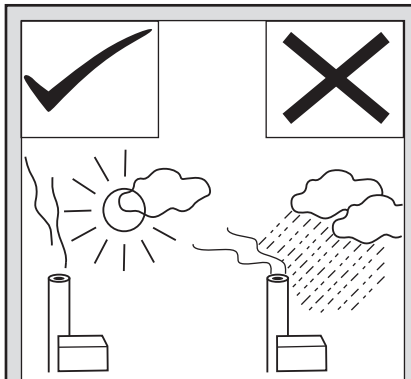


NEVER fly in wet conditions or on windy or stormy days.

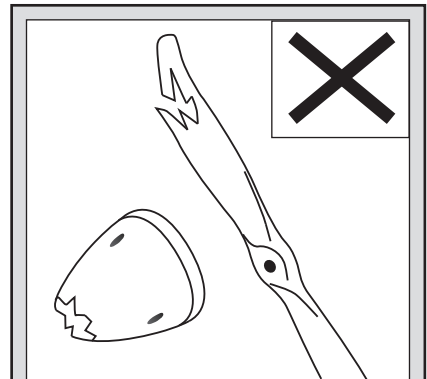

NEVER use damaged or deformed propellers or spinners.

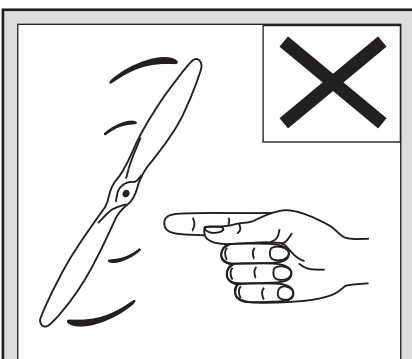


THE PROPELLER IS DANGEROUS. Keep fingers, clothing (ties, shirt sleeves, scarves) or any other loose objects that could be caught or drawn in, away from the propeller. Take care at ALL times.

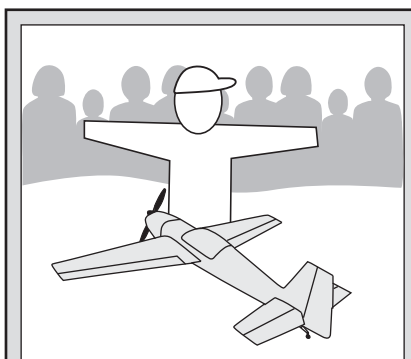


Keep all onlookers (especially small children and animals) well back from the area of operation. This is a flying aircraft, which will cause serious injury in case of impact with a person or animal.


# I/C FLYING GUIDELINES

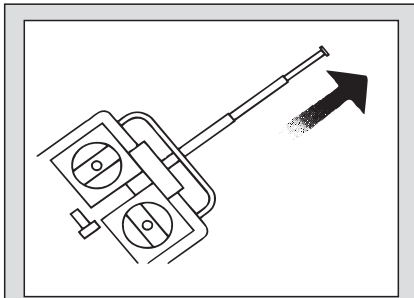


When ready to fly, first extend the transmitter aerial.

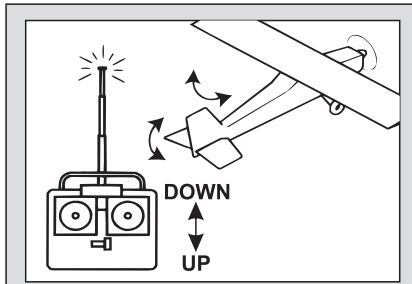


Operate the control sticks on the transmitter and check that the control surfaces move freely and in the CORRECT directions.

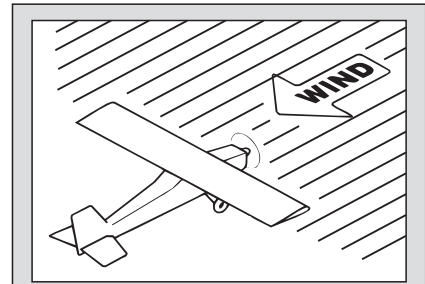


ALWAYS land the model INTO the wind, this ensures that the model lands at the slowest possible speed.

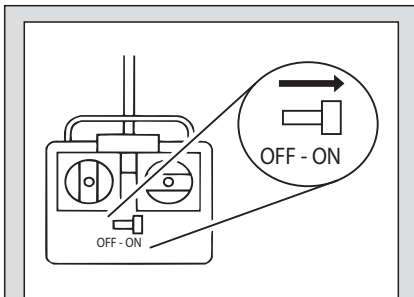


Switch on the transmitter.

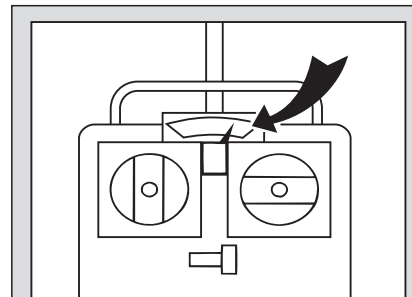


Check that the transmitter batteries have adequate power.

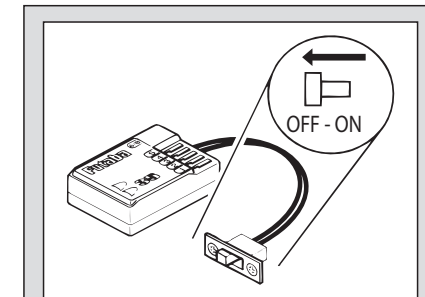


Switch off the receiver.

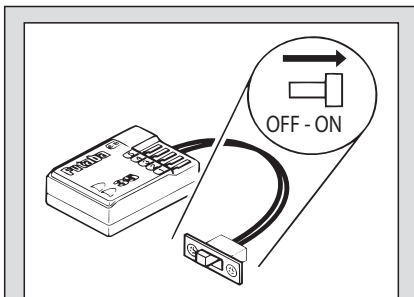


Switch on the receiver.

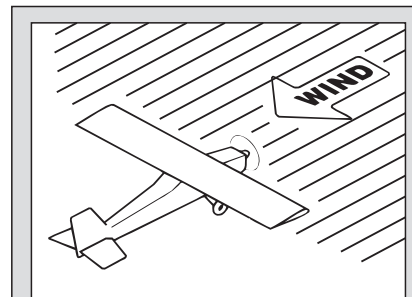


ALWAYS take off into the wind.

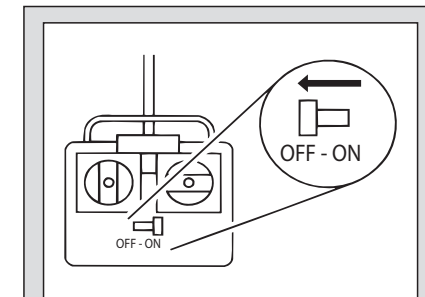


Switch off the transmitter.

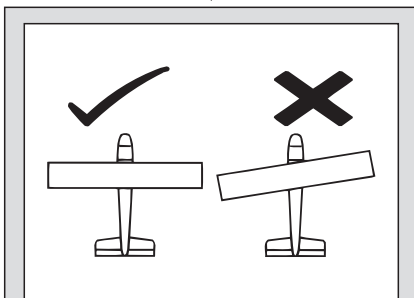

Check that the wings are correctly fitted to the fuselage.

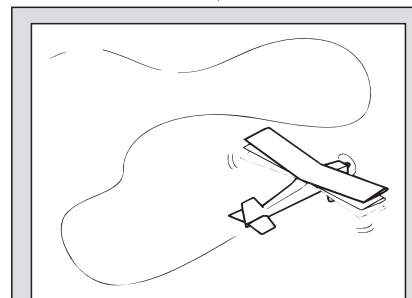

If the model does not respond correctly to the controls, land it as soon as possible and correct the fault.

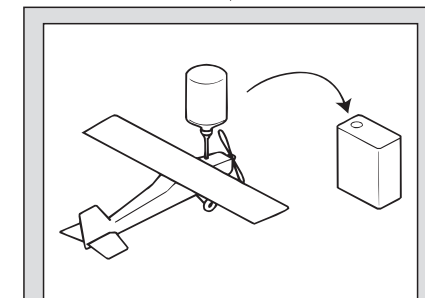

Empty the fuel tank after flying, fuel left in the tank can cause corrosion and lead to engine problems.