Step 1

Remove the speaker cover, this can be done by carefully prying up on it with a plastic pry tool, there are 4 clips, one in each corner, these are what you are releasing.

FACTORY CLIP LOCATION
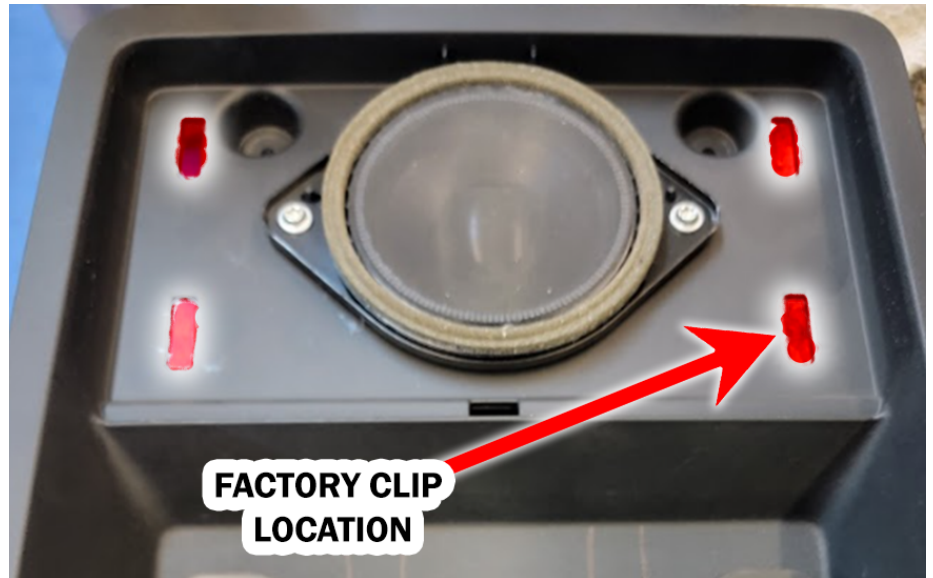
Step 2

Remove the two screws that are under the speaker cover on either side of the speaker

REMOVE

Step 3

Remove the dash piece. There are three clips along the front edge that will need to be released, this is done by gently prying up on the front edge with a plastic pry tool.
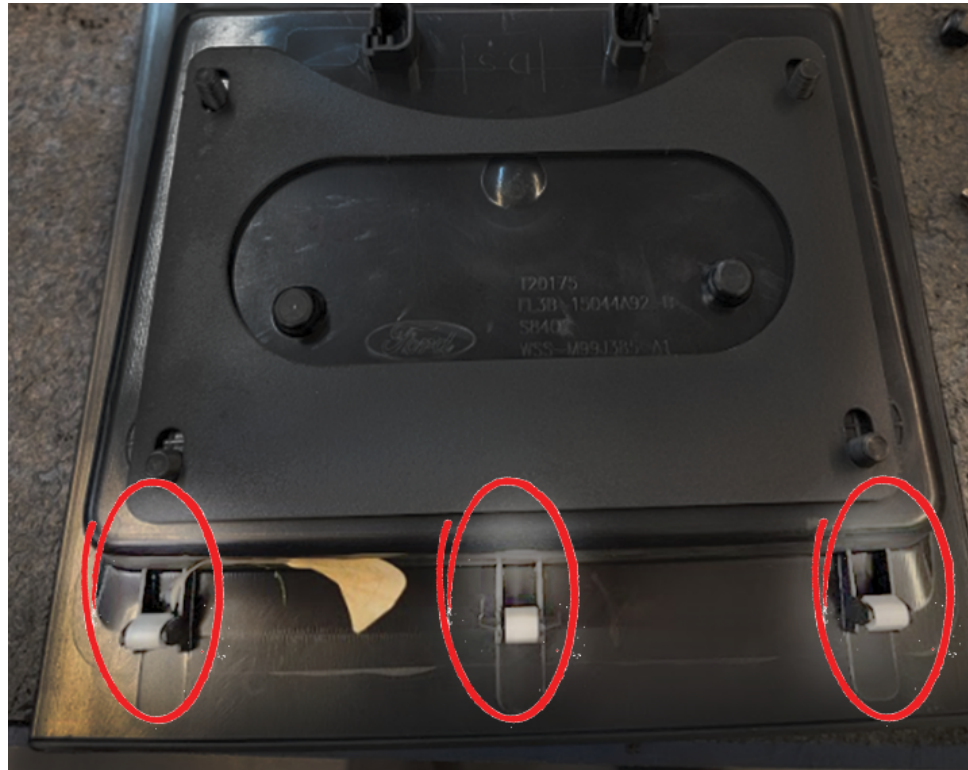
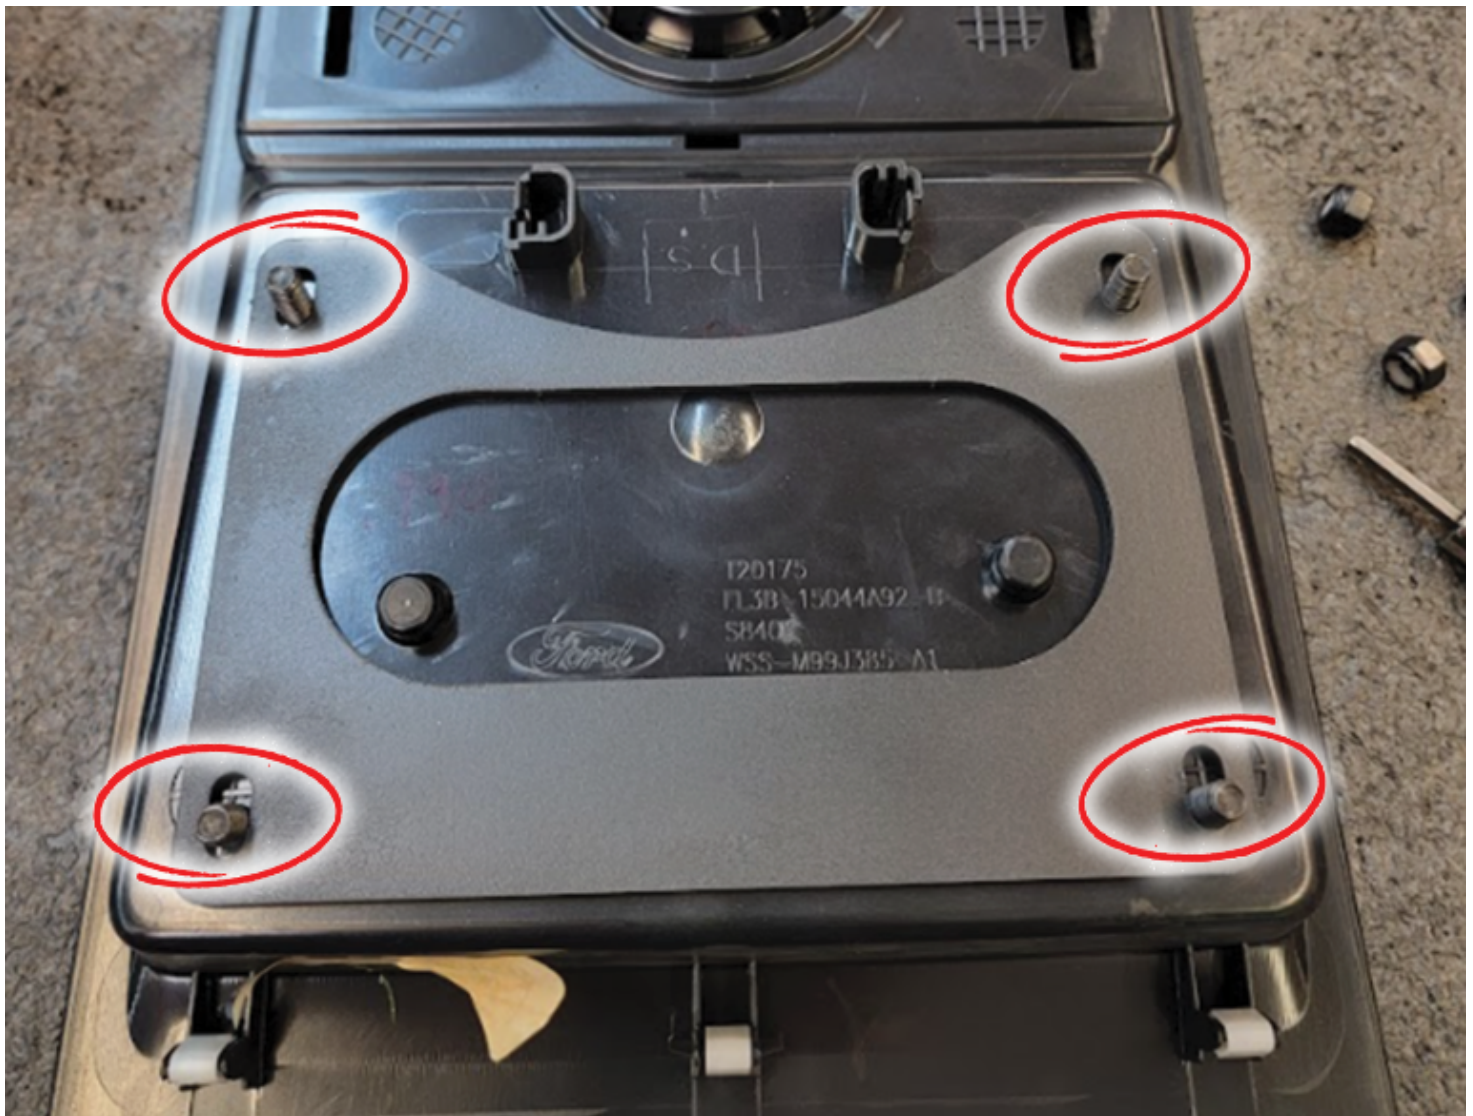Once the clips release, unplug the speaker and side aside.

SPEAKER PLUG

Step 4

Flip the dash piece over and lay it down on something soft to not scratch the top side.

Using the supplied underside support as a template, drill the 4 corner holes shown below.

Step 5

Flip the dash piece back over and install the main dash mount using the supplied hardware, tight all bolts at this time.

Step 6

Reinstall dash piece into dash in the reverse order of removal. Don't forget to plug in the speaker.

Step 7

Enjoy your new Adapt-A-Panel dash mount. Accessories can be secured to it via the slotted holes or using the threaded inserts, sold separately.