

Fork Positioners

Models FFP




The Bolzoni Auramo FFP model fork positioner provides fast and accurate fork positioning as FEM/ITA fork carriers sliding on a chromed bar in order to use the standard forks on the truck with no modification. Visibility strength and versatility are unchanged.

The forks carriers show an oversized structure and consequently this model can be considered the "heavy duty" version of the FR model.

Also available in non sideshift version, FFN model.



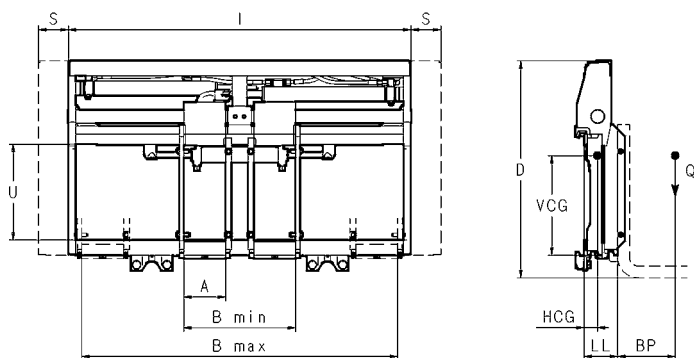

Range: 2500 Kg - 4900 Kg

Plus:

- Separate sideshift.
- Same features as corresponding FP...models, but with ISO 2328 / FEM / ITA fork carriers.
- Standard forks of the truck can be used without modification.
- Fork carriers sliding on a chromed bar with bushings.
- Excellent visibility, strength and versatility.
- Accurate fork positioning, operated on a round chromed bar.

Model	Capacity	Load Centre	Opening Range	Frame Width	Minimum Carriage Width	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Effective Thickness	Support Width	Side Visibility	Mounting Class
	Q kg	BP mm	B mm	I mm	FL mm	D mm	W Kg	HCG mm	VCG mm	LL mm	A mm	U mm	ISO 2328
FFP25X9A	2500	500	335 - 810	940	830	729	114	45	334	113	140	322	2 A
FFP2510A	2500	500	335 - 910	1040	910	729	120	45	334	113	140	322	2 A
FFP2511A	2500	500	335-1020	1150	960	729	127	45	335	113	140	322	2 A
FFP2512A	2500	500	335-1105	1245	960	729	159	47	306	119	140	272	2 A
FFP2514A	2500	500	335-1260	1400	1050	729	171	47	305	119	140	272	2 A
FFP3510B	3500	500	365-960	1100	890	854	165	54	397	135	140	415	3 A
FFP3511B	3500	500	365-1010	1150	890	854	169	54	398	135	140	415	3 A
FFP3512B	3500	500	365-1105	1245	1090	854	177	53	400	135	140	415	3 A
FFP3513B	3500	500	365-1210	1350	1090	854	185	53	401	135	140	415	3 A
FFP4911B	4900	500	440-1005	1150	850	954	283	64	406	145	160	365	3 A
FFP4912B	4900	500	440-1100	1245	900	954	300	64	405	145	160	365	3 A
FFP4913B	4900	500	400-1205	1350	970	954	310	63	404	145	160	365	3 A
FFP4915B	4900	500	440-1405	1550	1200	954	333	62	404	145	160	365	3 A
FFP4916B	4900	500	440-1515	1660	1260	954	346	61	403	145	160	365	3 A
FFP4917B	4900	500	390-1670	1750	1550	862	325	54	382	113	160	365	3 A
FFP4918B	4900	500	390-1730	1850	1550	862	330	54	382	113	160	365	3 A
FFP4920B	4900	500	390-1880	2000	1550	862	340	54	382	113	160	365	3 A

Notes:

- Two hydraulic functions required.
- Sideshift stroke always 100 + 100 mm.
- Delivered without forks. Original lift truck forks can be fitted without any modification.

Options:

- Special widths.
- Flow divider valve.
- Pressure relief valve.
- Load backrest.
- Check valve for low clamping pressure



79001302