

Tire Clamp

RA-NE



Bolzoni Auramo RA-NE series tire clamps are an excellent choice for handling tires and tire stacks of large diameters.

Lifting capacity and opening range can be determined by the customer's need.


RA-NE series tire clamps can handle loads up to 1000 kg. Pivoting arm movement enables a wide opening range of 1600mm. Short arm is hydraulically positionable.

Well-proven 180-degree rotation with a rack-and-pinion mechanism gives fast and high-torque rotation in both vertical and horizontal positions. Vertical end positions have a hydraulic cushioning.



Range: 1000 Kg

- Rotating clamp for vertical and horizontal handling of tires and tire stacks.
- Pivoting arm movement, short and long arms.
- Several contact pad options in standard series.
- 180-degree rotation. Hydraulic cushioning in the vertical positions.

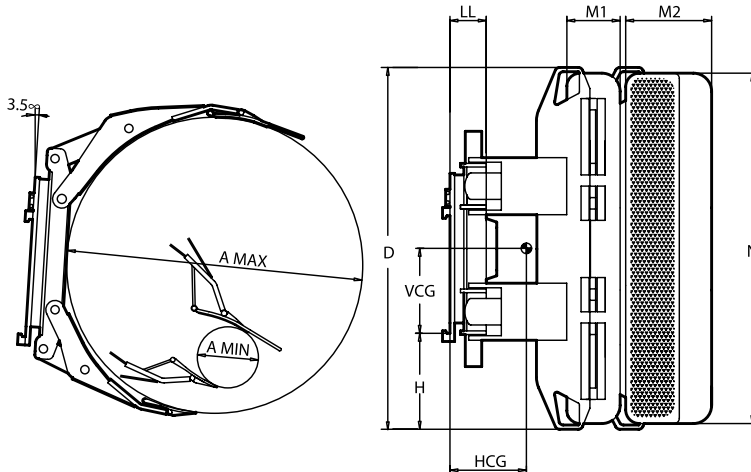

Model	Capacity	Load Centre	Roll Range	Height	Weight	Horizontal Centre of Gravity	Vertical Centre of Gravity	Thickness	Contact pads	Contact Pad Gap	Mounting Height	Mounting Class
	<i>Q</i> kg	<i>BP</i> mm	<i>B</i> mm	<i>D</i> mm	<i>W</i> Kg	<i>HCG</i> mm	<i>VCG</i> mm	<i>LL</i> mm	<i>M1/M2 x N</i> mm	<i>O</i> mm	<i>H</i> mm	<i>ISO</i> 2328
RA-150-NE	1.000	650	500-1.300	1.840	800	370	365	180	250/410x1.800	-	x	2 A
RA-150-NE	1.000	800	500-1.600	1.840	850	390	365	180	250/410x1.800	-	x	2 A

Notes:

- Two hydraulic functions.
- Standard contact pads: rubber faced.
- For bilge handling, 5-degree forward tilt on upright is required. For 0-degree tilt, special arms are available.

Options:

- Special arms for 0-degree tilt.
- Special contact pad sizes.
- Higher lifting capacities.

