





Turbosmart 50mm Plumback | WSRD Spec Blow Off Valve



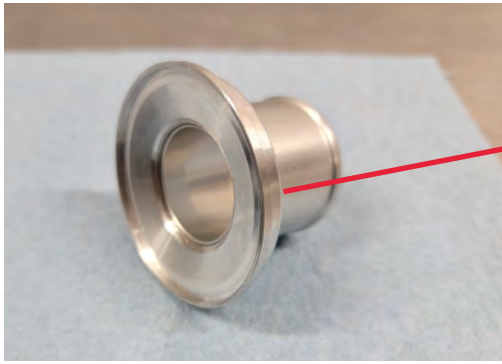

Main BOV flange adapter - Adapts 38mm to our 50mm BOV.

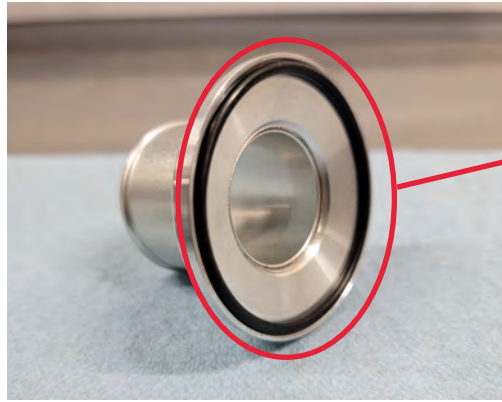

Main flange adapter to BOV body O-ring




Main BOV flange to adapter v-band



Allen headed bolt side



Threaded nut side of v-band

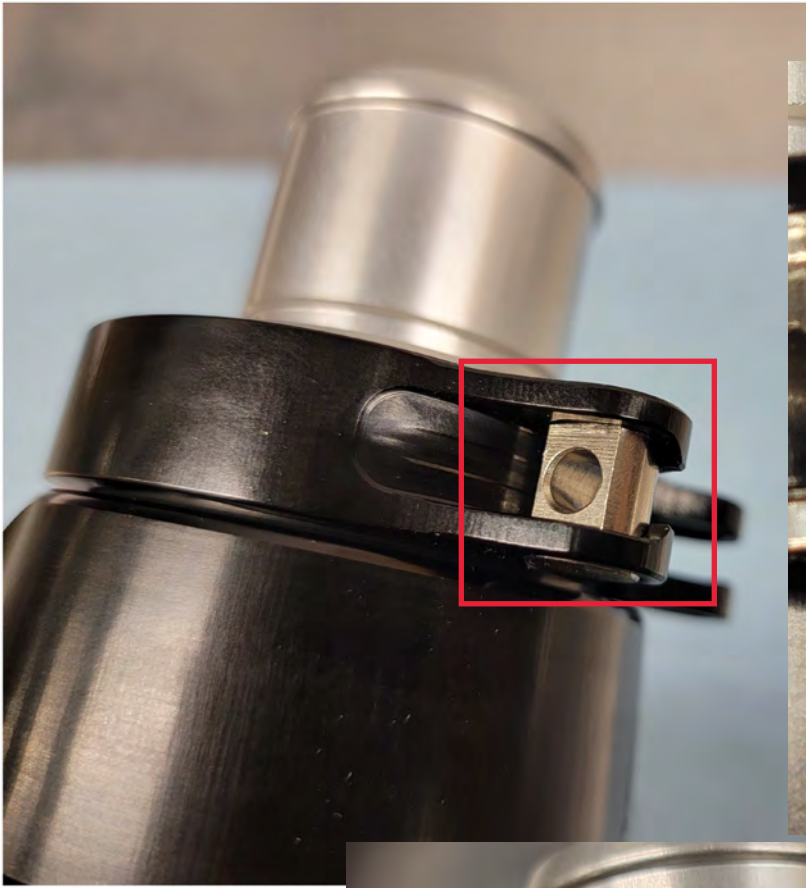

- If not configured in this manner. The provided v-band flange bolt will "bottom out" and it'll cause an issue/boost leak.
- The threaded nut, as pictured, has to have the inset to where the threads actually start. That will give the bolt the proper depth and will tighten correctly.