


## TEMPERATURE DISPLAY

In slow mode:  
Temperature measurement in °C or °F depending on the UNITS.





In fast mode:  
No temperature compensation. Last measured temperature is displayed. Momentarily move to "slow" to compensate for temperature.


 is displayed when the force has exceeded the trigger value (4 kN default) and the device is recording data. Only in fast mode.

LOADED is displayed when the device is in fast mode and loaded above the trigger value. To re-trigger, unload or switch to slow momentarily. This is to avoid continuous re-triggering.

OVERLOADED is displayed when force exceeds the maximum value of 20.0 kN and indicates the device is no longer safe to use in life-critical applications. The device continues to function normally.

## BATTERY INDICATION

-  Full battery
-  40-80% remaining
-  10-40% remaining
-  Battery empty, logging disabled

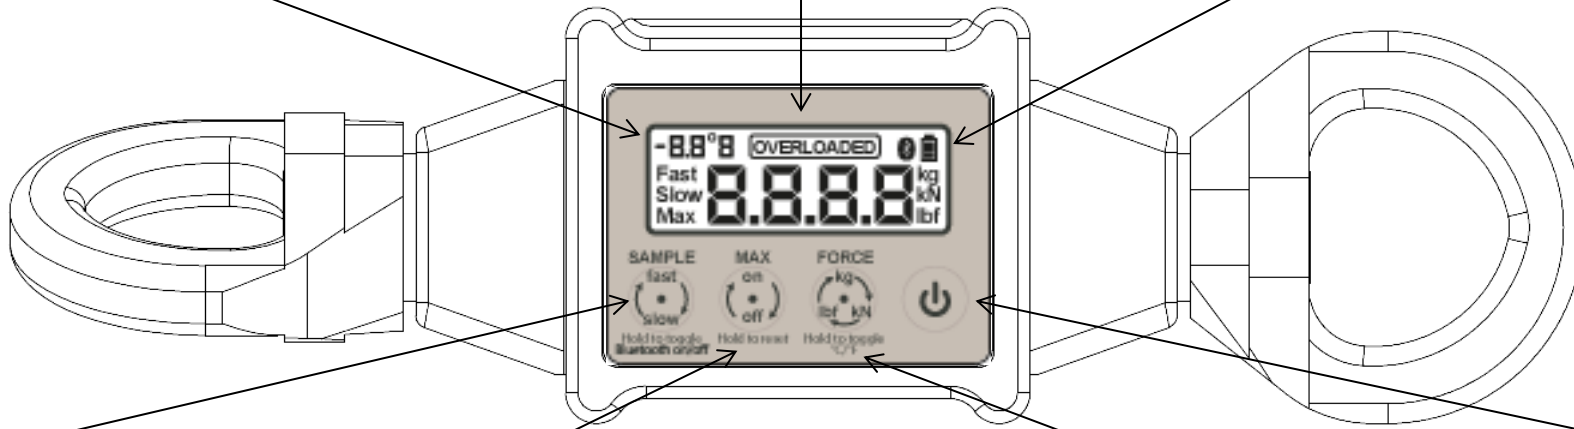

## SAMPLE

Press to toggle between:

- slow 2 samples/second  
Best battery performance.
- fast 500 samples/second.  
Use to capture dynamic events. Trigger enabled. No temperature compensation in fast mode.

Hold to turn Bluetooth on/off  
- Bluetooth sign in upper right corner indicates Bluetooth is on.

## MAX

Press to display maximum value:

- on Maximum value displayed. Max indicated in lower left.
- off currently measured value displayed.

Hold to reset the maximum value.

## FORCE

Press to change between:

- kN ±0.1 kN, max 20.0 kN
- kg ±10 kg, max 2040 kg
- lbf ±20 lbf, max 4500 lbf

Hold to switch between:  
- °C  
- °F

## POWER

Hold for 2s to turn on and off

RESET ZERO: Press POWER and FORCE simultaneously.

# ENFORCER

Quick Reference Card v1.1