

IMPROVED BATTERY LIFE

1000VA ~ 3000VA

DAT+ has got a number of smart features that increase battery life. Thanks to the new Battery Discharge protection control function, it's perfect for medium voltage substations applications.



PERFECT FOR:



Servers



Telecom



Audio-Video



Medium voltage substation



Healthcare

FEATURES



- Online double conversion VFI protection from 1000VA to 3000VA
- Extreme battery lifetime thanks to:
 - wide input voltage tolerance (110-300V)
 - wide input frequency tolerance (44-66Hz)
 - intelligent battery management
- Battery discharge level control, settable 30-100% of the available capacity
- Precise patented backup time estimation
- 2 programmable IEC outlets plus two Schuko
- Cold start to activate loads without mains
- Multiple operation modes to maximize energy efficiency
- Strong overload capability to improve CB's selectivity
- Manually activated extra service check
- Firmware upgradable for updates and customization
- Remote EPO and On/Off functions
- RS232 and USB port, comm. slot
- CEI 0-16 compliant

OPTIONS




- USB card, RS485 card, dry contact relay card, SNMP/web card
- Extra RS232 card
- External battery cabinet
- Different outlets
- LED interface

WHAT'S IN THE BOX




- Input power cable
- Output power cable

BATTERY DISCHARGE LEVEL CONTROL



- 1) Set your battery discharge percent level (3-100%)
- 2) When UPS is in battery mode, it stops when the set battery level is reached
- 3) UPS will be capable to turn on and discharge battery completely upon subsequent cold start

SPECIFICATIONS

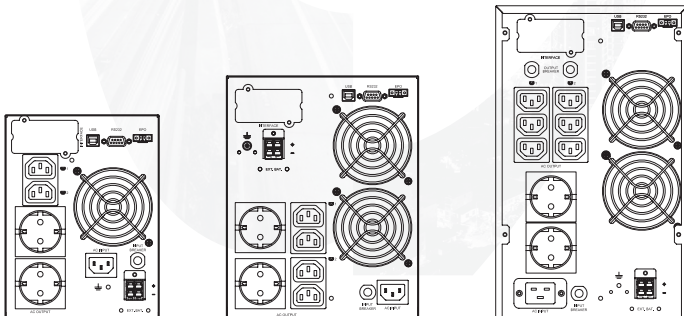MODEL		DAT 1000+	DAT 2000+	DAT 3000+		
INPUT	Phase	Single phase				
	Voltage Range*	110~300Vac				
	Frequency Range	44~66Hz (Auto sensing)				
	Input Power Factor	>0.99 @ 100% linear load				
OUTPUT	Capacity	1000VA/900W	2000VA/1800W	3000VA/2700W		
	Output Voltage	220/208/220/230/240 Vac				
	Output Power Factor	0.9				
	Output Voltage Distortion	<3% @ 100% Linear load <7% @ 100% non-linear load				
	Output Voltage Regulation	±1%				
	Frequency Range	±1Hz or ±3Hz (selectable)				
	Crest Factor	3:1				
	Output Waveform	Pure SineWave				
EFFICIENCY	Line Mode	Up to 92%				
	High Efficiency Mode	Up to 96,5%				
PHYSICAL	Dimensions (WxHxD, mm)	154x211x382.4	192x250x470	192x319.9x486	192x319.9x552.8	
	Net Weight (kg)	11.6	22.2	29.8	42.4	
BATTERY	Capacity	12Vdc/7AH		12Vdc/9AH		
	Battery Number	3	6	6	12	
	Battery Voltage	36	72	72	72	
	Recharge Time (to 90%)	4 hours				
	Battery Bank	Code	BT060367-0000	BT120727-0000		
		Number of batteries	6	12		
		Battery type	Lead acid maintenance free 12V 7Ah/9Ah			
	Dimensions (WxHxD, mm)	154 x 258.2 x 403.6	192 x 319.9 x 552.8			
DISPLAY	LCD measures	Voltage/Frequency/Load level/Battery voltage/ Output current/Estimated back-up time/ Temperature				
	Self-Diagnostics	Upon power-on, Front panel setting & software control, 24 hours routine check				
ALARM	Audible or Visual	Line failure/Battery low/Transfer to bypass/System fault				
PROTECTION	Full protection	Overload, over temperature, short circuit, deep discharge, overcharge				
FUNCTION	Multi-Mode	Normal/ECO/CVCF				
	DC Start	Yes				
ENVIRONMENT	Operation Temperature	0~40°C				
	Operation Humidity	0%-90% (without condensing)				
	Altitude	1000m without derating				
	Noise Level	≤ 50dBA @ 1 meter front				
INTERFACE	Standard	RS-232, EPO, USB, Comm. Slot				
	Option	Dry contact card, SNMP/Web card, RS485				
	Compatible platforms	Microsoft Windows series, Linux, Mac				
STANDARDS & CERTIFICATIONS	Safety & EMC	IEC EN 62040-1, IEC EN 62040-2				
	Performance	IEC EN 62040-3				
	Marks	CE				
BACK PANELS	DAT 1000/2000/3000+					
		<p>* Based on load percentage Specifications subject to change without notice</p>				