




**Features:**

- 0-10V/ Potentiometer/10V PWM dimmable
- Constant voltage design
- Universal AC input/ Full range
- IP66 design for indoor or outdoor installations
- Protections: Short circuit/ Overload/ Over voltage/ Over temp.
- Built-in PFC function (PFC>0.98)
- Cooling by free air convection
- Over 83% efficiency



| Model        |                            | ELED-100-12V  | ELED-100-24V  |
|--------------|----------------------------|---|---------------|
| Output       | DC Voltage                 | 12V   | 24V           |
|              | Rated current              | 8.3A  | 4.15A         |
|              | Voltage accuracy           | ±0.5V   | ±0.5V         |
|              | Rated power                | 99.6W   | 99.6W         |
| Input        | Voltage Range              | 100-265VAC  |               |
|              | Frequency Range            | 47-63HZ   |               |
|              | Power Factor ( Typ.)       | PF ≥ 0.98/220V  |               |
|              | Full Load Efficiency(Typ.) | 83%   | 85%           |
|              | AC Current(Typ.)           | 0.559A/220VAC   | 0.546A/220VAC |
|              | Leakage current            | <0.25mA/220VAC  |               |
| Protection   | Short Circuit              | Hiccup mode, recovers automatically after fault condition is removed.   |               |
|              | Over voltage               | ≤280VAC   |               |
|              | Over temperature           | 100°C±10°C shut down o/p voltage, re-power on to recover                |               |
| Environment  | Working TEMP.              | -40~+60°C   |               |
|              | Working Humidity           | 20~95%RH,non-condensing   |               |
|              | Storage TEMP., Humidity    | -40~+80°C,10~95%RH  |               |
|              | TEMP.coefficient           | ±0.03%/°C(0-50°C)   |               |
|              | Vibration                  | 10~500Hz,5G 12min./1 cycle, period for 72min.each along X,Y,Z axes.     |               |
| Safety & EMC | Safety standards           | EN61347-2-13, IP66  |               |
|              | Withstand voltage          | I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC                         |               |
|              | Isolation resistance       | I/P-O/P I/P-FG O/P-FG: 100MΩ/500VDC/25°C/70%RH                          |               |
|              | EMC EMISSION               | Compliance to EN55015, EN61000-3-2 ( ≥ 50%load)                         |               |
|              | EMC IMMUNITY               | Compliance to EN61000-4-2,3,4,5,6,8, 11, EN61547,A light industry level |               |
| Others       | Dimensions                 | 230*68*45mm(L*W*H)  |               |
|              | Packing                    | 1.2Kg; 10pcs/ 12.8Kg  |               |

## Mechanical Specification

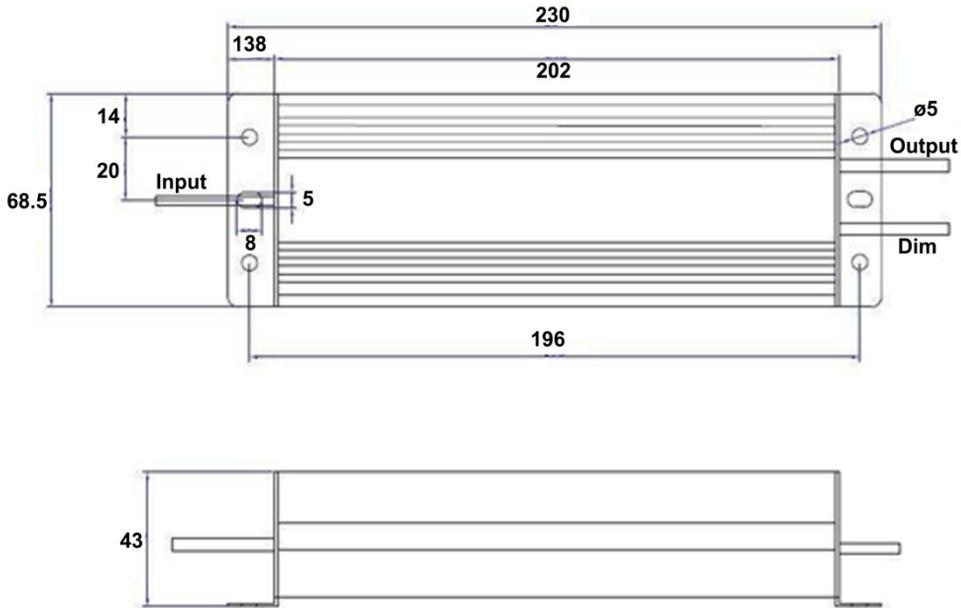

## Dimming Operation

- Built-in 3 in 1 dimming function, IP66 rated .Output constant voltage level can be adjusted through output cable by connection a resistance or 1-10V DC or 10V PWM signal between DIM+ and DIM-

Reference resistance value for output voltage control (Typical)

| Resistance Value            | Single driver    | 0Ω    | 10KΩ    | 20KΩ    | 30KΩ    | 40KΩ    | 50KΩ    | 60KΩ    | 70KΩ    | 80KΩ    | 90KΩ    | 100KΩ    | OPEN     |
|-----------------------------|------------------|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|----------|----------|
|                             | Multiple drivers | 0Ω /N | 10KΩ /N | 20KΩ /N | 30KΩ /N | 40KΩ /N | 50KΩ /N | 60KΩ /N | 70KΩ /N | 80KΩ /N | 90KΩ /N | 100KΩ /N | -----    |
| Percentage of rated current |                  | 0%    | 10%     | 20%     | 30%     | 40%     | 50%     | 60%     | 70%     | 80%     | 90%     | 100%     | 102~108% |

1-10V/ 0-10V dimmable function for output voltage control (Typical)

| Dimming value               | 0V | 1V  | 2V  | 3V  | 4V  | 5V  | 6V  | 7V  | 8V  | 9V  | 10V  | OPEN     |
|-----------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102~108% |

10V PWM signal for output voltage control (Typical): Frequency range: 100Hz-3KHz

| Duty value                  | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN     |
|-----------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102~108% |