

# TrueConnect™ - Rack Mounted Combiner/Distribution Tray


Model No: CU/8

## Rack Mounted Combiner Tray 600-960 & 1710-2700 MHz

### DESCRIPTION:

This combining tray allows for the combining and distribution of signals from DAS remotes to a broadband antenna. It features 16 inputs and 8 outputs. All 8 outputs have the signals from all inputs to feed different antenna paths. It has one 4.3-10 female input port specifically designed for the insertion of 2.5 GHz signal

Specifications		
Frequency Range (MHz)	Low Band	Low Band 600-960
	High Band	High Band 1700-2700
Insertion Loss (dB)	≤10.0	
Isolation (dB)	Same system >20, Different system >50	
Return Loss (dB)	≥18	
Connectors	Input	15 QMA Female, 1 4.3-10 Female
	Output	N Female
Power Rating (W)	10	
Impedance (Ω)	50	
Operating Temperature °F (°C)	-40 to 150 (-40 to 65)	
Operational Humidity	0-95%	
Environmental Class	IP65 (Indoor)	
Size	1RU	

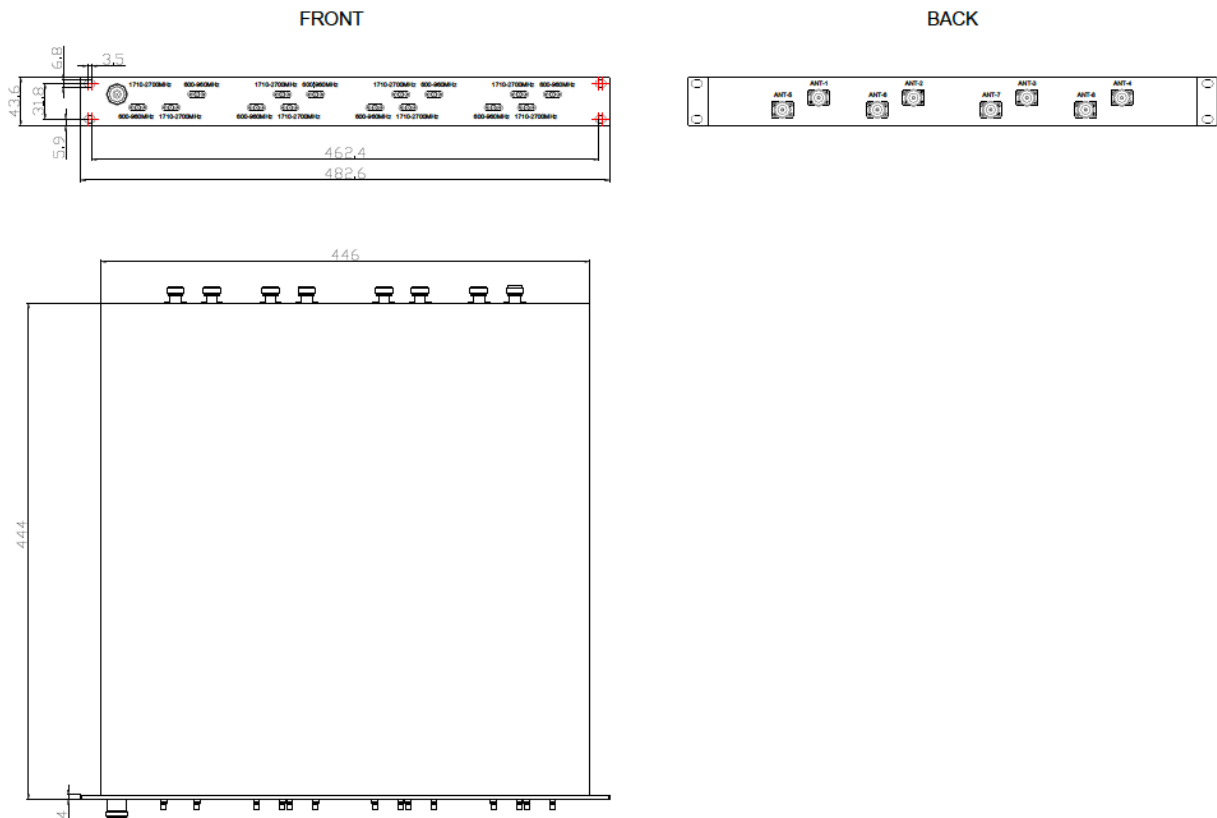

# TrueConnect™ - Rack Mounted Combiner/Distribution Tray

Model No: CU/8

## Rack Mounted Combiner Tray 600-960 & 1710-2700 MHz

Block Diagram

