



## Power Splitters [340-960/1710-2700 MHz]

### DESCRIPTION:




Used in DAS systems for signal splitting  
Low PIM  
Low insertion loss  
High power rating  
Has 4.3/10 female connectors

### Specifications

Frequency Range (MHz)	340-2700			
Power Rating, Combining (W)	30			
Power Rating, Splitting (W)	300			
Peak Power (kW)	3			
Impedance (Ω)	50			
Intermodulation (PIM) 2 X 43 dBm	≤-162 dBc			
	Split	2	3	4
Insertion Loss (dB)		0.3	0.4	0.5
Split Loss (dB)		3	4.8	6
VSWR		1.2	1.2	1.3
Weight - lbs (kg)		.64 (.29)	.89 (.38)	.93 (.42)
Operating temperature - °F (°C)	-31 to +185 (-35 to +85)			
Environmental	IP65 Indoor/Outdoor			

### ADDITIONAL INFORMATION:

Mounting bracket included.

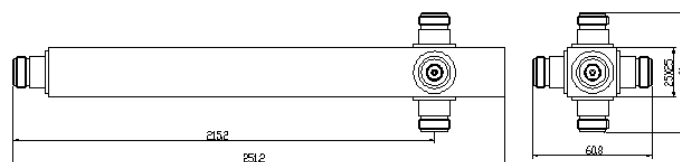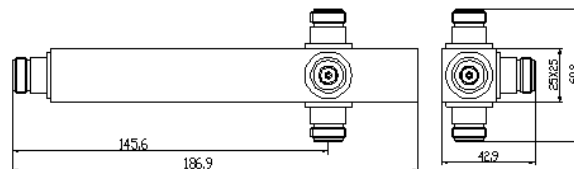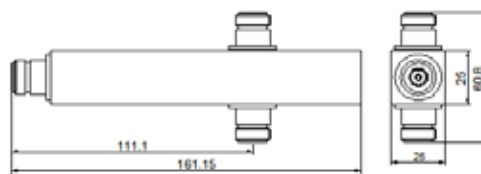

Drawing is for reference only