Wireless Supply
Higher Standards. Superior Quality.

TrueConnect™ - Variable Attenuator

Model No: VAT30/NF

30 dB Variable Attenuator, Adjusted in 1 dB steps

DESCRIPTION:
Designed for installations where variable attenuation levels are required for balancing RF signals.

Specifications	
Frequency Range (MHz)	DC-2700
Attenuation Range	0-30 dB in 1 dB steps
VSWR	≤1.25:1
Insertion Loss (dB)	<1.0
Impedance (Ω)	50
Power Rating (W)	2
Peak Power (W)	100 *
Connector	N-Female
Dimensions (in)	Φ 1.50 X 4.72
Operating temperature - °F	-67 ≈ 185

* Pulse width 5 microseconds, duty ratio is 1%

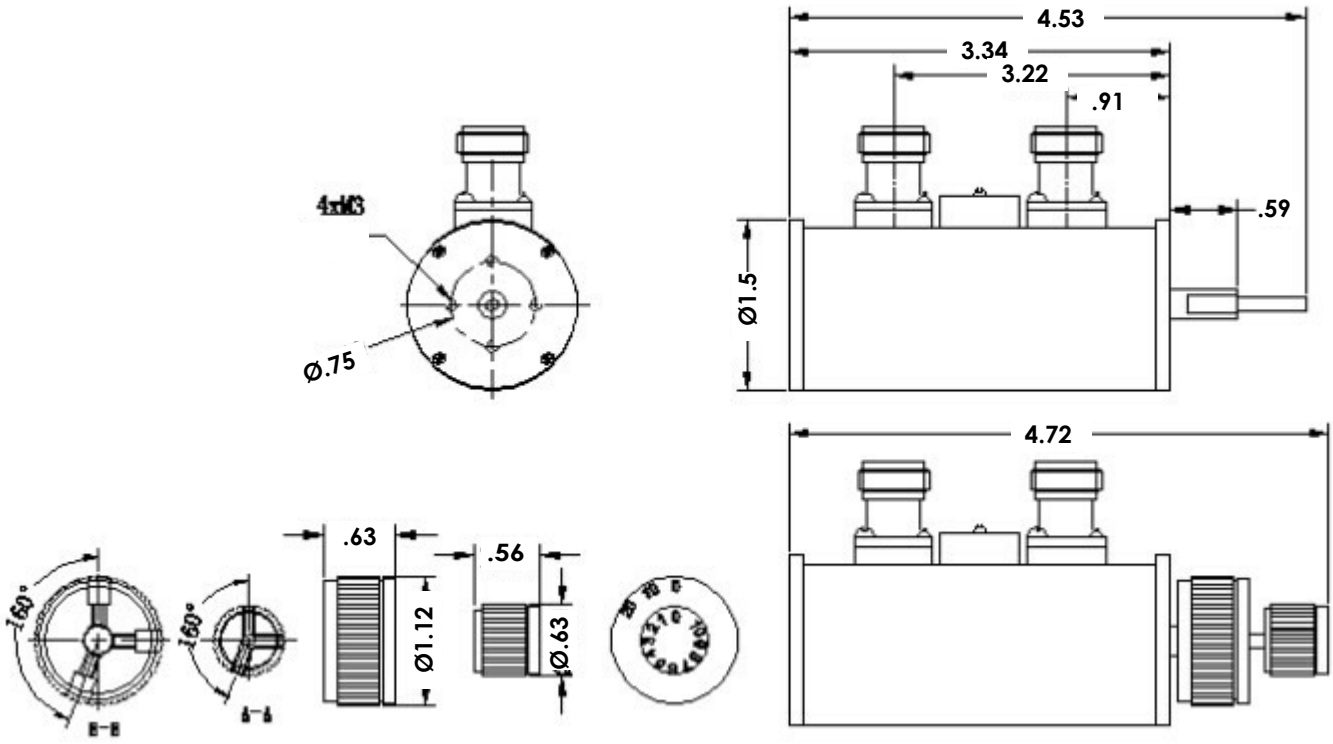

© 2016 All rights reserved. Proprietary infomation. Wireless Supply reserves the right to modify or amend specifications without prior notice.