

COTEK



AE/AEK Series

800~3KW Programmable Power Supply



AE-800



AE-1500



AE-3000



AEK-3000

DC Output Voltage
Up to 400V

- Universal AC input / Full range
- Programmable output voltage (0% ~ 105%)
- Programmable output current (0% ~ 105%)
- High power density 16.3W / inch³
- Current sharing
- Constant current limit
- Full product portfolio(12~400VDC)

- Selectable +5V / 0.5A or +9V / 0.3A auxiliary output
- Global control
- Remote setting multiple PSU via RS232, RS485 & I²C
- Remote ON / OFF, Remote sense function
- Protection: OVP, OLP, OTP, SCP, Fan failure
- FCC Class B

User Benefits



- Energy saving-Efficiency > 90%
- Wide O/P voltage and current programmable range 0~105%
- Space saving-High power density 16.3W/inch³



Compact Dimension

Low profile design



Global Control

Remote setting
PSU setting via RS232/485 I²C



Battery Charging

Constant current and voltage control



Wide DC O/P range

Suitable for various application



Fan speed controlled by Load and Temperature

Suitable for low load & audible sensitive application



Front-end access

(Input & Output at the same side)
Easy installation

Work Smarter, Not Harder!

Through CT controller board integration, it's now possible to set output voltage and current of multiple COTEK Power Supplies (up to max 8) via single point.



AE series



CT controller board



laptop/computer



Benefits




- Setting 8 power supplies from single point to increase production efficiency
- Easy and accurate output voltage and current adjustment
- Data & Status query from PC
- Easy maintenance

Specification




AE Series

800W~3000W Programmable Power Supply

		Model	AE-800-12	AE-800-15	AE-800-24	AE-800-30	AE-800-36	AE-800-48	AE-800-60
 Output	DC Voltage		12V	15V	24V	30V	36V	48V	60V
	Rated Current		66.7A	53.4A	33.5A	26.7A	22.3A	16.7A	13.4A
	Ripple & Noise (Max.)		120mVp-p	150mVp-p	240mVp-p	300mVp-p	360mVp-p	480mVp-p	600mVp-p
	Voltage Adj. Range		± 5.0% Typical adjustment by potentiometer. (VR1)						
Input	Voltage Range		90 ~ 264VAC, 127 ~ 370VDC						
	Efficiency (Typ.)		89%	90%	92%	92%	92%	92%	93%
		Model	AE-1500-12	AE-1500-15	AE-1500-24	AE-1500-30	AE-1500-36	AE-1500-48	AE-1500-60
 Output	DC Voltage		12V	15V	24V	30V	36V	48V	60V
	Rated Current		125A	100A	62.5A	50A	41.7A	31.3A	25A
	Ripple & Noise (Max.)		150mVp-p	150mVp-p	240mVp-p	300mVp-p	360mVp-p	480mVp-p	600mVp-p
	Voltage Adj. Range		± 5.0% Typical adjustment by potentiometer. (VR1)						
Input	Voltage Range		90 ~ 264VAC, 127 ~ 370VDC						
	Efficiency (Typ.)		89%	90%	92%	92%	92%	92%	93%
		Model	AE-3000-12	AE-3000-15	AE-3000-24	AE-3000-30	AE-3000-36	AE-3000-48	AE-3000-60
 Output	DC Voltage		12V	15V	24V	30V	36V	48V	60V
	Rated Current		250A	200A	125A	100A	83.5A	62.5A	50A
	Ripple & Noise (Max.)		150mVp-p	150mVp-p	240mVp-p	300mVp-p	360mVp-p	480mVp-p	600mVp-p
	Voltage Adj. Range		± 5.0% Typical adjustment by potentiometer. (VR1)						
Input	Voltage Range		90 ~ 264VAC, 127 ~ 370VDC						
	Efficiency (Typ.)		89%	90%	91%	91%	92%	92%	93%


AEK Series

Low Profile 3000W Programmable Power Supply

		Model	AEK-3000-12	AEK-3000-15	AEK-3000-24	AEK-3000-30	AEK-3000-36	AEK-3000-48	AEK-3000-60
 Output	DC Voltage		12V	15V	24V	30V	36V	48V	60V
	Rated Current		200A	160A	125A	100A	83.5A	62.5A	50A
	Rated Power*		2400W	2400W	3000W	3000W	3006W	3000W	3000W
	Ripple & Noise (Max.)		150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	300mVp-p
	Voltage Adj. Range		± 5.0% Typical adjustment by potentiometer. (VR1)						
Input	Voltage Range		90 ~ 264VAC, 127 ~ 370VDC						
	Efficiency (Typ.)		88%	89%	91%	91%	92%	92%	93%

AE/AEK Series

Programmable High DC Voltage Output


		Model	AEK-3000-150	AEK-3000-200	AEK-3000-250	AEK-3000-300	AEK-3000-400	AE-1500-120	
 Output	DC Voltage		150V	200V	250V	300V	400V	120V	
	Rated Current		20A	15A	12A	10A	7.5A	12.5A	
	Rated Power*		3000W	3000W	3000W	3000W	3000W	1500W	
	Ripple & Noise (Max.)		1500mVp-p						1200mVp-p
	Voltage Adj. Range		± 5.0% Typical adjustment by potentiometer. (VR1)						
Input	Voltage Range		90 ~ 264VAC, 127 ~ 370VDC						
	Efficiency (Typ.)		93%						

* Subject to change without prior notice *Power de-rating if AC input is <180VAC. Please refer to data sheet for the de-rating curve.




Dimension

AE Series

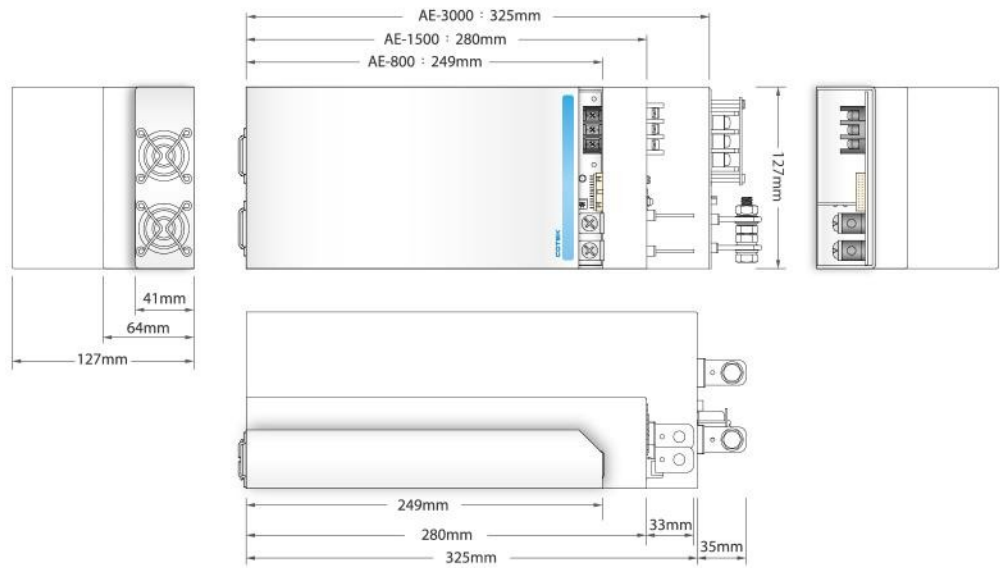

AEK Series

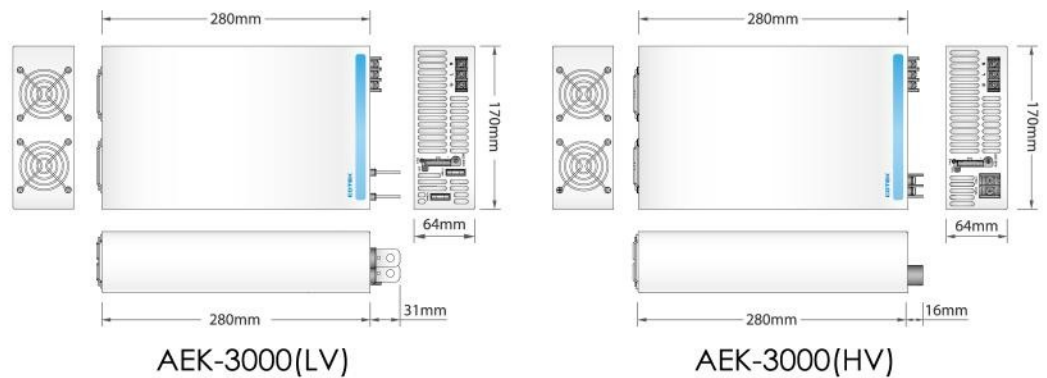

About COTEK



COTEK is committed to providing proactive service, innovative technology and total quality assurance since we were established in 1986. With Corporate Offices in Tao-yuan, Taiwan, COTEK is a technology-oriented company focusing on developing, designing and manufacturing products including:

- AC/DC Switching Mode Power Supply-5 Watts ~ 3,000 Watts
- LED Driver
- DC/AC Pure Sine Wave inverter-150 Watts ~ 4,000 Watts
- Inverter/Charger
- Battery Charger

Contact Us

No.33, Sec. 2, Renhe Rd., Daxi Dist., Taoyuan City 33548, Taiwan
 Phone : +886-3-3891999 FAX : +886-3-3802333
 http : // www.cotek.com.tw

